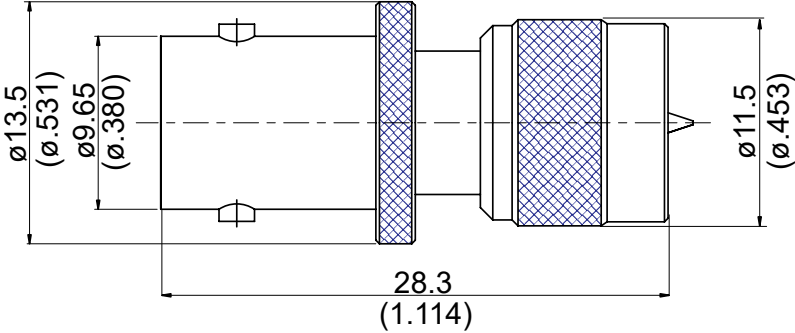


AD-B8MU3	BNC Jack To Mini UHF Plug 2.5GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 10.29 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8MU3	BNC Jack To Mini UHF Plug 2.5GHz VSWR 1.2	
Interface	BNC	Mini UHF
Standard	MIL-STD-348B	Jyebao Mini UHF
Electrical Data		
Impedance	50Ω	
Frequency Range	DC To 2.5GHz	
VSWR	≤ 1.2 (DC To 2.5GHz)	
Insertion Loss	≤ 0.05 x √f(GHz) dB	
Insulation Resistance	≥ 5000MΩ	
Dielectric Withstanding Voltage (at sea level)	1000 V rms	
Working Voltage (at sea level)	335 V rms	
Mechanical Data		
	BNC	Mini UHF
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	NA
Contact Captivation-axial	≥ 6.1 lbs	≥ 4.5 lbs
Durability (mating)	≥ 500	≥ 500
Environmental Data		
Temperature Range	-65°C to +165°C	
Thermal Shock	MIL-STD-202, Method 107, Condition B	
Moisture Resistance	MIL-STD-202, Method 206	
Corrosion	MIL-STD-202, Method 101, Condition B	
RoHS	Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.