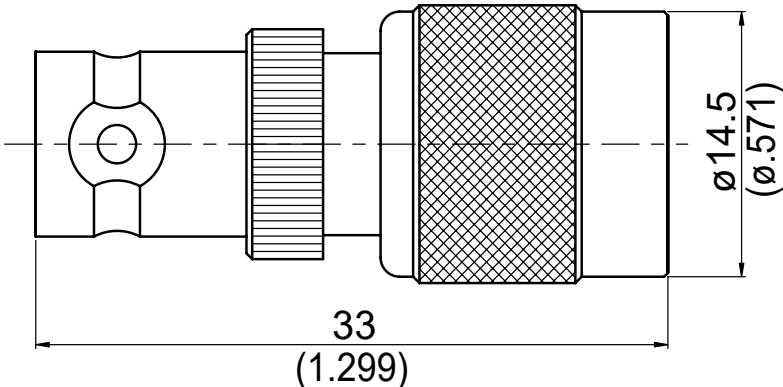


AD-B8T3-75	BNC Jack To TNC Plug 3GHz VSWR 1.2		75Ω																																				
																																							
<table><tr><th>Parts</th><th>Material</th><th colspan="2">Plating (Micro-inch)</th></tr><tr><td>Contact Pin</td><td>Phosphor Bronze</td><td colspan="2">Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Insulator</td><td>Teflon</td><td colspan="2"></td></tr><tr><td>Gasket</td><td>Silicon</td><td colspan="2"></td></tr><tr><td>Body</td><td>Brass</td><td colspan="2">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Spring</td><td>Delrin</td><td colspan="2"></td></tr><tr><td>Washer</td><td>Brass</td><td colspan="2">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Lock Washer</td><td>Brass</td><td colspan="2">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Coupling Nut</td><td>Brass</td><td colspan="2" rowspan="2">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>				Parts	Material	Plating (Micro-inch)		Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20		Insulator	Teflon			Gasket	Silicon			Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		Spring	Delrin			Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Parts	Material	Plating (Micro-inch)																																					
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																																					
Insulator	Teflon																																						
Gasket	Silicon																																						
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																					
Spring	Delrin																																						
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																					
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																					
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																					
Weight: 16.95 g																																							

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8T3-75		BNC Jack To TNC Plug 3GHz VSWR 1.2	
Interface		BNC	TNC
Standard		MIL-STD-348B	MIL-STD-348B
Electrical Data			
Impedance	75Ω		
Frequency Range	DC To 3GHz		
VSWR	≤ 1.2 (DC To 3GHz)		
Insertion Loss	≤ 0.06 x √f(GHz) dB		
Insulation Resistance	≥ 5000MΩ		
Dielectric Withstanding Voltage (at sea level)	1500 V rms		
Working Voltage (at sea level)	500 V rms		
Mechanical Data			
	BNC	TNC	
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	4.1 to 6.1 in-lbs	
Coupling Proof Torque	NA	15 in-lbs	
Coupling Nut Retention Force	NA	≥ 101.2 lbs	
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs	
Durability (mating)	≥ 500	≥ 500	
Environmental Data			
Temperature Range	-40°C to +120°C		
Thermal Shock	MIL-STD-202, Method 107, Condition B		
Moisture Resistance	MIL-STD-202, Method 206		
Corrosion	MIL-STD-202, Method 101, Condition B		
RoHS	Compliant		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.