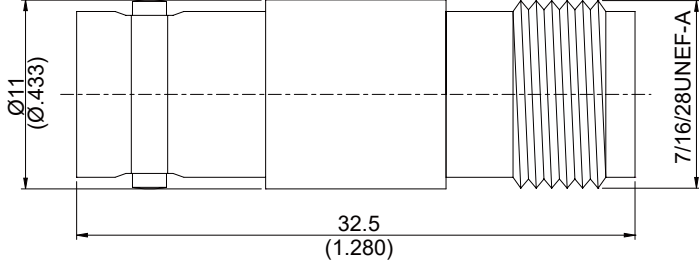


AD-B8T9	BNC Jack to TNC Reverse Polarity Jack 4GHz VSWR 1.2	50Ω												
														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Insulator	Teflon		Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)												
Insulator	Teflon													
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50												
Weight:														

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-B8T9	BNC Jack to TNC Reverse Polarity Jack 4GHz VSWR 1.2																						
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard Polarity BNC Jack Side Per MIL-STD-348B</p> <p>Reverse Polarity TNC Jack Side Per JYEBAO TNC Reverse Polarity Jack derived from MIL-STD-348B</p>																							
<div data-bbox="129 745 531 795" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2">DC To 4GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2">≤ 1.2 (DC To 4GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2">1500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2">500 V rms</td> </tr> </table>			Impedance	50Ω		Frequency Range	DC To 4GHz		VSWR	≤ 1.2 (DC To 4GHz)		Insertion Loss	≤ 0.06 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1500 V rms		Working Voltage (at sea level)	500 V rms	
Impedance	50Ω																						
Frequency Range	DC To 4GHz																						
VSWR	≤ 1.2 (DC To 4GHz)																						
Insertion Loss	≤ 0.06 x √f(GHz) dB																						
Insulation Resistance	≥ 5000MΩ																						
Dielectric Withstanding Voltage (at sea level)	1500 V rms																						
Working Voltage (at sea level)	500 V rms																						
<div data-bbox="129 1245 531 1294" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">BNC</th> <th style="width: 25%;">TNC</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">0.6 to 2.5 in-lbs</td> <td style="text-align: center;">4.1 to 6.1 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">NA</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.1 lbs</td> <td style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>				BNC	TNC	Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	4.1 to 6.1 in-lbs	Coupling Proof Torque	NA	15 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs	Durability (mating)	≥ 500	≥ 500						
	BNC	TNC																					
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	4.1 to 6.1 in-lbs																					
Coupling Proof Torque	NA	15 in-lbs																					
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs																					
Durability (mating)	≥ 500	≥ 500																					
<div data-bbox="129 1753 531 1803" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2">-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2">Compliant</td> </tr> </table>			Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Temperature Range	-65°C to +165°C																						
Thermal Shock	MIL-STD-202, Method 107, Condition B																						
Moisture Resistance	MIL-STD-202, Method 206																						
Corrosion	MIL-STD-202, Method 101, Condition B																						
RoHS	Compliant																						

Notice: JYEBAO reserves the right to make modifications deemed appropriate.