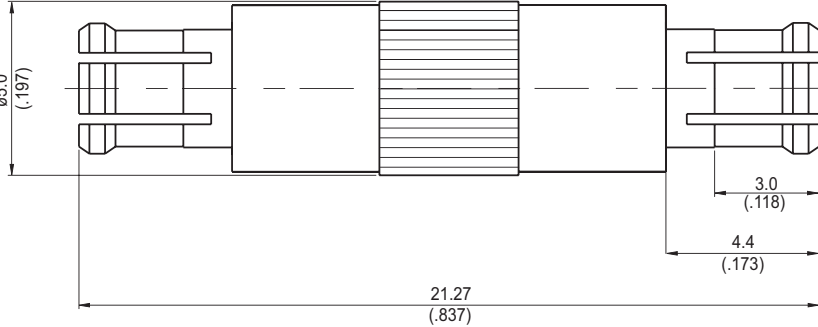


AD-D3D3	MCX Plug To MCX Plug 6GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Weight: 1.65 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-D3D3	MCX Plug To MCX Plug 6GHz VSWR 1.2														
<table border="0"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td data-bbox="531 324 1482 392"></td> </tr> <tr> <td data-bbox="113 392 531 510">Standard</td> <td data-bbox="531 392 1482 510">IEC 61169-36</td> </tr> </table>		Interface		Standard	IEC 61169-36										
Interface															
Standard	IEC 61169-36														
<table border="0"> <tr> <td data-bbox="113 510 531 577">Electrical Data</td> <td data-bbox="531 510 1482 577"></td> </tr> <tr> <td data-bbox="113 577 531 622">Impedance</td> <td data-bbox="531 577 1482 622">50Ω</td> </tr> <tr> <td data-bbox="113 622 531 667">Frequency Range</td> <td data-bbox="531 622 1482 667">DC to 6GHz</td> </tr> <tr> <td data-bbox="113 667 531 712">VSWR</td> <td data-bbox="531 667 1482 712">≤ 1.2 (DC To 6GHz)</td> </tr> <tr> <td data-bbox="113 712 531 757">Insulation Resistance</td> <td data-bbox="531 712 1482 757">≥ 10000MΩ</td> </tr> <tr> <td data-bbox="113 757 531 801">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 757 1482 801">750 V rms</td> </tr> <tr> <td data-bbox="113 801 531 869">Working Voltage (at sea level)</td> <td data-bbox="531 801 1482 869">250 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 6GHz	VSWR	≤ 1.2 (DC To 6GHz)	Insulation Resistance	≥ 10000MΩ	Dielectric Withstanding Voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms
Electrical Data															
Impedance	50Ω														
Frequency Range	DC to 6GHz														
VSWR	≤ 1.2 (DC To 6GHz)														
Insulation Resistance	≥ 10000MΩ														
Dielectric Withstanding Voltage (at sea level)	750 V rms														
Working Voltage (at sea level)	250 V rms														
<table border="0"> <tr> <td data-bbox="113 925 531 992">Mechanical Data</td> <td data-bbox="531 925 1482 992"></td> </tr> <tr> <td data-bbox="113 992 531 1037">Engagement Force</td> <td data-bbox="531 992 1482 1037">≤ 5.6 lbs</td> </tr> <tr> <td data-bbox="113 1037 531 1081">Disengagement Force</td> <td data-bbox="531 1037 1482 1081">1.8 to 4.5 lbs</td> </tr> <tr> <td data-bbox="113 1081 531 1126">Contact Captivation-axial</td> <td data-bbox="531 1081 1482 1126">≥ 2.3 lbs</td> </tr> <tr> <td data-bbox="113 1126 531 1193">Durability (mating)</td> <td data-bbox="531 1126 1482 1193">≥ 500</td> </tr> </table>		Mechanical Data		Engagement Force	≤ 5.6 lbs	Disengagement Force	1.8 to 4.5 lbs	Contact Captivation-axial	≥ 2.3 lbs	Durability (mating)	≥ 500				
Mechanical Data															
Engagement Force	≤ 5.6 lbs														
Disengagement Force	1.8 to 4.5 lbs														
Contact Captivation-axial	≥ 2.3 lbs														
Durability (mating)	≥ 500														
<table border="0"> <tr> <td data-bbox="113 1279 531 1346">Environmental Data</td> <td data-bbox="531 1279 1482 1346"></td> </tr> <tr> <td data-bbox="113 1346 531 1391">Temperature Range</td> <td data-bbox="531 1346 1482 1391">-55°C to +155°C</td> </tr> <tr> <td data-bbox="113 1391 531 1435">Thermal Shock</td> <td data-bbox="531 1391 1482 1435">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1435 531 1480">Moisture Resistance</td> <td data-bbox="531 1435 1482 1480">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1480 531 1525">Corrosion</td> <td data-bbox="531 1480 1482 1525">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1525 531 1570">RoHS</td> <td data-bbox="531 1525 1482 1570">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-55°C to +155°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant		
Environmental Data															
Temperature Range	-55°C to +155°C														
Thermal Shock	MIL-STD-202, Method 107, Condition B														
Moisture Resistance	MIL-STD-202, Method 206														
Corrosion	MIL-STD-202, Method 101, Condition B														
RoHS	Compliant														

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-D3D3

