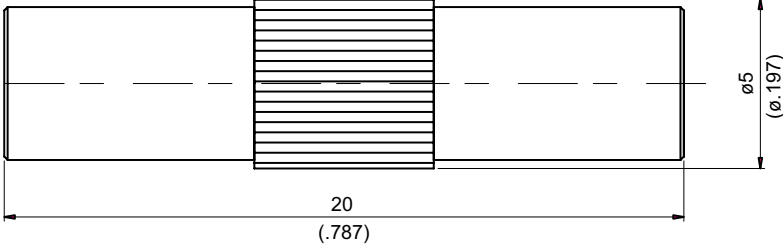


AD-D8D8	MCX Jack To MCX Jack 6GHz VSWR 1.2	50Ω												
														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Body</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon	
Parts	Material	Plating (Micro-inch)												
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Weight: 2.32 g														

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-D8D8	MCX Jack To MCX Jack 6GHz VSWR 1.2
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> <p>Standard IEC 61169-36</p>	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> <p>Impedance 50Ω Frequency Range DC to 6GHz VSWR ≤ 1.2 (DC To 6GHz) Insulation Resistance ≥ 10000MΩ Dielectric Withstanding Voltage (at sea level) 750 V rms Working Voltage (at sea level) 250 V rms</p>	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> <p>Engagement Force ≤ 5.6 lbs Disengagement Force 1.8 to 4.5 lbs Contact Captivation-axial ≥ 2.3 lbs Durability (mating) ≥ 500</p>	
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> <p>Temperature Range -55°C to +155°C Thermal Shock MIL-STD-202, Method 107, Condition B Moisture Resistance MIL-STD-202, Method 206 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant</p>	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.