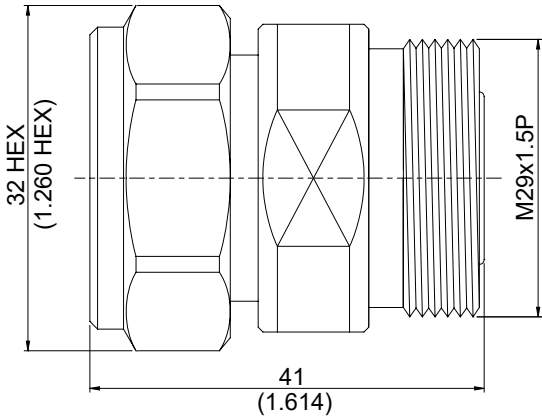


AD-DI3DI8/LP	Low PIM 7/16 plug to 7/16 jack 7.5GHz VSWR 1.15	50Ω
 <p>Intermodulation≥-165dBC</p>		
Parts	Material	Plating (Micro-inch)
Gasket	Silicone	
Retainer Ring	Stainless Steel	Passivated
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Weight:		

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-DI3DI8/LP	Low PIM 7/16 plug to 7/16 jack 7.5GHz VSWR 1.15																
<table border="0"> <tr> <td data-bbox="113 342 531 394">Interface</td> <td></td> </tr> <tr> <td data-bbox="113 394 531 535">Standard</td> <td data-bbox="531 394 1481 535">IEC60169-4</td> </tr> </table>		Interface		Standard	IEC60169-4												
Interface																	
Standard	IEC60169-4																
<table border="0"> <tr> <td data-bbox="113 557 531 609">Electrical Data</td> <td></td> </tr> <tr> <td data-bbox="113 609 531 660">Impedance</td> <td data-bbox="531 609 1481 660">50Ω</td> </tr> <tr> <td data-bbox="113 660 531 712">Frequency Range</td> <td data-bbox="531 660 1481 712">DC to 7.5GHz</td> </tr> <tr> <td data-bbox="113 712 531 763">VSWR</td> <td data-bbox="531 712 1481 763">≤ 1.15 (DC To 7.5GHz)</td> </tr> <tr> <td data-bbox="113 763 531 815">Insertion Loss</td> <td data-bbox="531 763 1481 815">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="113 815 531 866">Insulation Resistance</td> <td data-bbox="531 815 1481 866">≥ 10000MΩ</td> </tr> <tr> <td data-bbox="113 866 531 918">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 866 1481 918">4000 V rms</td> </tr> <tr> <td data-bbox="113 918 531 969">Working Voltage (at sea level)</td> <td data-bbox="531 918 1481 969">2700 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 7.5GHz	VSWR	≤ 1.15 (DC To 7.5GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 10000MΩ	Dielectric Withstanding Voltage (at sea level)	4000 V rms	Working Voltage (at sea level)	2700 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC to 7.5GHz																
VSWR	≤ 1.15 (DC To 7.5GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 10000MΩ																
Dielectric Withstanding Voltage (at sea level)	4000 V rms																
Working Voltage (at sea level)	2700 V rms																
<table border="0"> <tr> <td data-bbox="113 1055 531 1106">Mechanical Data</td> <td></td> </tr> <tr> <td data-bbox="113 1106 531 1158">Recommended Coupling Nut Torque</td> <td data-bbox="531 1106 1481 1158">260 in-lbs</td> </tr> <tr> <td data-bbox="113 1158 531 1209">Coupling Proof Torque</td> <td data-bbox="531 1158 1481 1209">310 in-lbs</td> </tr> <tr> <td data-bbox="113 1209 531 1261">Coupling Nut Retention Force</td> <td data-bbox="531 1209 1481 1261">≥ 221 lbs</td> </tr> <tr> <td data-bbox="113 1261 531 1312">Contact Captivation-axial</td> <td data-bbox="531 1261 1481 1312">≥ 45 lbs</td> </tr> <tr> <td data-bbox="113 1312 531 1364">Durability (mating)</td> <td data-bbox="531 1312 1481 1364">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	260 in-lbs	Coupling Proof Torque	310 in-lbs	Coupling Nut Retention Force	≥ 221 lbs	Contact Captivation-axial	≥ 45 lbs	Durability (mating)	≥ 500				
Mechanical Data																	
Recommended Coupling Nut Torque	260 in-lbs																
Coupling Proof Torque	310 in-lbs																
Coupling Nut Retention Force	≥ 221 lbs																
Contact Captivation-axial	≥ 45 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td data-bbox="113 1453 531 1505">Environmental Data</td> <td></td> </tr> <tr> <td data-bbox="113 1505 531 1556">Temperature Range</td> <td data-bbox="531 1505 1481 1556">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1556 531 1608">Thermal Shock</td> <td data-bbox="531 1556 1481 1608">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1608 531 1659">Moisture Resistance</td> <td data-bbox="531 1608 1481 1659">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1659 531 1711">Corrosion</td> <td data-bbox="531 1659 1481 1711">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1711 531 1762">RoHS</td> <td data-bbox="531 1711 1481 1762">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-DI3DI8/LP

SoftPlot Measurement Presentation
VSWR S22

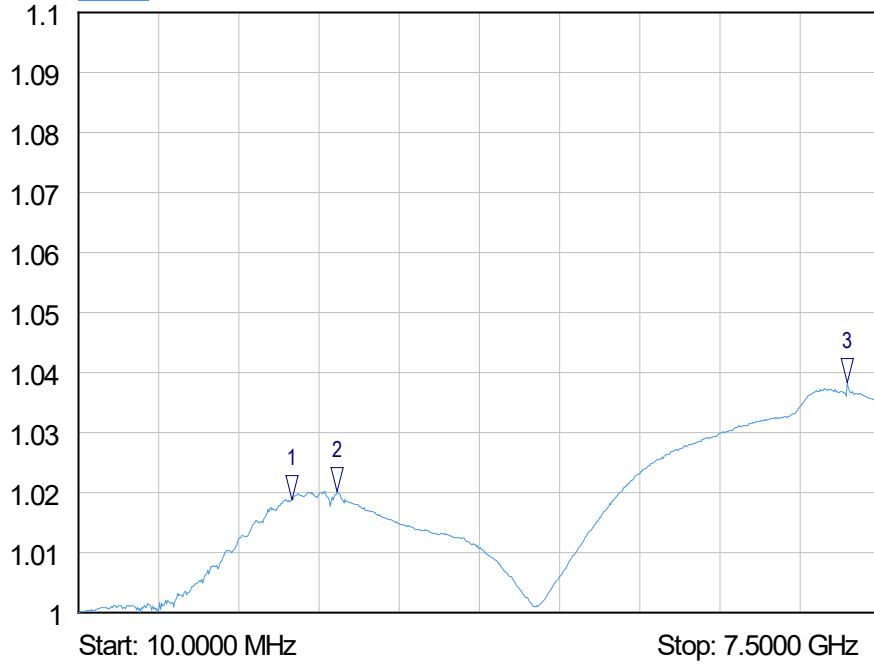

- 1 S22
▽ 2.0000 GHz
1.02 VSWR
- 2 S22
▽ 2.4300 GHz
1.02 VSWR
- 3 S22
▽ 7.1900 GHz
1.04 VSWR