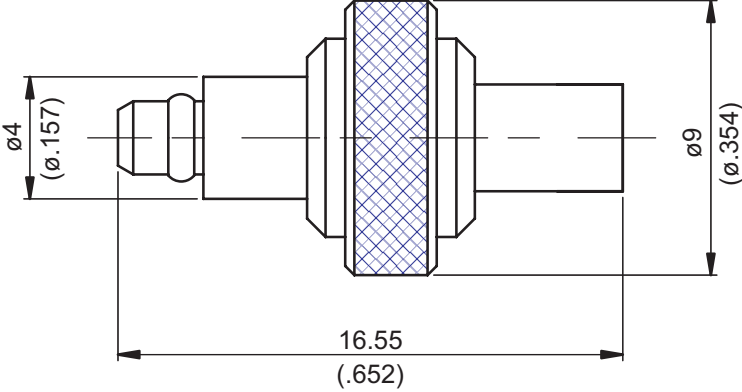


AD-E3E8	MMCX Plug To MMCX Jack 6GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Renber Ring	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Weight: 2.93 g			

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-E3E8	MMCX Plug To MMCX Jack 6GHz VSWR 1.2
Interface Standard IEC 61169-52	
Electrical Data Impedance 50Ω Frequency Range DC to 6GHz VSWR ≤ 1.2 (DC To 6GHz) Insertion Loss $\leq 0.06 \times \sqrt{f(\text{GHz})}$ dB Insulation Resistance $\geq 10000\text{M}\Omega$ Dielectric Withstanding Voltage (at sea level) 500 V rms Working Voltage (at sea level) 170 V rms	
Mechanical Data Engagement Force ≤ 3.4 lbs Disengagement Force 1.4 to 3.4 lbs Contact Captivation-axial ≥ 2.3 lbs Durability (mating) ≥ 500	
Environmental Data Temperature Range -65°C to +165°C Thermal Shock MIL-STD-202, Method 107, Condition B Moisture Resistance MIL-STD-202, Method 206 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.