


AD-FME8FME8

FME Jack To FME Jack
1GHz VSWR 1.2, 2GHz VSWR 1.3

50Ω

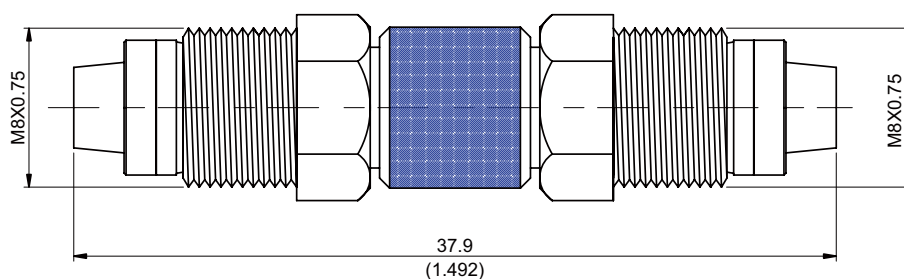

Parts	Material	Plating (Micro-inch)
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-FME8FME8	FME Jack To FME Jack 1GHz VSWR 1.2, 2GHz VSWR 1.3
Interface Standard	Jyebao FME series
Electrical Data Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 2GHz ≤ 1.2 (1GHz); ≤ 1.3 (2GHz) ≥ 5000MΩ 1000 V rms 500 V rms
Mechanical Data Recommended Coupling Nut Torque Durability (mating)	≤ 17 in-lbs ≥ 500
Environmental Data Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-55°C to +125°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.