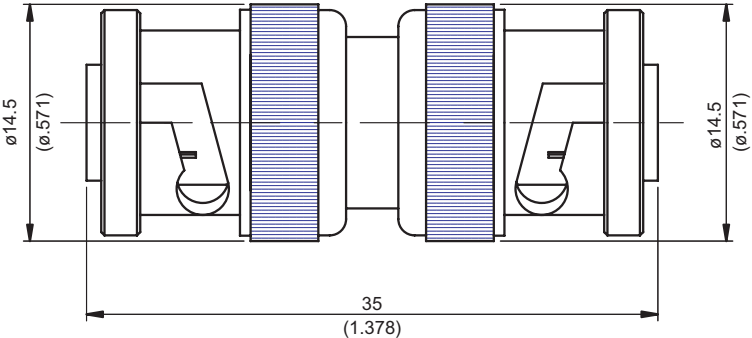


AD-H3H3	MHV Plug To MHV Plug 0.3GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Gasket	Silicon		
Spring	Sk5	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Insulator	Teflon		
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 19.15 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-H3H3	MHV Plug To MHV Plug 0.3GHz VSWR 1.2														
<table border="0"> <tr> <td data-bbox="113 322 531 394"> <div style="border: 1px solid black; padding: 2px;">Interface</div> </td> <td data-bbox="531 322 1482 394"></td> </tr> <tr> <td data-bbox="113 394 531 539">Standard</td> <td data-bbox="531 394 1482 539">MIL-STD-348B</td> </tr> </table>		<div style="border: 1px solid black; padding: 2px;">Interface</div>		Standard	MIL-STD-348B										
<div style="border: 1px solid black; padding: 2px;">Interface</div>															
Standard	MIL-STD-348B														
<table border="0"> <tr> <td data-bbox="113 539 531 611"> <div style="border: 1px solid black; padding: 2px;">Electrical Data</div> </td> <td data-bbox="531 539 1482 611"></td> </tr> <tr> <td data-bbox="113 611 531 656">Impedance</td> <td data-bbox="531 611 1482 656">50Ω</td> </tr> <tr> <td data-bbox="113 656 531 701">Frequency Range</td> <td data-bbox="531 656 1482 701">DC to 0.3GHz</td> </tr> <tr> <td data-bbox="113 701 531 745">VSWR</td> <td data-bbox="531 701 1482 745">≤ 1.2 (DC To 0.3GHz)</td> </tr> <tr> <td data-bbox="113 745 531 790">Insulation Resistance</td> <td data-bbox="531 745 1482 790">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="113 790 531 835">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 790 1482 835">5000 V rms</td> </tr> <tr> <td data-bbox="113 835 531 880">Working Voltage (at sea level)</td> <td data-bbox="531 835 1482 880">1600 V rms</td> </tr> </table>		<div style="border: 1px solid black; padding: 2px;">Electrical Data</div>		Impedance	50Ω	Frequency Range	DC to 0.3GHz	VSWR	≤ 1.2 (DC To 0.3GHz)	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	5000 V rms	Working Voltage (at sea level)	1600 V rms
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div>															
Impedance	50Ω														
Frequency Range	DC to 0.3GHz														
VSWR	≤ 1.2 (DC To 0.3GHz)														
Insulation Resistance	≥ 5000MΩ														
Dielectric Withstanding Voltage (at sea level)	5000 V rms														
Working Voltage (at sea level)	1600 V rms														
<table border="0"> <tr> <td data-bbox="113 987 531 1059"> <div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> </td> <td data-bbox="531 987 1482 1059"></td> </tr> <tr> <td data-bbox="113 1059 531 1104">Recommended Coupling Nut Torque</td> <td data-bbox="531 1059 1482 1104">0.6 to 2.5 in-lbs</td> </tr> <tr> <td data-bbox="113 1104 531 1149">Coupling Nut Retention Force</td> <td data-bbox="531 1104 1482 1149">≥ 101.2 lbs</td> </tr> <tr> <td data-bbox="113 1149 531 1193">Contact Captivation-axial</td> <td data-bbox="531 1149 1482 1193">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="113 1193 531 1238">Durability (mating)</td> <td data-bbox="531 1193 1482 1238">≥ 500</td> </tr> </table>		<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div>		Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs	Coupling Nut Retention Force	≥ 101.2 lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500				
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div>															
Recommended Coupling Nut Torque	0.6 to 2.5 in-lbs														
Coupling Nut Retention Force	≥ 101.2 lbs														
Contact Captivation-axial	≥ 6.1 lbs														
Durability (mating)	≥ 500														
<table border="0"> <tr> <td data-bbox="113 1339 531 1411"> <div style="border: 1px solid black; padding: 2px;">Environmental Data</div> </td> <td data-bbox="531 1339 1482 1411"></td> </tr> <tr> <td data-bbox="113 1411 531 1456">Temperature Range</td> <td data-bbox="531 1411 1482 1456">-65°C to +165°C</td> </tr> <tr> <td data-bbox="113 1456 531 1500">Thermal Shock</td> <td data-bbox="531 1456 1482 1500">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1500 531 1545">Moisture Resistance</td> <td data-bbox="531 1500 1482 1545">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1545 531 1590">Corrosion</td> <td data-bbox="531 1545 1482 1590">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1590 531 1635">RoHS</td> <td data-bbox="531 1590 1482 1635">Compliant</td> </tr> </table>		<div style="border: 1px solid black; padding: 2px;">Environmental Data</div>		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant		
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div>															
Temperature Range	-65°C to +165°C														
Thermal Shock	MIL-STD-202, Method 107, Condition B														
Moisture Resistance	MIL-STD-202, Method 206														
Corrosion	MIL-STD-202, Method 101, Condition B														
RoHS	Compliant														

Notice: JYEBAO reserves the right to make modifications deemed appropriate.