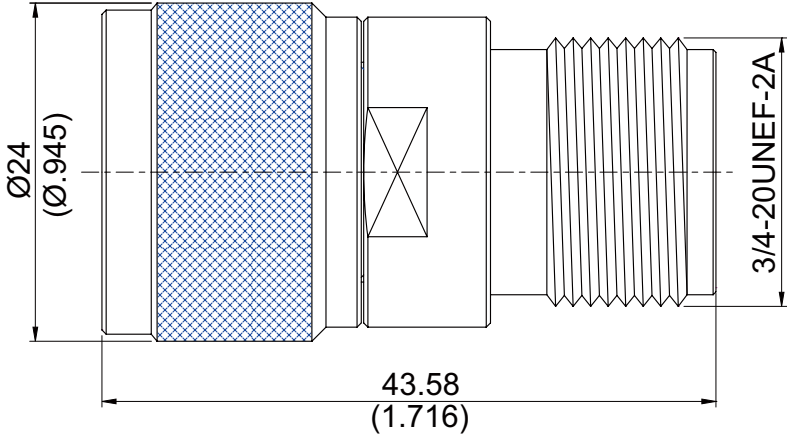


AD-HN3HN8	HN Plug To HN Jack 4GHz VSWR 1.2	50Ω																					
																							
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating (Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Gasket</td><td>Silicon</td><td></td></tr> <tr> <td>Contact Pin</td><td>Beryllium Copper</td><td>Silver 150 Over Copper 50</td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Contact Pin</td><td>Brass</td><td>Silver 150 Over Copper 50</td></tr> <tr> <td>Body</td><td>Brass</td><td>Nickel 100 Over Copper 50 Over Copper 50</td></tr> <tr> <td>Coupling Nut</td><td>Brass</td><td>Nickel 100 Over Copper 50 Over Copper 50</td></tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Gasket	Silicon		Contact Pin	Beryllium Copper	Silver 150 Over Copper 50	Insulator	Teflon		Contact Pin	Brass	Silver 150 Over Copper 50	Body	Brass	Nickel 100 Over Copper 50 Over Copper 50	Coupling Nut	Brass	Nickel 100 Over Copper 50 Over Copper 50
Parts	Material	Plating (Micro-inch)																					
Gasket	Silicon																						
Contact Pin	Beryllium Copper	Silver 150 Over Copper 50																					
Insulator	Teflon																						
Contact Pin	Brass	Silver 150 Over Copper 50																					
Body	Brass	Nickel 100 Over Copper 50 Over Copper 50																					
Coupling Nut	Brass	Nickel 100 Over Copper 50 Over Copper 50																					
Weight:																							

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-HN3HN8	HN Plug To HN Jack 4GHz VSWR 1.2
<div>Interface</div> Standard	MIL-STD-348B
<div>Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 4GHz ≤ 1.2 (DC To 4GHz) ≥ 5000MΩ 3500 V rms 2500 V rms
<div>Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Durability (mating)	6.2 to 9.7 in-lbs 15 in-lbs ≥ 500
<div>Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.