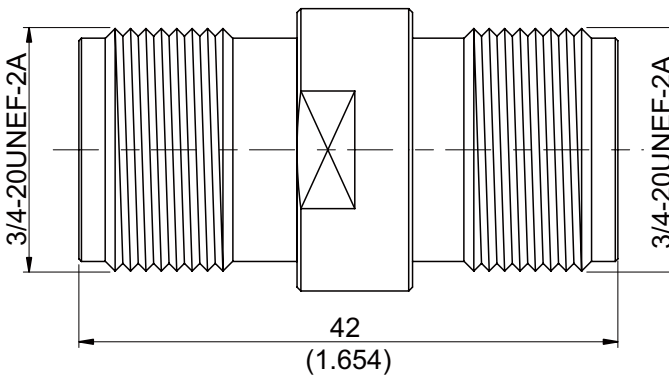


AD-HN8HN8	HN Jack To HN Jack 4GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Beryllium Copper	Silver Plating 150 Over Copper 50	
Insulator	Teflon		
Body	Brass	Nickel 100 Over Copper 50	
Weight: 12.8 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-HN8HN8	HN Jack To HN Jack 4GHz VSWR 1.2														
<table border="0"> <tr> <td data-bbox="129 342 531 394"><b>Interface</b></td> <td></td> </tr> <tr> <td data-bbox="129 394 531 533">Standard</td> <td data-bbox="531 394 1482 533">MIL-STD-348B</td> </tr> </table>		<b>Interface</b>		Standard	MIL-STD-348B										
<b>Interface</b>															
Standard	MIL-STD-348B														
<table border="0"> <tr> <td data-bbox="129 555 531 607"><b>Electrical Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 607 531 658">Impedance</td> <td data-bbox="531 607 1482 658">50Ω</td> </tr> <tr> <td data-bbox="129 658 531 710">Frequency Range</td> <td data-bbox="531 658 1482 710">DC to 4GHz</td> </tr> <tr> <td data-bbox="129 710 531 761">VSWR</td> <td data-bbox="531 710 1482 761">≤ 1.2 (DC To 4GHz)</td> </tr> <tr> <td data-bbox="129 761 531 813">Insulation Resistance</td> <td data-bbox="531 761 1482 813">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 813 531 864">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 813 1482 864">3500 V rms</td> </tr> <tr> <td data-bbox="129 864 531 916">Working Voltage (at sea level)</td> <td data-bbox="531 864 1482 916">2500 V rms</td> </tr> </table>		<b>Electrical Data</b>		Impedance	50Ω	Frequency Range	DC to 4GHz	VSWR	≤ 1.2 (DC To 4GHz)	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	3500 V rms	Working Voltage (at sea level)	2500 V rms
<b>Electrical Data</b>															
Impedance	50Ω														
Frequency Range	DC to 4GHz														
VSWR	≤ 1.2 (DC To 4GHz)														
Insulation Resistance	≥ 5000MΩ														
Dielectric Withstanding Voltage (at sea level)	3500 V rms														
Working Voltage (at sea level)	2500 V rms														
<table border="0"> <tr> <td data-bbox="129 1052 531 1104"><b>Mechanical Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 1104 531 1155">Recommended Coupling Nut Torque</td> <td data-bbox="531 1104 1482 1155">6.2 to 9.7 in-lbs</td> </tr> <tr> <td data-bbox="129 1155 531 1207">Coupling Proof Torque</td> <td data-bbox="531 1155 1482 1207">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1207 531 1258">Durability (mating)</td> <td data-bbox="531 1207 1482 1258">≥ 500</td> </tr> </table>		<b>Mechanical Data</b>		Recommended Coupling Nut Torque	6.2 to 9.7 in-lbs	Coupling Proof Torque	15 in-lbs	Durability (mating)	≥ 500						
<b>Mechanical Data</b>															
Recommended Coupling Nut Torque	6.2 to 9.7 in-lbs														
Coupling Proof Torque	15 in-lbs														
Durability (mating)	≥ 500														
<table border="0"> <tr> <td data-bbox="129 1357 531 1408"><b>Environmental Data</b></td> <td></td> </tr> <tr> <td data-bbox="129 1408 531 1460">Temperature Range</td> <td data-bbox="531 1408 1482 1460">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1460 531 1512">Thermal Shock</td> <td data-bbox="531 1460 1482 1512">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1512 531 1563">Moisture Resistance</td> <td data-bbox="531 1512 1482 1563">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1563 531 1615">Corrosion</td> <td data-bbox="531 1563 1482 1615">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1615 531 1666">RoHS</td> <td data-bbox="531 1615 1482 1666">Compliant</td> </tr> </table>		<b>Environmental Data</b>		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant		
<b>Environmental Data</b>															
Temperature Range	-65°C to +165°C														
Thermal Shock	MIL-STD-202, Method 107, Condition B														
Moisture Resistance	MIL-STD-202, Method 206														
Corrosion	MIL-STD-202, Method 101, Condition B														
RoHS	Compliant														

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-HN8HN8

