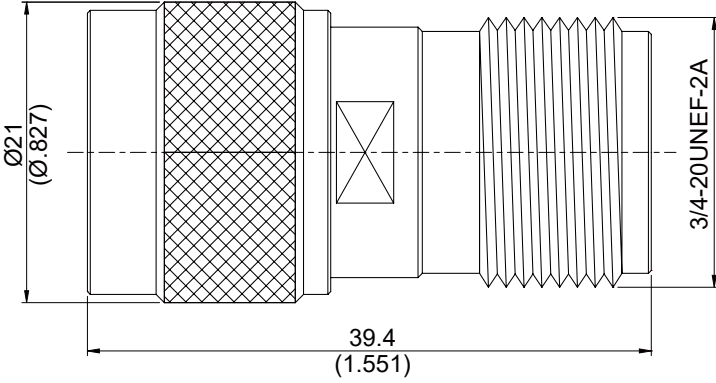


AD-N3HN8	N Plug To HN Jack 4GHz VSWR 1.2	50Ω																								
																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Retainer Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																								
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Gasket	Silicon																									
Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Insulator	Teflon																									
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Weight:																										

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3HN8	N Plug To HN Jack 4GHz VSWR 1.2																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: center;">N</th> <th style="width: 50%; text-align: center;">HN</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">MIL-STD-348B</td> </tr> </tbody> </table>	N	HN	MIL-STD-348B	MIL-STD-348B															
N	HN																			
MIL-STD-348B	MIL-STD-348B																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">50Ω</td> </tr> <tr> <td></td> <td style="text-align: center;">DC To 4GHz</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 1.2 (DC To 4GHz)</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td></td> <td style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td></td> <td style="text-align: center;">2500 V rms</td> </tr> <tr> <td></td> <td style="text-align: center;">1000 V rms</td> </tr> </tbody> </table>			50Ω		DC To 4GHz		≤ 1.2 (DC To 4GHz)		≤ 0.04 x √f(GHz) dB		≥ 5000MΩ		2500 V rms		1000 V rms				
	50Ω																			
	DC To 4GHz																			
	≤ 1.2 (DC To 4GHz)																			
	≤ 0.04 x √f(GHz) dB																			
	≥ 5000MΩ																			
	2500 V rms																			
	1000 V rms																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%; text-align: center;">N</th> <th style="width: 25%; text-align: center;">HN</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">6 to 10 in-lbs</td> <td style="text-align: center;">6.2 to 9.7 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td>Coupling Nut Retention Force</td> <td style="text-align: center;">≥ 101.2 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.3 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>			N	HN	Recommended Coupling Nut Torque	6 to 10 in-lbs	6.2 to 9.7 in-lbs	Coupling Proof Torque	15 in-lbs	15 in-lbs	Coupling Nut Retention Force	≥ 101.2 lbs	NA	Contact Captivation-axial	≥ 6.3 lbs	NA	Durability (mating)	≥ 500	≥ 500
	N	HN																		
Recommended Coupling Nut Torque	6 to 10 in-lbs	6.2 to 9.7 in-lbs																		
Coupling Proof Torque	15 in-lbs	15 in-lbs																		
Coupling Nut Retention Force	≥ 101.2 lbs	NA																		
Contact Captivation-axial	≥ 6.3 lbs	NA																		
Durability (mating)	≥ 500	≥ 500																		
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">-65°C to +165°C</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">Compliant</td> </tr> </tbody> </table>			-65°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant								
	-65°C to +165°C																			
	MIL-STD-202, Method 107, Condition B																			
	MIL-STD-202, Method 206																			
	MIL-STD-202, Method 101, Condition B																			
	Compliant																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.