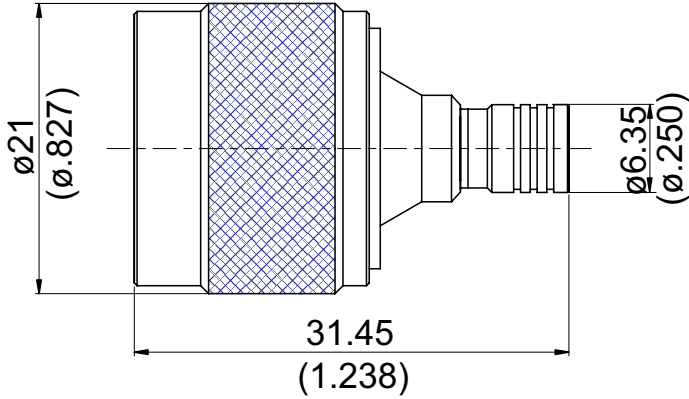


AD-N3S3	N Plug To SMB Plug 4GHz VSWR 1.2	50Ω
		
Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Renber Ring(N)	Beryllium Copper	Tin-Zinc-Copper-Alloy 200 Over Copper 50
Renber Ring(SMB)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicon	
Contact Body(N)	Brass	Tin-Zinc-Copper-Alloy 200 Over Copper 50
Insulator	Teflon	
Body(N)	Brass	Tin-Zinc-Copper-Alloy 200 Over Copper 50
Body(SMB)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Coupling Nut(N)	Brass	Tin-Zinc-Copper-Alloy 200 Over Copper 50
Weight: 29.77 g		

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3S3	N Plug To SMB Plug 4GHz VSWR 1.2	
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> Standard Mechanically Compatible With	N	SMB
	MIL-STD-348B	MIL-STD-348B
		SMS
<div data-bbox="129 562 531 611" style="border: 1px solid black; padding: 2px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC To 4GHz ≤ 1.2 (DC To 4GHz) ≤ 0.05 x √f(GHz) dB ≥ 5000MΩ 1000 V rms 335 V rms	
<div data-bbox="129 1059 531 1108" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	N	SMB
	6 to 10 in-lbs	NA
	15 in-lbs	NA
	≥ 101.2 lbs	NA
	NA	1.8 to 14.2 lbs
	NA	1.8 to 14.2 lbs
	≥ 6.3 lbs	≥ 4 lbs
	≥ 500	≥ 500
<div data-bbox="129 1603 531 1653" style="border: 1px solid black; padding: 2px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.