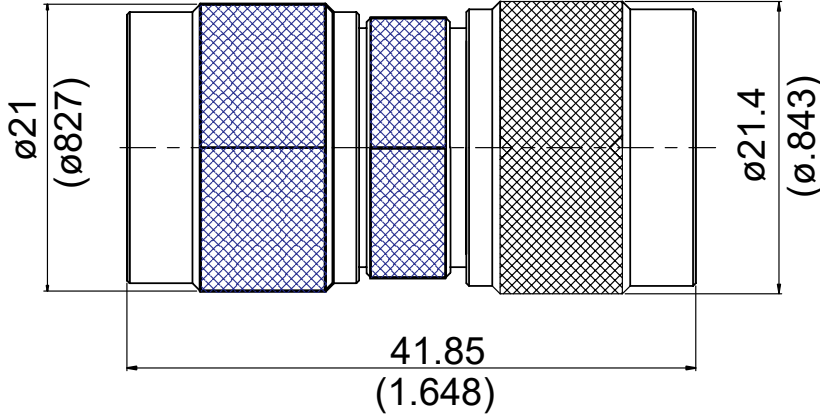


AD-N3SC3	N Plug To SC Plug 11GHz VSWR 1.25	50Ω																								
																										
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Renber Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Insulator	Teflon		Renber Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Gasket	Silicon		Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																								
Insulator	Teflon																									
Renber Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Gasket	Silicon																									
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Weight: 63.75 g																										

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3SC3	N Plug To SC Plug 11GHz VSWR 1.25	
<div style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard</p>	N	SC
	MIL-STD-348B	MIL-STD-348B
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p>Impedance</p> <p>Frequency Range</p> <p>VSWR</p> <p>Insertion Loss</p> <p>Insulation Resistance</p> <p>Dielectric Withstanding Voltage (at sea level)</p> <p>Working Voltage (at sea level)</p>	<p>50Ω</p> <p>DC To 11GHz</p> <p>≤ 1.25 (DC To 11GHz)</p> <p>≤ 0.06 x √f(GHz) dB</p> <p>≥ 5000MΩ</p> <p>2500 V rms</p> <p>1000 V rms</p>	
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p>Recommended Coupling Nut Torque</p> <p>Coupling Proof Torque</p> <p>Coupling Nut Retention Force</p> <p>Contact Captivation-axial</p> <p>Durability (mating)</p>	N	SC
	6 to 10 in-lbs	12 to 15 in-lbs
	15 in-lbs	15 in-lbs
	≥ 101.2 lbs	≥ 100 lbs
	≥ 6.3 lbs	NA
	≥ 500	≥ 500
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p>Temperature Range</p> <p>Thermal Shock</p> <p>Moisture Resistance</p> <p>Corrosion</p> <p>RoHS</p>	<p>-65°C to +165°C</p> <p>MIL-STD-202, Method 107, Condition B</p> <p>MIL-STD-202, Method 206</p> <p>MIL-STD-202, Method 101, Condition B</p> <p>Compliant</p>	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3SC3

