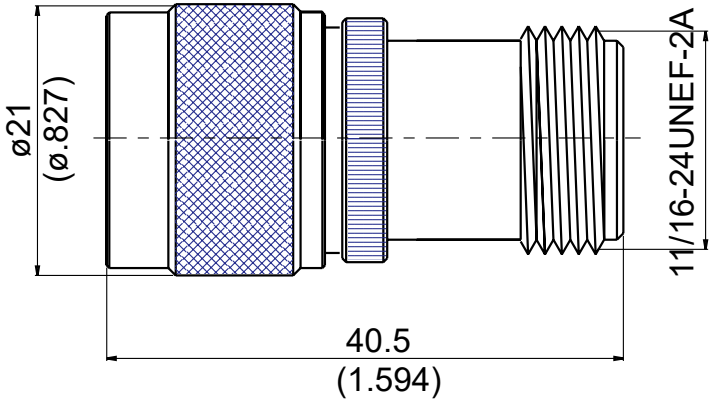


AD-N3SC8	N Plug To SC Jack 11GHz VSWR 1.25	50Ω																					
																							
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Retainer Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Insulator	Teflon		Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Gasket	Silicon		Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																					
Insulator	Teflon																						
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Gasket	Silicon																						
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
<table border="1"> <tbody> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Retainer Ring</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Gasket</td> <td>Silicon</td> <td></td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>			Insulator	Teflon		Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Gasket	Silicon		Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50			
Insulator	Teflon																						
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Gasket	Silicon																						
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
<p>Weight: 51.58 g</p>																							

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N3SC8	N Plug To SC Jack 11GHz VSWR 1.25																									
Interface	N	SC																								
Standard	MIL-STD-348B	MIL-STD-348B																								
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black;">Electrical Data</td> <td></td> <td></td> </tr> <tr> <td>Impedance</td> <td colspan="2" style="text-align: center;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2" style="text-align: center;">DC To 11GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2" style="text-align: center;">≤ 1.25 (DC To 11GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2" style="text-align: center;">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2" style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">2500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">1000 V rms</td> </tr> </table>			Electrical Data			Impedance	50Ω		Frequency Range	DC To 11GHz		VSWR	≤ 1.25 (DC To 11GHz)		Insertion Loss	≤ 0.06 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	2500 V rms		Working Voltage (at sea level)	1000 V rms	
Electrical Data																										
Impedance	50Ω																									
Frequency Range	DC To 11GHz																									
VSWR	≤ 1.25 (DC To 11GHz)																									
Insertion Loss	≤ 0.06 x √f(GHz) dB																									
Insulation Resistance	≥ 5000MΩ																									
Dielectric Withstanding Voltage (at sea level)	2500 V rms																									
Working Voltage (at sea level)	1000 V rms																									
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black;">Mechanical Data</td> <td style="text-align: center;">N</td> <td style="text-align: center;">SC</td> </tr> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">6 to 10 in-lbs</td> <td style="text-align: center;">12 to 15 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td>Coupling Nut Retention Force</td> <td style="text-align: center;">≥ 101.2 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.3 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </table>			Mechanical Data	N	SC	Recommended Coupling Nut Torque	6 to 10 in-lbs	12 to 15 in-lbs	Coupling Proof Torque	15 in-lbs	15 in-lbs	Coupling Nut Retention Force	≥ 101.2 lbs	NA	Contact Captivation-axial	≥ 6.3 lbs	NA	Durability (mating)	≥ 500	≥ 500						
Mechanical Data	N	SC																								
Recommended Coupling Nut Torque	6 to 10 in-lbs	12 to 15 in-lbs																								
Coupling Proof Torque	15 in-lbs	15 in-lbs																								
Coupling Nut Retention Force	≥ 101.2 lbs	NA																								
Contact Captivation-axial	≥ 6.3 lbs	NA																								
Durability (mating)	≥ 500	≥ 500																								
<table border="0" style="width: 100%;"> <tr> <td style="border: 1px solid black;">Environmental Data</td> <td></td> <td></td> </tr> <tr> <td>Temperature Range</td> <td colspan="2" style="text-align: center;">-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2" style="text-align: center;">Compliant</td> </tr> </table>			Environmental Data			Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Environmental Data																										
Temperature Range	-65°C to +165°C																									
Thermal Shock	MIL-STD-202, Method 107, Condition B																									
Moisture Resistance	MIL-STD-202, Method 206																									
Corrosion	MIL-STD-202, Method 101, Condition B																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.