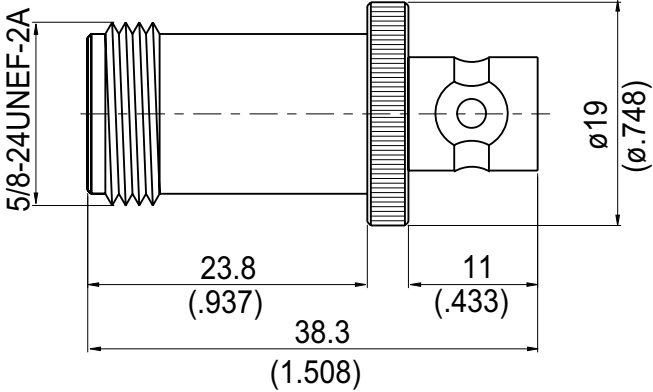


AD-N8B8	N Jack To BNC Jack 11GHz VSWR 1.25	50Ω												
														
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50												
<table border="1"> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>			Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50			
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50												
<p>Weight: 31.87 g</p>														


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8B8	N Jack To BNC Jack 11GHz VSWR 1.25	
Interface	N	BNC
Standard	MIL-STD-348B	MIL-STD-348B
Electrical Data		
Impedance	50Ω	
Frequency Range	DC To 11GHz	
VSWR	≤ 1.25 (DC To 11GHz)	
Insertion Loss	≤ 0.06 x √f(GHz) dB	
Insulation Resistance	≥ 5000MΩ	
Dielectric Withstanding Voltage (at sea level)	1500 V rms	
Working Voltage (at sea level)	500 V rms	
Mechanical Data		
	N	BNC
Recommended Coupling Nut Torque	6 to 10 in-lbs	0.6 to 2.5 in-lbs
Coupling Proof Torque	15 in-lbs	NA
Contact Captivation-axial	≥ 6.3 lbs	≥ 6.1 lbs
Durability (mating)	≥ 500	≥ 500
Environmental Data		
Temperature Range	-65°C to +165°C	
Thermal Shock	MIL-STD-202, Method 107, Condition B	
Moisture Resistance	MIL-STD-202, Method 206	
Corrosion	MIL-STD-202, Method 101, Condition B	
RoHS	Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8B8

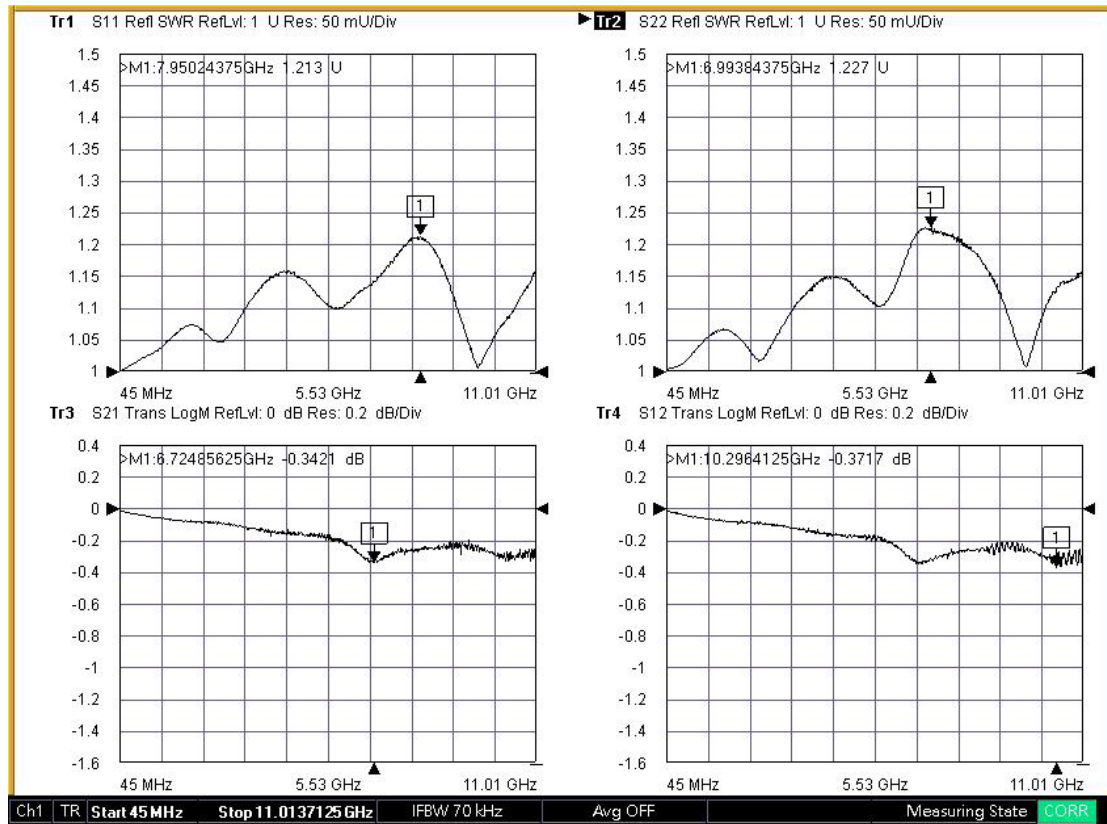

Note: S11/S12/S21/S22 plots shown represent IL and VSWR of two adaptors tested. To extract IL of a single adaptor divide IL measured by two.