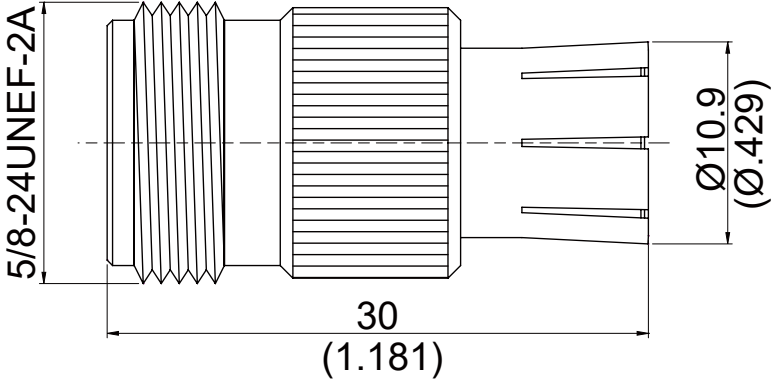


AD-N8CQ3	N Jack To C Snap On Plug 2GHz VSWR 1.2	50Ω												
														
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50												
<p>Weight:</p>														

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8CQ3	N Jack To C Snap On Plug 2GHz VSWR 1.2																									
Interface	N Jack Screw Side	C Plug Snap On Side																								
Standard	MIL-STD-348B	Per JYEBAO C Snap On Plug																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black;">Electrical Data</td> <td colspan="2"></td> </tr> <tr> <td>Impedance</td> <td colspan="2" style="text-align: center;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2" style="text-align: center;">DC To 2GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2" style="text-align: center;">≤ 1.2 (DC To 2GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2" style="text-align: center;">≤ 0.06 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2" style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">2500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">1000 V rms</td> </tr> </table>			Electrical Data			Impedance	50Ω		Frequency Range	DC To 2GHz		VSWR	≤ 1.2 (DC To 2GHz)		Insertion Loss	≤ 0.06 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	2500 V rms		Working Voltage (at sea level)	1000 V rms	
Electrical Data																										
Impedance	50Ω																									
Frequency Range	DC To 2GHz																									
VSWR	≤ 1.2 (DC To 2GHz)																									
Insertion Loss	≤ 0.06 x √f(GHz) dB																									
Insulation Resistance	≥ 5000MΩ																									
Dielectric Withstanding Voltage (at sea level)	2500 V rms																									
Working Voltage (at sea level)	1000 V rms																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black;">Mechanical Data</td> <td colspan="2"></td> </tr> <tr> <td></td> <td style="text-align: center;">N</td> <td style="text-align: center;">C</td> </tr> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">6 to 10 in-lbs</td> <td style="text-align: center;">NA (Snap On)</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">NA (Snap On)</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.3 lbs</td> <td style="text-align: center;">≥ 6 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </table>			Mechanical Data				N	C	Recommended Coupling Nut Torque	6 to 10 in-lbs	NA (Snap On)	Coupling Proof Torque	15 in-lbs	NA (Snap On)	Contact Captivation-axial	≥ 6.3 lbs	≥ 6 lbs	Durability (mating)	≥ 500	≥ 500						
Mechanical Data																										
	N	C																								
Recommended Coupling Nut Torque	6 to 10 in-lbs	NA (Snap On)																								
Coupling Proof Torque	15 in-lbs	NA (Snap On)																								
Contact Captivation-axial	≥ 6.3 lbs	≥ 6 lbs																								
Durability (mating)	≥ 500	≥ 500																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black;">Environmental Data</td> <td colspan="2"></td> </tr> <tr> <td>Temperature Range</td> <td colspan="2" style="text-align: center;">-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2" style="text-align: center;">Compliant</td> </tr> </table>			Environmental Data			Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant							
Environmental Data																										
Temperature Range	-65°C to +165°C																									
Thermal Shock	MIL-STD-202, Method 107, Condition B																									
Moisture Resistance	MIL-STD-202, Method 206																									
Corrosion	MIL-STD-202, Method 101, Condition B																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.