


AD-N8F3	N Jack To F Plug 6GHz VSWR 1.2	75Ω
---------	-----------------------------------	-----

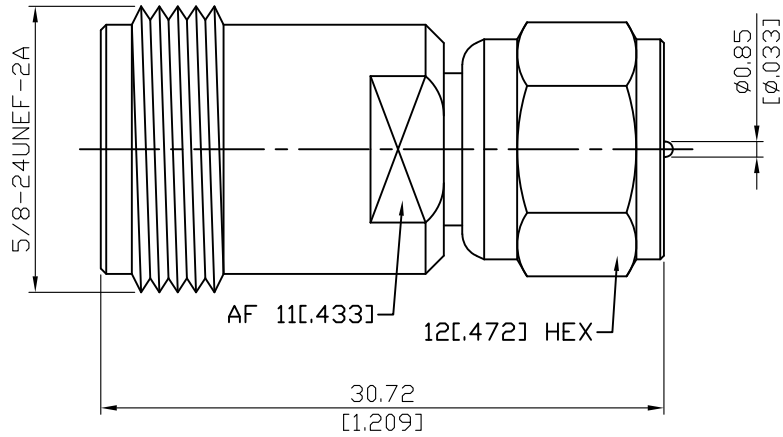

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 22.96 g	
-----------------	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8F3	N Jack To F Plug 6GHz VSWR 1.2											
Interface Standard	<table border="1"> <thead> <tr> <th data-bbox="782 344 1123 394">N</th> <th data-bbox="1123 344 1482 394">F</th> </tr> </thead> <tbody> <tr> <td data-bbox="782 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1482 443">IEC 61169-24</td> </tr> </tbody> </table>	N	F	MIL-STD-348B	IEC 61169-24							
N	F											
MIL-STD-348B	IEC 61169-24											
Electrical Data Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table> <tbody> <tr> <td>75Ω</td> </tr> <tr> <td>DC To 6GHz</td> </tr> <tr> <td>≤ 1.2 (DC To 6GHz)</td> </tr> <tr> <td>≥ 5000MΩ</td> </tr> <tr> <td>1500 V rms</td> </tr> <tr> <td>500 V rms</td> </tr> </tbody> </table>		75Ω	DC To 6GHz	≤ 1.2 (DC To 6GHz)	≥ 5000MΩ	1500 V rms	500 V rms				
75Ω												
DC To 6GHz												
≤ 1.2 (DC To 6GHz)												
≥ 5000MΩ												
1500 V rms												
500 V rms												
Mechanical Data Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1"> <thead> <tr> <th data-bbox="782 1066 1123 1115">N</th> <th data-bbox="1123 1066 1482 1115">F</th> </tr> </thead> <tbody> <tr> <td data-bbox="782 1115 1123 1164">6 to 10 in-lbs</td> <td data-bbox="1123 1115 1482 1164">15 to 20 in-lbs</td> </tr> <tr> <td data-bbox="782 1164 1123 1214">15 in-lbs</td> <td data-bbox="1123 1164 1482 1214">60 in-lbs</td> </tr> <tr> <td data-bbox="782 1214 1123 1263">≥ 6.3 lbs</td> <td data-bbox="1123 1214 1482 1263">NA</td> </tr> <tr> <td data-bbox="782 1263 1123 1312">≥ 500</td> <td data-bbox="1123 1263 1482 1312">≥ 500</td> </tr> </tbody> </table>		N	F	6 to 10 in-lbs	15 to 20 in-lbs	15 in-lbs	60 in-lbs	≥ 6.3 lbs	NA	≥ 500	≥ 500
N	F											
6 to 10 in-lbs	15 to 20 in-lbs											
15 in-lbs	60 in-lbs											
≥ 6.3 lbs	NA											
≥ 500	≥ 500											
Environmental Data Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table> <tbody> <tr> <td>-65°C to +165°C</td> </tr> <tr> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>Compliant</td> </tr> </tbody> </table>		-65°C to +165°C	MIL-STD-202, Method 107, Condition B	MIL-STD-202, Method 206	MIL-STD-202, Method 101, Condition B	Compliant					
-65°C to +165°C												
MIL-STD-202, Method 107, Condition B												
MIL-STD-202, Method 206												
MIL-STD-202, Method 101, Condition B												
Compliant												

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8F3

