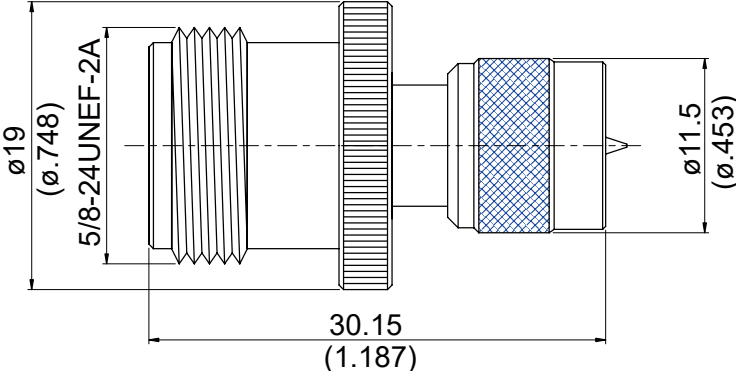


AD-N8MU3	N Jack To Mini UHF Plug 2.5GHz VSWR 1.2		50Ω																		
																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 25%;">Parts</th> <th style="width: 25%;">Material</th> <th style="width: 50%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Coupling Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Contact Pin(Mini UHF)</td> <td>Brass</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Contact Pin(N)</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>				Parts	Material	Plating (Micro-inch)	Insulator	Teflon		Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Contact Pin(Mini UHF)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin(N)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)																			
Insulator	Teflon																				
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																			
Contact Pin(Mini UHF)	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																			
Contact Pin(N)	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																			
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																			
<p>Weight: 23.97 g</p>																					

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8MU3	N Jack To Mini UHF Plug 2.5GHz VSWR 1.2	
<div style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard</p>	N MIL-STD-348B	Mini UHF Jyebao Mini UHF
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p>Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)</p>	<p>50Ω DC To 2.5GHz ≤ 1.2 (DC To 2.5GHz) ≤ 0.06 x √f(GHz) dB ≥ 5000MΩ 1000 V rms 335 V rms</p>	
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p>Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)</p>	N	Mini UHF
	6 to 10 in-lbs	NA
	15 in-lbs	NA
	≥ 6.3 lbs	≥ 4.5 lbs
	≥ 500	≥ 500
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p>Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS</p>	<p>-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant</p>	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.