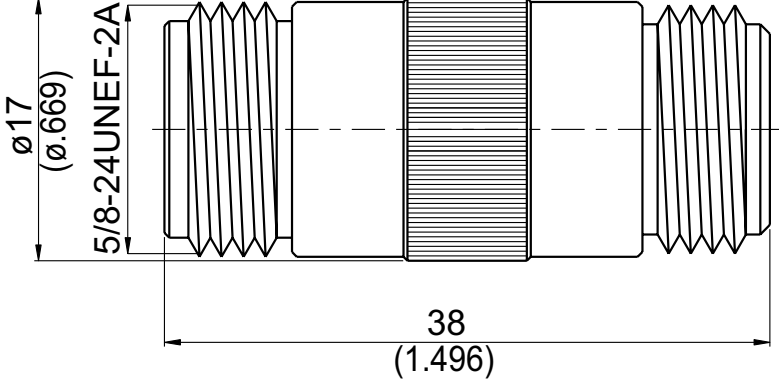


AD-N8N8	N Jack To N Jack 11GHz VSWR 1.2	50Ω
		
Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PTFE	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Weight: 45.42 g		

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-N8N8	N Jack To N Jack 11GHz VSWR 1.2
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="129 400 264 434">Standard</p>	<p data-bbox="794 400 1011 434">MIL-STD-348B</p>
<div data-bbox="129 560 531 609" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p data-bbox="129 611 293 645">Impedance</p> <p data-bbox="129 658 389 692">Frequency Range</p> <p data-bbox="129 705 229 739">VSWR</p> <p data-bbox="129 752 333 786">Insertion Loss</p> <p data-bbox="129 799 438 833">Insulation Resistance</p> <p data-bbox="129 846 772 880">Dielectric Withstanding Voltage (at sea level)</p> <p data-bbox="129 893 563 927">Working Voltage (at sea level)</p>	<p data-bbox="794 611 858 645">50Ω</p> <p data-bbox="794 658 991 692">DC to 11GHz</p> <p data-bbox="794 705 1107 739">≤ 1.2 (DC To 11GHz)</p> <p data-bbox="794 752 1086 786">≤ 0.05 x √f(GHz) dB</p> <p data-bbox="794 799 954 833">≥ 5000MΩ</p> <p data-bbox="794 846 963 880">2500 V rms</p> <p data-bbox="794 893 963 927">1000 V rms</p>
<div data-bbox="129 1057 531 1106" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p data-bbox="129 1108 657 1142">Recommended Coupling Nut Torque</p> <p data-bbox="129 1155 459 1189">Coupling Proof Torque</p> <p data-bbox="129 1202 493 1236">Contact Captivation-axial</p> <p data-bbox="129 1249 395 1283">Durability (mating)</p>	<p data-bbox="794 1108 983 1142">6 to 10 in-lbs</p> <p data-bbox="794 1155 919 1189">15 in-lbs</p> <p data-bbox="794 1202 927 1236">≥ 6.3 lbs</p> <p data-bbox="794 1249 884 1283">≥ 500</p>
<div data-bbox="129 1456 531 1505" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p data-bbox="129 1507 421 1541">Temperature Range</p> <p data-bbox="129 1554 352 1588">Thermal Shock</p> <p data-bbox="129 1601 424 1635">Moisture Resistance</p> <p data-bbox="129 1648 272 1682">Corrosion</p> <p data-bbox="129 1695 220 1729">RoHS</p>	<p data-bbox="794 1507 1034 1541">-65°C to +165°C</p> <p data-bbox="794 1554 1362 1588">MIL-STD-202, Method 107, Condition B</p> <p data-bbox="794 1601 1177 1635">MIL-STD-202, Method 206</p> <p data-bbox="794 1648 1362 1682">MIL-STD-202, Method 101, Condition B</p> <p data-bbox="794 1695 943 1729">Compliant</p>

Notice: JYEBAO reserves the right to make modifications deemed appropriate.