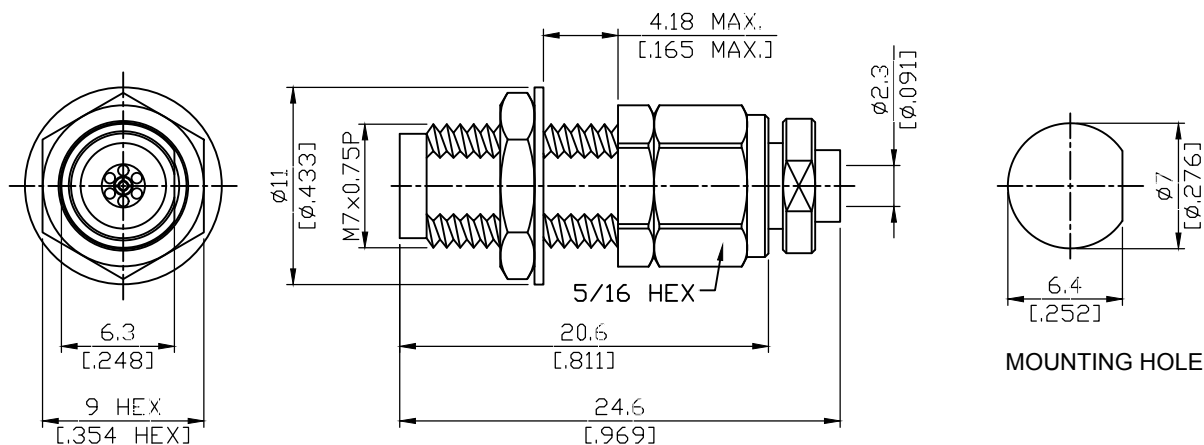


2.4-8305-0085

2.4mm Jack Solder Bulkhead For
RG405

50Ω



Parts	Material	Plating (Micro-inch)
Hex Nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated
Nut	Stainless Steel	Passivated
Gasket	Silicone	
Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PEI 1000	
Body	Stainless Steel	Passivated




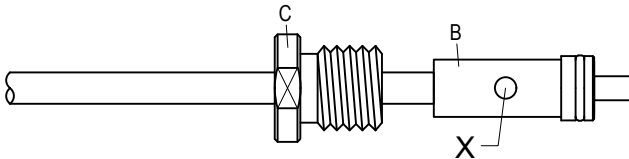
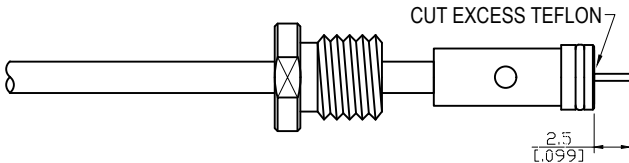

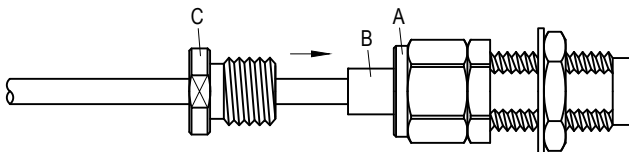
Suitable Cables: .085 Semi-Rigid, .085 Formable, RG405

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications demand appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

2.4-8305-0085		DATE	2016/07/20	REV	—
A		B	C		
					
BODY + WASHER + HEX NUT		FERRULE + GASKET	NUT		
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE NUT " C " AND FERRULE " B " OVER CABLE. Step 3: SOLDER IN " X ".			
		Step 4: CUT AWAY ANY EXCESS TEFLON STICKING OUT OF THE SOLDER FERRULE. Step 5: STRIP AS SHOWN.			
		Step 6: SHARPEN CENTER CONDUCTOR TIP.			
		Step 7: SLIDE CABLE INTO CONNECTOR BODY " A ". Step 8: FINALLY SCREW " C " ON THE CONNECTOR BODY " A ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	