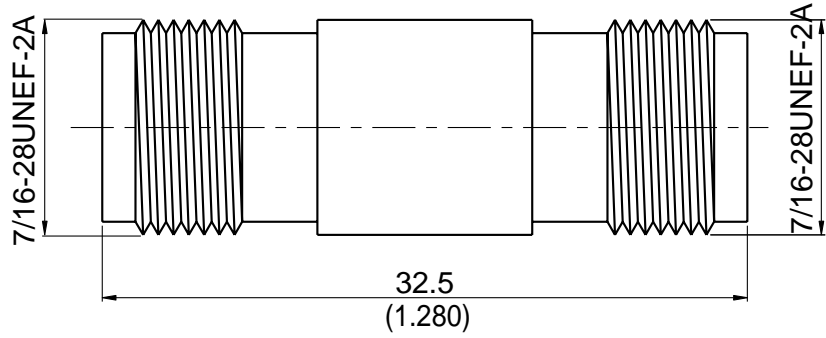


AD-T8T8-75	<b>TNC Jack To TNC Jack</b> <b>3GHz VSWR 1.2</b>	<b>75Ω</b>												
														
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;">Parts</th> <th style="width: 20%;">Material</th> <th style="width: 60%;">Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>			Parts	Material	Plating (Micro-inch)	Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Parts	Material	Plating (Micro-inch)												
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20												
Insulator	Teflon													
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50												
Weight: 11.06 g														

This part number complies with RoHS.

**Notice:** JYEBAO reserves the right to make modifications deemed appropriate.

AD-T8T8-75	TNC Jack To TNC Jack 3GHz VSWR 1.2
<b>Interface</b> Standard MIL-STD-348B	
<b>Electrical Data</b> Impedance 75Ω Frequency Range DC to 3GHz VSWR $\leq 1.2$ (DC To 3GHz) Insertion Loss $\leq 0.05 \times \sqrt{f(\text{GHz})}$ dB Insulation Resistance $\geq 5000\text{M}\Omega$ Dielectric Withstanding Voltage (at sea level) 1000 V rms Working Voltage (at sea level) 500 V rms	
<b>Mechanical Data</b> Recommended Coupling Nut Torque 4.1 to 6.1 in-lbs Coupling Proof Torque 15 in-lbs Contact Captivation-axial $\geq 6.1$ lbs Durability (mating) $\geq 500$	
<b>Environmental Data</b> Temperature Range -65°C to +165°C Thermal Shock MIL-STD-202, Method 107, Condition B Moisture Resistance MIL-STD-202, Method 206 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.