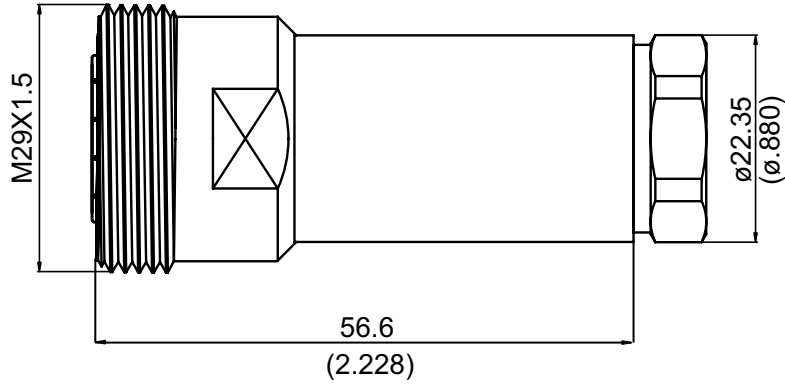


7/16-8200B-1/2A

7/16 Jack Clamp

50Ω



NOTE: (1) FOR 1/2 " FOAM DIELECTRIC CABLE.
(2) LOW INTERMODULATION DESIGN.

Parts	Material	Plating(Micro-inch)
Gasket	Silicon	
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Silver 150 Over Copper 50
Insulator	Teflon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 144.84 g

Suitable Cables: LDF4-50A; RF1/2"BHF

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

7/16-8200B-1/2A

JYE BAO CO., LTD.

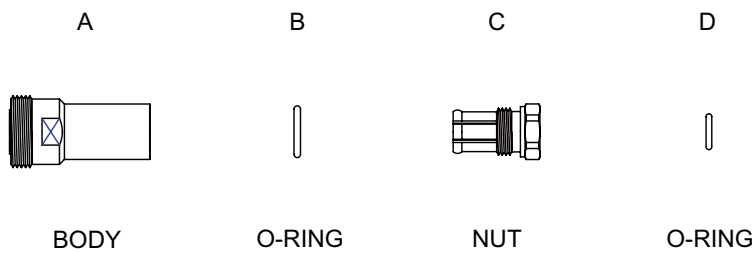

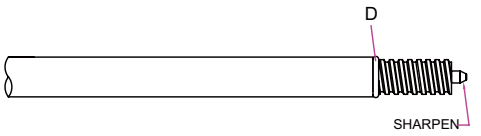


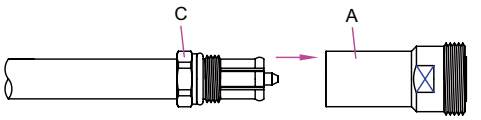


DIAGRAM	ASSEMBLY INSTRUCTION
	Step 1: STRIP AS SHOWN .
	Step 2: PUT VASELINE ON " D " AND SLIDE O-RING " D " OVER CABLE . Step 3: SHARPEN CENTER CONDUCTOR TIP.
	Step 4: SLIDE NUT " C " OVER CABLE .
	Step 5: PUT VASELINE ON " B " AND SLIDE O-RING " B " OVER THE NUT " C " .
	Step 6: FINALLY SCREW " C " ON THE CONNECTOR BODY " A " .

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.