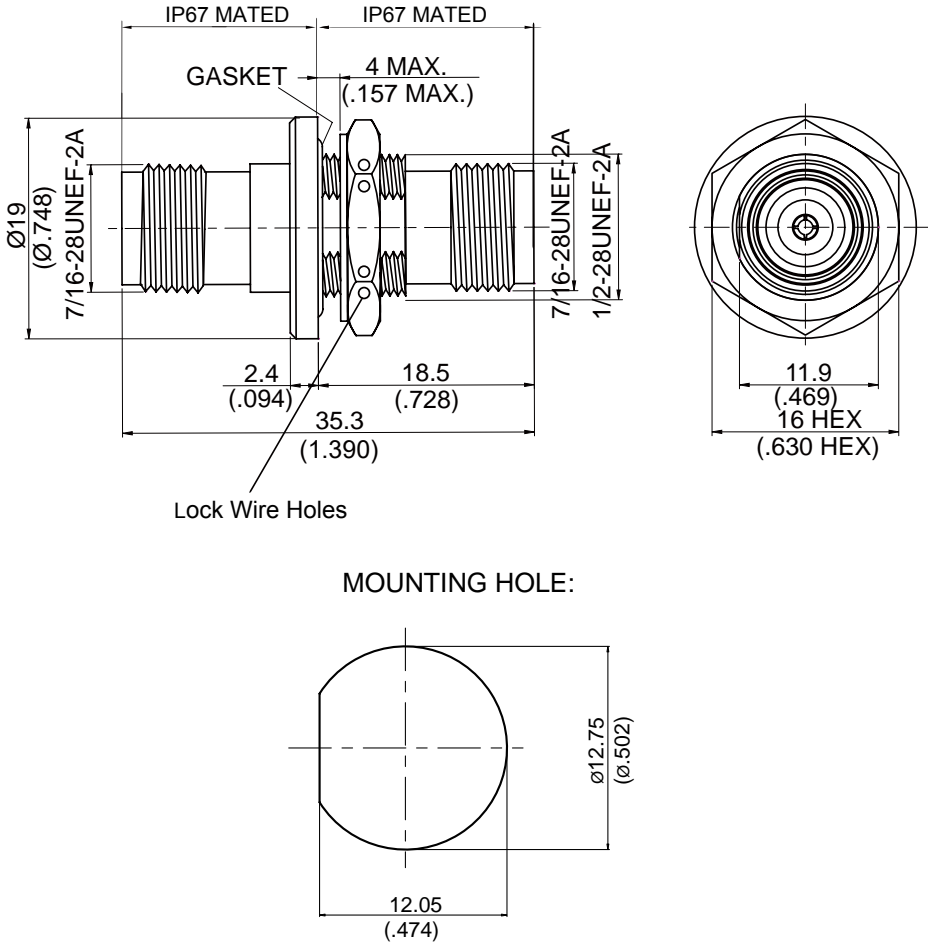


AD-T8T8-BF-18	TNC Jack to TNC Jack Bulkhead IP67 Mated, 18GHz VSWR 1.35	50Ω																					
																							
<table border="1"> <thead> <tr> <th>Parts</th> <th>Material</th> <th>Plating (Micro-inch)</th> </tr> </thead> <tbody> <tr> <td>Hex Nut</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Washer</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> <tr> <td>Gasket</td> <td>Silicone</td> <td></td> </tr> <tr> <td>Contact Pin</td> <td>Beryllium Copper</td> <td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td> </tr> <tr> <td>Insulator</td> <td>Teflon</td> <td></td> </tr> <tr> <td>Body</td> <td>Brass</td> <td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td> </tr> </tbody> </table>	Parts	Material	Plating (Micro-inch)	Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicone		Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Insulator	Teflon		Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																					
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					
Gasket	Silicone																						
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																					
Insulator	Teflon																						
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																					

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-T8T8-BF-18	TNC Jack to TNC Jack Bulkhead IP67 Mated; 18GHz VSWR 1.35																
<table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 342 531 394" style="border: 1px solid black;">Interface</td> </tr> <tr> <td data-bbox="129 394 794 535">Standard</td> <td data-bbox="794 394 1482 535" style="text-align: center;">MIL-STD-348B</td> </tr> </table>		Interface		Standard	MIL-STD-348B												
Interface																	
Standard	MIL-STD-348B																
<table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 557 531 609" style="border: 1px solid black;">Electrical Data</td> </tr> <tr> <td data-bbox="129 609 794 660">Impedance</td> <td data-bbox="794 609 1482 660" style="text-align: center;">50Ω</td> </tr> <tr> <td data-bbox="129 660 794 712">Frequency Range</td> <td data-bbox="794 660 1482 712" style="text-align: center;">DC to 18GHz</td> </tr> <tr> <td data-bbox="129 712 794 763">VSWR</td> <td data-bbox="794 712 1482 763" style="text-align: center;">≤ 1.35 (DC To 18GHz)</td> </tr> <tr> <td data-bbox="129 763 794 815">Insertion Loss</td> <td data-bbox="794 763 1482 815" style="text-align: center;">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 815 794 866">Insulation Resistance</td> <td data-bbox="794 815 1482 866" style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 866 794 918">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 866 1482 918" style="text-align: center;">1000 V rms</td> </tr> <tr> <td data-bbox="129 918 794 969">Working Voltage (at sea level)</td> <td data-bbox="794 918 1482 969" style="text-align: center;">500 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 18GHz	VSWR	≤ 1.35 (DC To 18GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1000 V rms	Working Voltage (at sea level)	500 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC to 18GHz																
VSWR	≤ 1.35 (DC To 18GHz)																
Insertion Loss	≤ 0.05 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1000 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 1055 531 1106" style="border: 1px solid black;">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1106 794 1158">Recommended Coupling Nut Torque</td> <td data-bbox="794 1106 1482 1158" style="text-align: center;">4.1 to 6.1 in-lbs</td> </tr> <tr> <td data-bbox="129 1158 794 1209">Coupling Proof Torque</td> <td data-bbox="794 1158 1482 1209" style="text-align: center;">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1209 794 1261">Contact Captivation-axial</td> <td data-bbox="794 1209 1482 1261" style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1261 794 1312">Durability (mating)</td> <td data-bbox="794 1261 1482 1312" style="text-align: center;">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	4.1 to 6.1 in-lbs	Coupling Proof Torque	15 in-lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500						
Mechanical Data																	
Recommended Coupling Nut Torque	4.1 to 6.1 in-lbs																
Coupling Proof Torque	15 in-lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 500																
<table border="0" style="width: 100%;"> <tr> <td colspan="2" data-bbox="129 1453 531 1505" style="border: 1px solid black;">Environmental Data</td> </tr> <tr> <td data-bbox="129 1505 794 1556">Temperature Range</td> <td data-bbox="794 1505 1482 1556" style="text-align: center;">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1556 794 1608">Thermal Shock</td> <td data-bbox="794 1556 1482 1608" style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1608 794 1659">Moisture Resistance</td> <td data-bbox="794 1608 1482 1659" style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1659 794 1711">Corrosion</td> <td data-bbox="794 1659 1482 1711" style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1711 794 1762">RoHS</td> <td data-bbox="794 1711 1482 1762" style="text-align: center;">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																