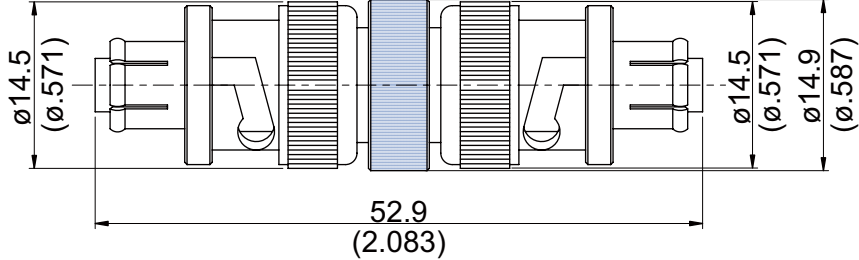


AD-V3V3	SHV Plug To SHV Plug 0.3GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Insulator	Teflon		
Gasket	Silicon		
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 26.59 g			

This part number complies with RoHS.

Notice: JYBAO reserves the right to make modifications deemed appropriate.

AD-V3V3	SHV Plug To SHV Plug 0.3GHz VSWR 1.2
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard	MIL-STD-348B
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 0.3GHz ≤ 1.2 (DC To 0.3GHz) ≥ 5000MΩ 5000 V rms 3500 V rms
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	0.6 to 2.5 in-lbs ≥ 101.2 lbs ≥ 6.1 lbs ≥ 500
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-V3V3

