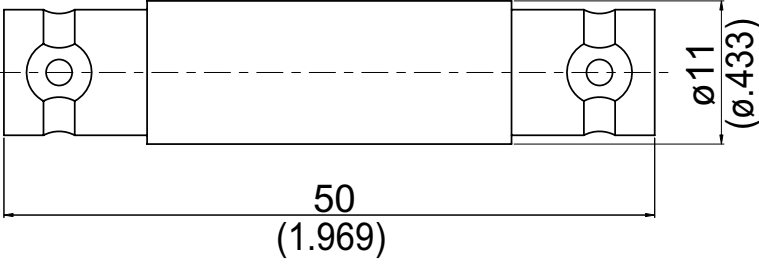


AD-V8V8	SHV Jack To SHV Jack 0.3GHz VSWR 1.2		50Ω
 <p>Technical drawing showing dimensions: Length = 50 (1.969), Diameter = <math>\phi 11</math> (<math>\phi 0.433</math>).</p>			
Parts	Material	Plating (Micro-inch)	
Lock Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Weight: 18.68 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

AD-V8V8	SHV Jack To SHV Jack 0.3GHz VSWR 1.2
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard	MIL-STD-348B
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 0.3GHz ≤ 1.2 (DC To 0.3GHz) ≥ 5000MΩ 5000 V rms 3500 V rms
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Contact Captivation-axial Durability (mating)	0.6 to 2.5 in-lbs ≥ 6.1 lbs ≥ 500
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# AD-V8V8

