


ADS-1.8/3-1.8/8-1.25

1.85mm Plug To 1.85mm Jack  
67GHz VSWR 1.25

50Ω

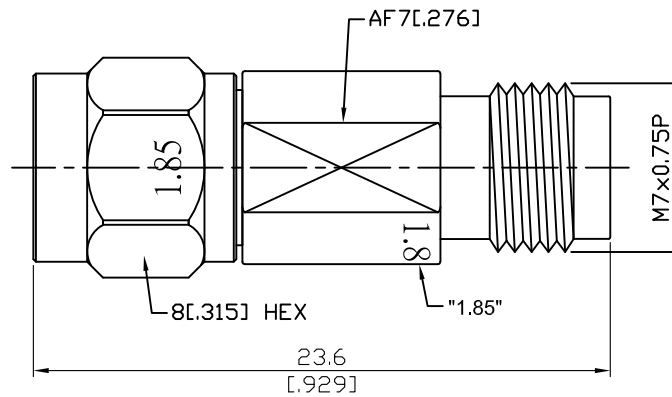

Parts	Material	Plating ( Micro-inch )
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.


ADS-1.8/3-1.8/8-1.25	1.85mm Plug To 1.85mm Jack 67GHz VSWR 1.25																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 394"><b>Interface</b></td> </tr> <tr> <td data-bbox="129 400 794 439">Standard</td> <td data-bbox="794 400 1481 439">IEEE287; IEC61169-32</td> </tr> <tr> <td data-bbox="129 448 794 486">Mechanically compatible with</td> <td data-bbox="794 448 1481 486">2.4</td> </tr> </table>		<b>Interface</b>		Standard	IEEE287; IEC61169-32	Mechanically compatible with	2.4												
<b>Interface</b>																			
Standard	IEEE287; IEC61169-32																		
Mechanically compatible with	2.4																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 602 531 654"><b>Electrical Data</b></td> </tr> <tr> <td data-bbox="129 660 794 698">Impedance</td> <td data-bbox="794 660 1481 698">50Ω</td> </tr> <tr> <td data-bbox="129 707 794 745">Frequency Range</td> <td data-bbox="794 707 1481 745">DC to 67GHz</td> </tr> <tr> <td data-bbox="129 754 794 792">VSWR</td> <td data-bbox="794 754 1481 792">≤ 1.25 (DC To 67GHz)</td> </tr> <tr> <td data-bbox="129 801 794 840">Insertion Loss</td> <td data-bbox="794 801 1481 840">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 848 794 887">Insulation Resistance</td> <td data-bbox="794 848 1481 887">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 896 794 934">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 896 1481 934">500 V rms</td> </tr> <tr> <td data-bbox="129 943 794 981">Working Voltage (at sea level)</td> <td data-bbox="794 943 1481 981">150 V rms</td> </tr> <tr> <td data-bbox="129 990 794 1028">RF Leakage</td> <td data-bbox="794 990 1481 1028">≥ 100 dB to 1GHz</td> </tr> </table>		<b>Electrical Data</b>		Impedance	50Ω	Frequency Range	DC to 67GHz	VSWR	≤ 1.25 (DC To 67GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	500 V rms	Working Voltage (at sea level)	150 V rms	RF Leakage	≥ 100 dB to 1GHz
<b>Electrical Data</b>																			
Impedance	50Ω																		
Frequency Range	DC to 67GHz																		
VSWR	≤ 1.25 (DC To 67GHz)																		
Insertion Loss	≤ 0.05 x √f(GHz) dB																		
Insulation Resistance	≥ 5000MΩ																		
Dielectric Withstanding Voltage (at sea level)	500 V rms																		
Working Voltage (at sea level)	150 V rms																		
RF Leakage	≥ 100 dB to 1GHz																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1151 531 1202"><b>Mechanical Data</b></td> </tr> <tr> <td data-bbox="129 1209 794 1247">Recommended Coupling Nut Torque</td> <td data-bbox="794 1209 1481 1247">7.08 to 9.74 inch lbs</td> </tr> <tr> <td data-bbox="129 1256 794 1294">Coupling Proof Torque</td> <td data-bbox="794 1256 1481 1294">15 inch-lbs</td> </tr> <tr> <td data-bbox="129 1303 794 1341">Contact Captivation-axial</td> <td data-bbox="794 1303 1481 1341">≥ 4.5 lbs</td> </tr> <tr> <td data-bbox="129 1350 794 1388">Durability (mating)</td> <td data-bbox="794 1350 1481 1388">≥ 500</td> </tr> </table>		<b>Mechanical Data</b>		Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs	Coupling Proof Torque	15 inch-lbs	Contact Captivation-axial	≥ 4.5 lbs	Durability (mating)	≥ 500								
<b>Mechanical Data</b>																			
Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs																		
Coupling Proof Torque	15 inch-lbs																		
Contact Captivation-axial	≥ 4.5 lbs																		
Durability (mating)	≥ 500																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1503 531 1554"><b>Environmental Data</b></td> </tr> <tr> <td data-bbox="129 1561 794 1599">Temperature Range</td> <td data-bbox="794 1561 1481 1599">-55°C to +105°C</td> </tr> <tr> <td data-bbox="129 1608 794 1646">Thermal Shock</td> <td data-bbox="794 1608 1481 1646">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1655 794 1693">Moisture Resistance</td> <td data-bbox="794 1655 1481 1693">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1702 794 1740">Corrosion</td> <td data-bbox="794 1702 1481 1740">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1749 794 1787">RoHS</td> <td data-bbox="794 1749 1481 1787">Compliant</td> </tr> </table>		<b>Environmental Data</b>		Temperature Range	-55°C to +105°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant						
<b>Environmental Data</b>																			
Temperature Range	-55°C to +105°C																		
Thermal Shock	MIL-STD-202, Method 107, Condition B																		
Moisture Resistance	MIL-STD-202, Method 206																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		

# ADS-1.8/3-1.8/8-1.25


Tr1 S11 Refl SWR RefLvl: 1 U Res: 50 mU/Div

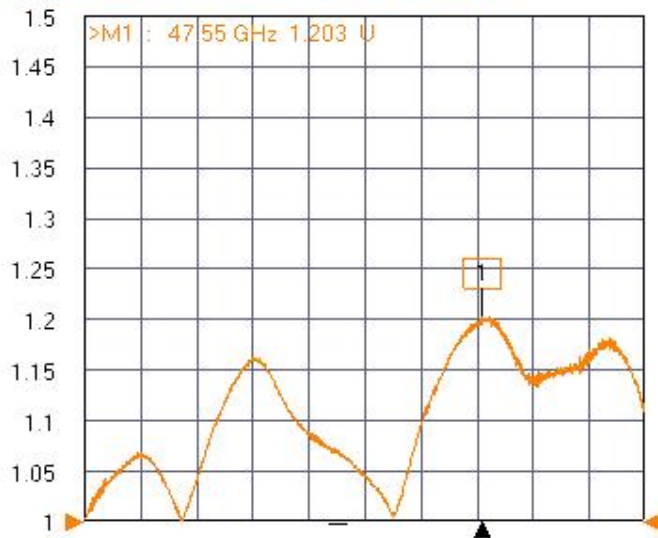

Tr2 S22 Refl SWR RefLvl: 1 U Res: 50 mU/Div

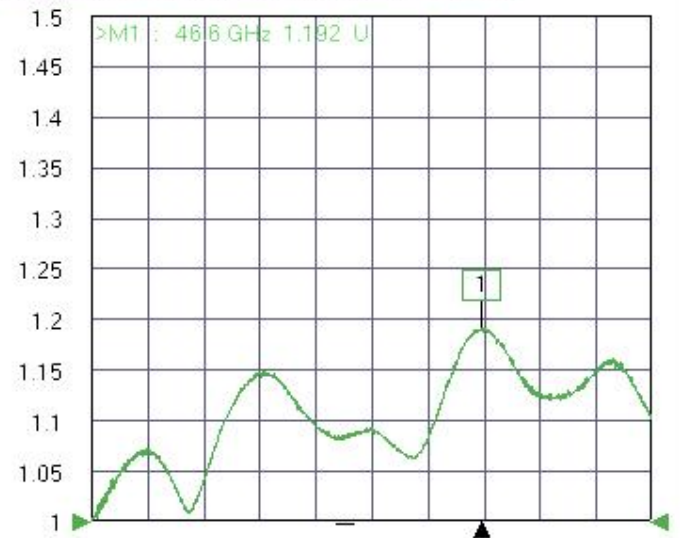

Tr3 S12 Trans LoQM RefLvl: 0 dB Res: 0.1 dB/Div

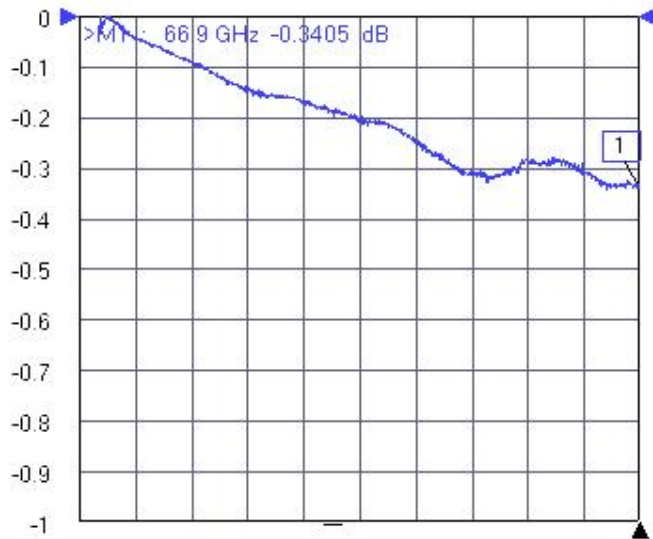

Tr4 S21 Trans LoQM RefLvl: 0 dB Res: 0.1 dB/Div

