


ADS-1.8/8-1.8/8-1.35

1.85mm Jack To 1.85mm Jack
67GHz VSWR 1.35

50Ω

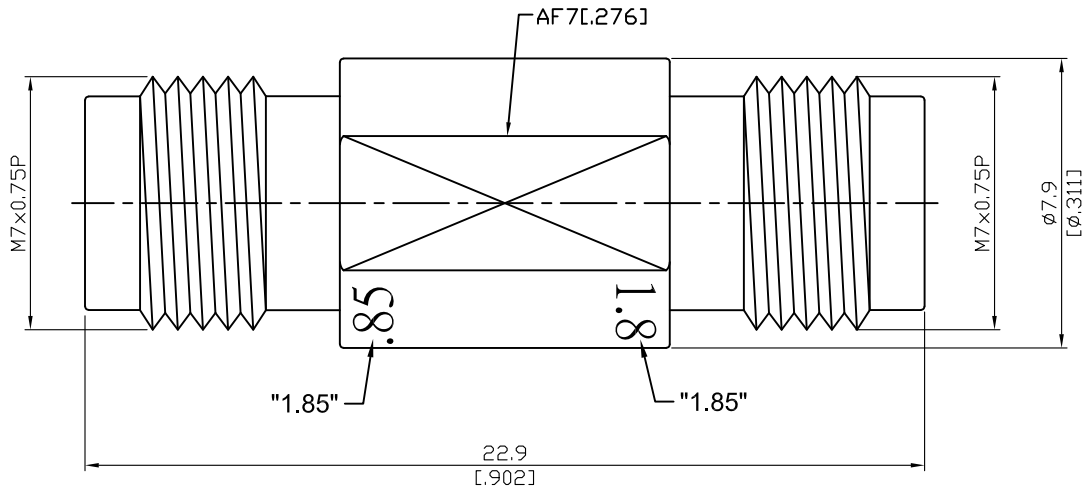

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.


ADS-1.8/8-1.8/8-1.35	1.85mm Jack To 1.85mm Jack 67GHz VSWR 1.35																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 394">Interface</td> </tr> <tr> <td data-bbox="129 400 794 436">Standard</td> <td data-bbox="794 400 1479 436">IEEE287; IEC61169-32</td> </tr> <tr> <td data-bbox="129 450 794 486">Mechanically compatible with</td> <td data-bbox="794 450 1479 486">2.4</td> </tr> </table>		Interface		Standard	IEEE287; IEC61169-32	Mechanically compatible with	2.4												
Interface																			
Standard	IEEE287; IEC61169-32																		
Mechanically compatible with	2.4																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 604 531 656">Electrical Data</td> </tr> <tr> <td data-bbox="129 663 794 698">Impedance</td> <td data-bbox="794 663 1479 698">50Ω</td> </tr> <tr> <td data-bbox="129 712 794 748">Frequency Range</td> <td data-bbox="794 712 1479 748">DC to 67GHz</td> </tr> <tr> <td data-bbox="129 761 794 797">VSWR</td> <td data-bbox="794 761 1479 797">≤ 1.35 (DC To 67GHz)</td> </tr> <tr> <td data-bbox="129 810 794 846">Insertion Loss</td> <td data-bbox="794 810 1479 846">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 860 794 896">Insulation Resistance</td> <td data-bbox="794 860 1479 896">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 909 794 945">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 909 1479 945">500 V rms</td> </tr> <tr> <td data-bbox="129 958 794 994">Working Voltage (at sea level)</td> <td data-bbox="794 958 1479 994">150 V rms</td> </tr> <tr> <td data-bbox="129 1008 794 1043">RF Leakage</td> <td data-bbox="794 1008 1479 1043">≥ 100 dB to 1GHz</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 67GHz	VSWR	≤ 1.35 (DC To 67GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	500 V rms	Working Voltage (at sea level)	150 V rms	RF Leakage	≥ 100 dB to 1GHz
Electrical Data																			
Impedance	50Ω																		
Frequency Range	DC to 67GHz																		
VSWR	≤ 1.35 (DC To 67GHz)																		
Insertion Loss	≤ 0.05 x √f(GHz) dB																		
Insulation Resistance	≥ 5000MΩ																		
Dielectric Withstanding Voltage (at sea level)	500 V rms																		
Working Voltage (at sea level)	150 V rms																		
RF Leakage	≥ 100 dB to 1GHz																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1149 531 1200">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1207 794 1243">Recommended Coupling Nut Torque</td> <td data-bbox="794 1207 1479 1243">7.08 to 9.74 inch lbs</td> </tr> <tr> <td data-bbox="129 1256 794 1292">Coupling Proof Torque</td> <td data-bbox="794 1256 1479 1292">15 inch-lbs</td> </tr> <tr> <td data-bbox="129 1305 794 1341">Contact Captivation-axial</td> <td data-bbox="794 1305 1479 1341">≥ 4.5 lbs</td> </tr> <tr> <td data-bbox="129 1355 794 1391">Durability (mating)</td> <td data-bbox="794 1355 1479 1391">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs	Coupling Proof Torque	15 inch-lbs	Contact Captivation-axial	≥ 4.5 lbs	Durability (mating)	≥ 500								
Mechanical Data																			
Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs																		
Coupling Proof Torque	15 inch-lbs																		
Contact Captivation-axial	≥ 4.5 lbs																		
Durability (mating)	≥ 500																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1503 531 1554">Environmental Data</td> </tr> <tr> <td data-bbox="129 1561 794 1597">Temperature Range</td> <td data-bbox="794 1561 1479 1597">-55°C to +105°C</td> </tr> <tr> <td data-bbox="129 1610 794 1646">Thermal Shock</td> <td data-bbox="794 1610 1479 1646">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1659 794 1695">Moisture Resistance</td> <td data-bbox="794 1659 1479 1695">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1709 794 1744">Corrosion</td> <td data-bbox="794 1709 1479 1744">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1758 794 1794">RoHS</td> <td data-bbox="794 1758 1479 1794">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-55°C to +105°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant						
Environmental Data																			
Temperature Range	-55°C to +105°C																		
Thermal Shock	MIL-STD-202, Method 107, Condition B																		
Moisture Resistance	MIL-STD-202, Method 206																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		

ADS-1.8/8-1.8/8-1.35

Tr1 S11 Refl SWR RefLvl: 1 U Res: 50 mU/Div

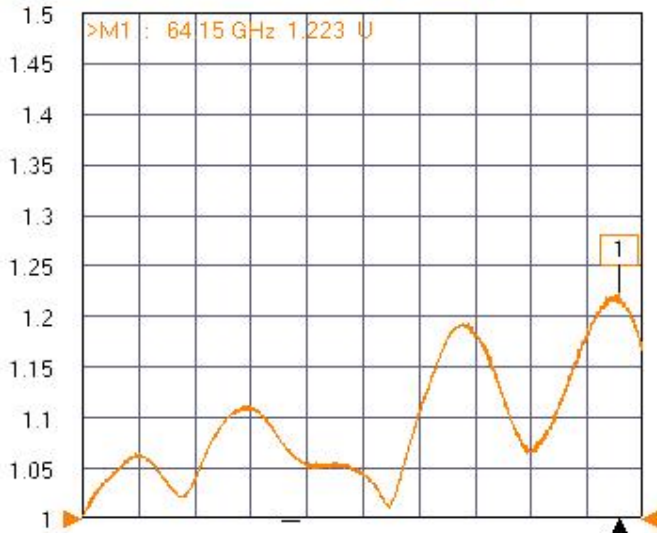

Tr2 S22 Refl SWR RefLvl: 1 U Res: 50 mU/Div

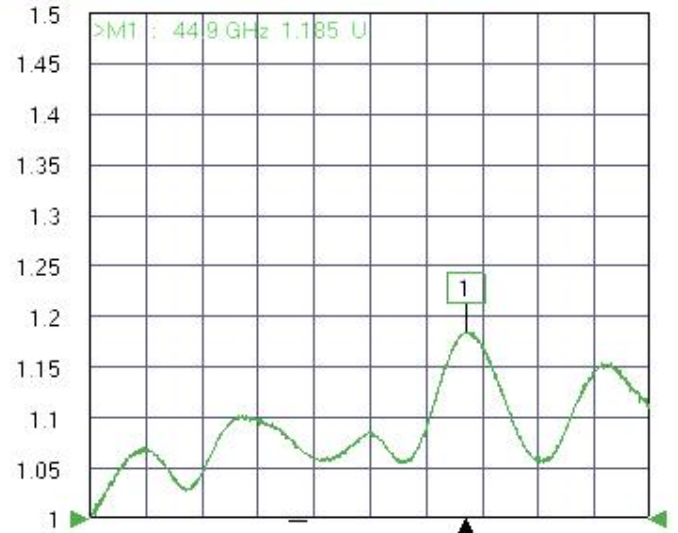

Tr3 S12 Trans LoQM RefLvl: 0 dB Res: 0.1 dB/Div



Tr4 S21 Trans LoQM RefLvl: 0 dB Res: 0.1 dB/Div

