


ADS-1.85/8-2.4/3-1.15	Stainless 1.85mm Jack To 2.4mm Plug 50GHz VSWR 1.15	50Ω
-----------------------	--	-----

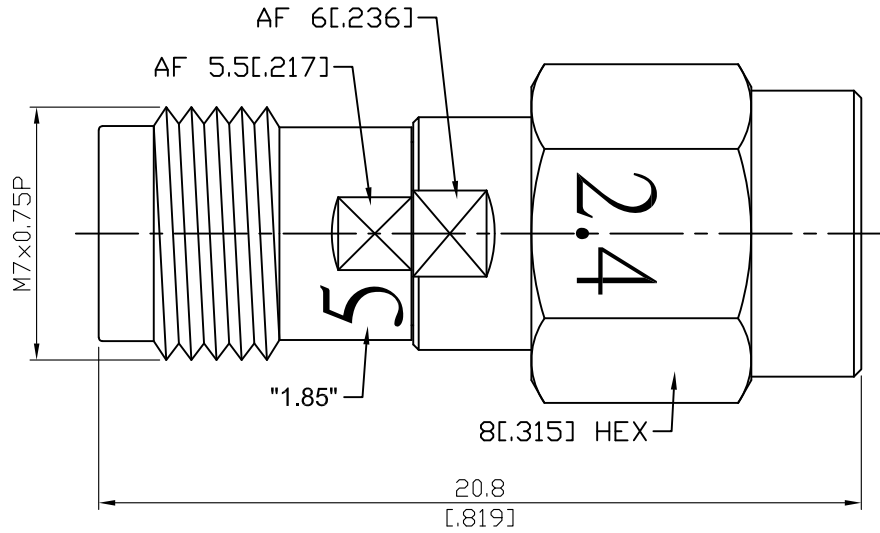

Parts	Material	Plating (Micro-inch)
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PEI	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

--	--


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.


ADS-1.85/8-2.4/3-1.15	Stainless 1.85mm Jack To 2.4mm Plug 50GHz VSWR 1.15																												
<table border="1"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td colspan="2"></td> </tr> <tr> <td data-bbox="113 392 531 481">Standard Mechanically compatible with</td> <td data-bbox="531 392 1125 481"> <table border="1"> <tr> <td data-bbox="531 392 778 436">1.85</td> <td data-bbox="778 392 1125 436">2.4</td> </tr> <tr> <td data-bbox="531 436 778 481">IEEE287; IEC61169-32</td> <td data-bbox="778 436 1125 481">MIL-STD-348B</td> </tr> </table> </td> <td data-bbox="1125 392 1479 481"></td> </tr> <tr> <td></td> <td data-bbox="531 481 778 584">2.4</td> <td data-bbox="778 481 1125 584">1.85</td> </tr> </table>			Interface			Standard Mechanically compatible with	<table border="1"> <tr> <td data-bbox="531 392 778 436">1.85</td> <td data-bbox="778 392 1125 436">2.4</td> </tr> <tr> <td data-bbox="531 436 778 481">IEEE287; IEC61169-32</td> <td data-bbox="778 436 1125 481">MIL-STD-348B</td> </tr> </table>	1.85	2.4	IEEE287; IEC61169-32	MIL-STD-348B			2.4	1.85														
Interface																													
Standard Mechanically compatible with	<table border="1"> <tr> <td data-bbox="531 392 778 436">1.85</td> <td data-bbox="778 392 1125 436">2.4</td> </tr> <tr> <td data-bbox="531 436 778 481">IEEE287; IEC61169-32</td> <td data-bbox="778 436 1125 481">MIL-STD-348B</td> </tr> </table>	1.85	2.4	IEEE287; IEC61169-32	MIL-STD-348B																								
1.85	2.4																												
IEEE287; IEC61169-32	MIL-STD-348B																												
	2.4	1.85																											
<table border="1"> <tr> <td data-bbox="113 584 531 651">Electrical Data</td> <td colspan="2"></td> </tr> <tr> <td data-bbox="113 651 531 696">Impedance</td> <td colspan="2" data-bbox="531 651 1479 696">50Ω</td> </tr> <tr> <td data-bbox="113 696 531 741">Frequency Range</td> <td colspan="2" data-bbox="531 696 1479 741">DC to 50GHz</td> </tr> <tr> <td data-bbox="113 741 531 786">VSWR</td> <td colspan="2" data-bbox="531 741 1479 786">≤ 1.15 (DC to 50GHz)</td> </tr> <tr> <td data-bbox="113 786 531 831">Insertion Loss</td> <td colspan="2" data-bbox="531 786 1479 831">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="113 831 531 875">Insulation Resistance</td> <td colspan="2" data-bbox="531 831 1479 875">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="113 875 531 920">Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" data-bbox="531 875 1479 920">500 V rms</td> </tr> <tr> <td data-bbox="113 920 531 965">Working Voltage (at sea level)</td> <td colspan="2" data-bbox="531 920 1479 965">150 V rms</td> </tr> <tr> <td data-bbox="113 965 531 1010">RF Leakage</td> <td colspan="2" data-bbox="531 965 1479 1010">≥ 100dB to 1GHz</td> </tr> </table>			Electrical Data			Impedance	50Ω		Frequency Range	DC to 50GHz		VSWR	≤ 1.15 (DC to 50GHz)		Insertion Loss	≤ 0.05 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	500 V rms		Working Voltage (at sea level)	150 V rms		RF Leakage	≥ 100dB to 1GHz	
Electrical Data																													
Impedance	50Ω																												
Frequency Range	DC to 50GHz																												
VSWR	≤ 1.15 (DC to 50GHz)																												
Insertion Loss	≤ 0.05 x √f(GHz) dB																												
Insulation Resistance	≥ 5000MΩ																												
Dielectric Withstanding Voltage (at sea level)	500 V rms																												
Working Voltage (at sea level)	150 V rms																												
RF Leakage	≥ 100dB to 1GHz																												
<table border="1"> <tr> <td data-bbox="113 1131 531 1198">Mechanical Data</td> <td colspan="2"></td> </tr> <tr> <td data-bbox="113 1198 531 1243">Recommended Coupling Nut Torque</td> <td colspan="2" data-bbox="531 1198 1479 1243">7.08 to 9.74 inch lbs</td> </tr> <tr> <td data-bbox="113 1243 531 1288">Coupling Proof Torque</td> <td colspan="2" data-bbox="531 1243 1479 1288">15 in-lbs</td> </tr> <tr> <td data-bbox="113 1288 531 1332">Contact Captivation-axial</td> <td colspan="2" data-bbox="531 1288 1479 1332">≥ 4.5 lbs</td> </tr> <tr> <td data-bbox="113 1332 531 1377">Durability (mating)</td> <td colspan="2" data-bbox="531 1332 1479 1377">≥ 500</td> </tr> </table>			Mechanical Data			Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs		Coupling Proof Torque	15 in-lbs		Contact Captivation-axial	≥ 4.5 lbs		Durability (mating)	≥ 500													
Mechanical Data																													
Recommended Coupling Nut Torque	7.08 to 9.74 inch lbs																												
Coupling Proof Torque	15 in-lbs																												
Contact Captivation-axial	≥ 4.5 lbs																												
Durability (mating)	≥ 500																												
<table border="1"> <tr> <td data-bbox="113 1480 531 1547">Environmental Data</td> <td colspan="2"></td> </tr> <tr> <td data-bbox="113 1547 531 1592">Temperature Range</td> <td colspan="2" data-bbox="531 1547 1479 1592">-40°C to +165°C</td> </tr> <tr> <td data-bbox="113 1592 531 1637">Thermal Shock</td> <td colspan="2" data-bbox="531 1592 1479 1637">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="113 1637 531 1682">Moisture Resistance</td> <td colspan="2" data-bbox="531 1637 1479 1682">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="113 1682 531 1727">Corrosion</td> <td colspan="2" data-bbox="531 1682 1479 1727">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="113 1727 531 1771">RoHS</td> <td colspan="2" data-bbox="531 1727 1479 1771">Compliant</td> </tr> </table>			Environmental Data			Temperature Range	-40°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant										
Environmental Data																													
Temperature Range	-40°C to +165°C																												
Thermal Shock	MIL-STD-202, Method 107, Condition B																												
Moisture Resistance	MIL-STD-202, Method 206																												
Corrosion	MIL-STD-202, Method 101, Condition B																												
RoHS	Compliant																												

ADS-1.85/8-2.4/3-1.15


Tr1 S11 Refl SWR RefLvl: 1 U Res: 50 mU/Div

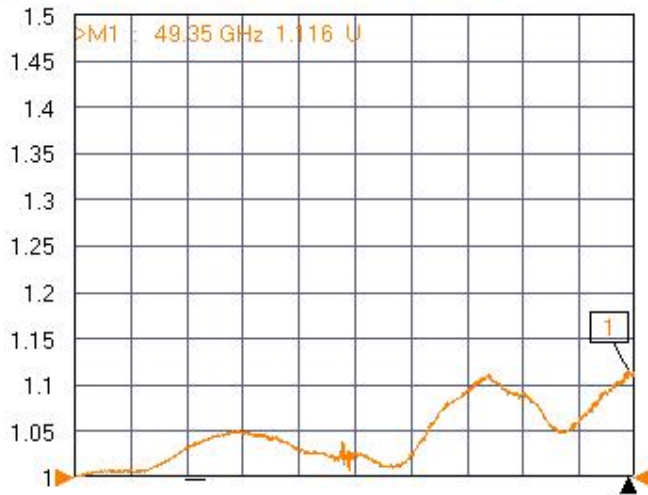

Tr2 S22 Refl SWR RefLvl: 1 U Res: 50 mU/Div

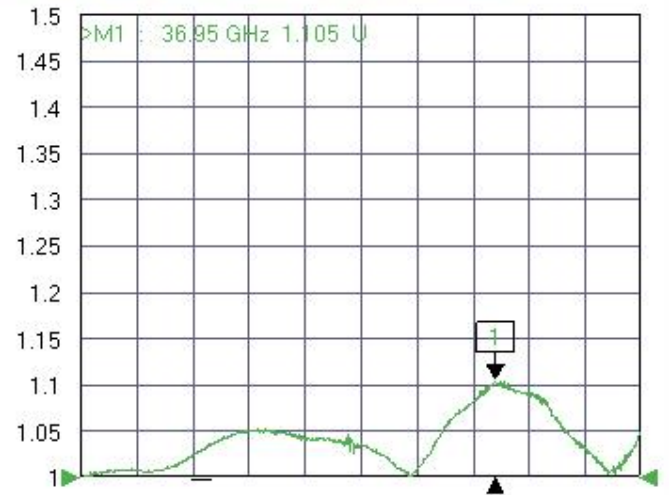

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 0.3 dB/Div

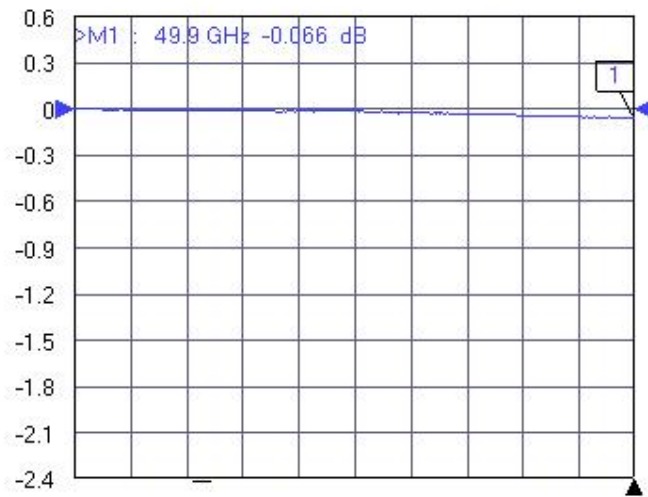

Tr4 S12 Trans LogM RefLvl: 0 dB Res: 0.3 dB/Div

