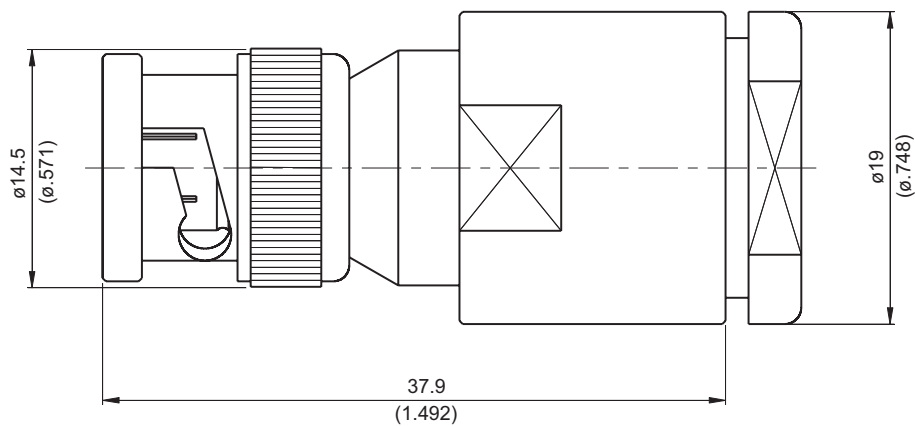


BNC3200-010C2

BNC Plug Clamp

75Ω



Parts	Material	Plating (Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Top Hat	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Center Pin	Brass	Gold 3 Over Nickel 50 Over Copper 50
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:




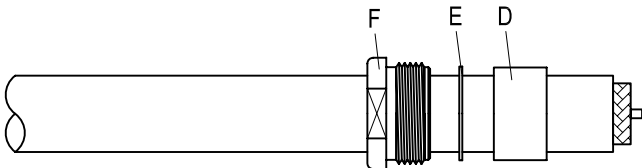
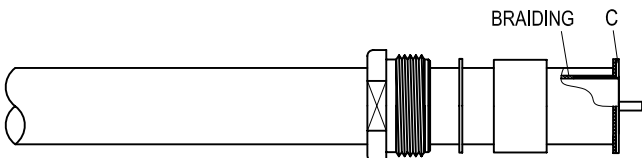
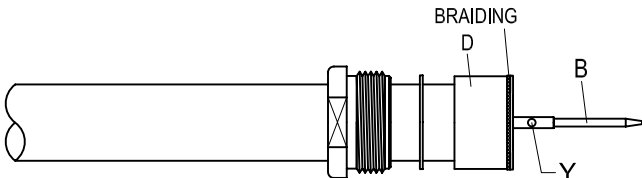
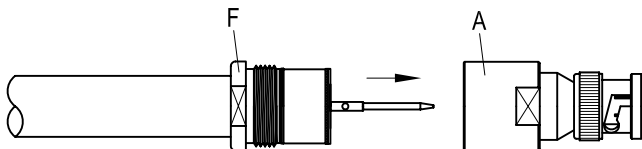
Suitable Cables: 10C-2W

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

BNC3200-010C2		DATE	2016/04/18	REV	—
A	B	C	D	E	F
					
BODY	CONTACT PIN	TOP HAT	GASKET	WASHER	NUT
DIAGRAM		ASSEMBLY INSTRUCTION			
		Step 1: STRIP AS SHOWN.			
		Step 2: SLIDE NUT " F " 、 WASHER " E " AND GASKET " D " OVER CABLE.			
		Step 3: SLIDE TOP HAT " C " BETWEEN BRAIDING AND DIELECTRIC.			
		Step 4: SLIDE GASKET " D " TOWARDS THE BRAIDING. Step 5: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ".			
		Step 6: FINALLY SCREW NUT " F " ON THE CONNECTOR BODY " A ".			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	