


ADS-A3-1.0/8-27-1.15	SMA Plug to 1.0mm Jack 27GHz VSWR 1.15	50Ω
----------------------	---	-----

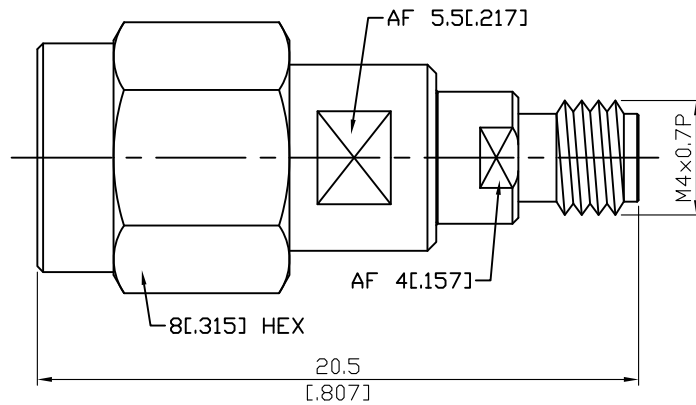

Parts	Material	Plating (Micro-inch)
Coupling Nut	Stainless Steel	Passivated
Body	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PEI & PTFE	
Ring	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3-1.0/8-27-1.15	SMA Plug to 1.0mm Jack 27GHz VSWR 1.15	
Interface Standard Mechanically compatible with	1.00 IEEE287; IEC61169-31	SMA MIL-STD-348B 3.5 & 2.92
Electrical Data Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	27Ω DC To 27GHz ≤ 1.15 (DC To 40GHz) ≤ 0.05 x √f(GHz) dB ≥ 5000MΩ 500 V rms 150 V rms	
Mechanical Data Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	1.00 2.65 to 3.63 in-lbs 6.2 in-lbs ≥ 2.25 lbs ≥ 500	SMA 7 to 9.5 in-lbs 15 in-lbs ≥ 6.1 lbs ≥ 500
Environmental Data Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-40°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.