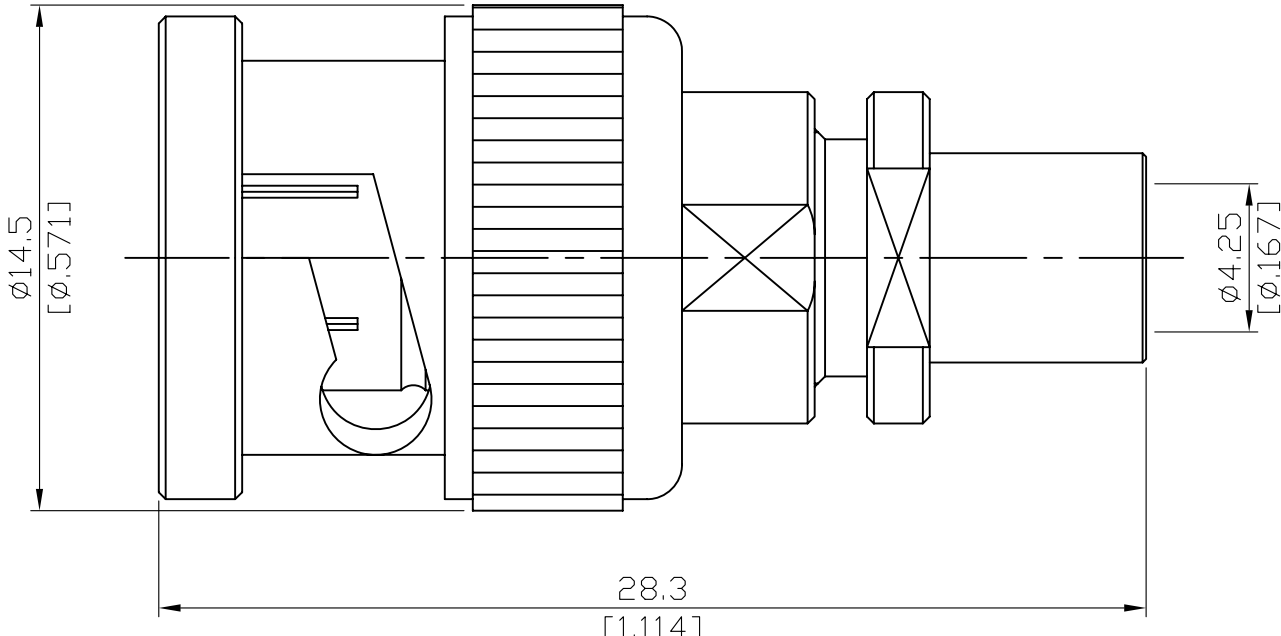


BNC3200-S402		BNC plug solder clamp for flexible RG402; 4GHz VSWR 1.2		50Ω																																																		
																																																						
Note: 1. Precision connector up to 4GHz 2. Solder clamp design ensures a sturdy connector/cable connection 3. Manufacturing low loss high frequency RF assemblies requires expertise.																																																						
<table><tr><th>Parts</th><th>Material</th><th colspan="3">Plating (Micro-inch)</th></tr><tr><td>Coupling Nut</td><td>Brass</td><td colspan="3">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Body</td><td>Brass</td><td colspan="3">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Insulator</td><td>Teflon</td><td colspan="3"></td></tr><tr><td>Spring</td><td>SK5</td><td colspan="3">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Washer</td><td>Brass</td><td colspan="3">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr><tr><td>Gasket</td><td>Silicone</td><td colspan="3"></td></tr><tr><td>Solder Ferrule</td><td>Brass</td><td colspan="3">Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Contact Pin</td><td>Brass</td><td colspan="3">Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr><tr><td>Clamp Nut</td><td>Brass</td><td colspan="3">Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr></table>					Parts	Material	Plating (Micro-inch)			Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50			Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50			Insulator	Teflon				Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50			Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50			Gasket	Silicone				Solder Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20			Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20			Clamp Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50		
Parts	Material	Plating (Micro-inch)																																																				
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																																				
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																																				
Insulator	Teflon																																																					
Spring	SK5	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																																				
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																																				
Gasket	Silicone																																																					
Solder Ferrule	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																																																				
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																																																				
Clamp Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50																																																				
Suitable Cables: 5003; SS402; Multiflex 141; T-Flex 402; .141SRF-W-P-50-F																																																						





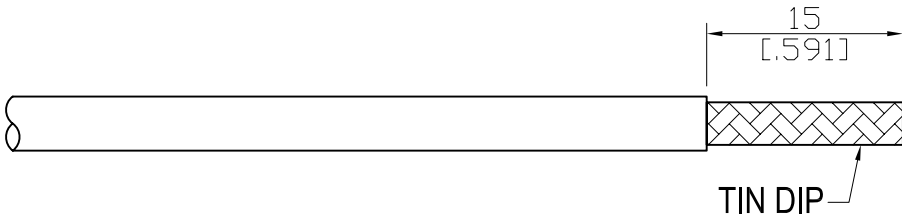
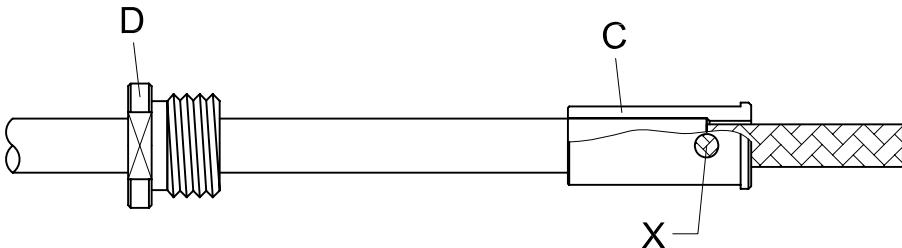
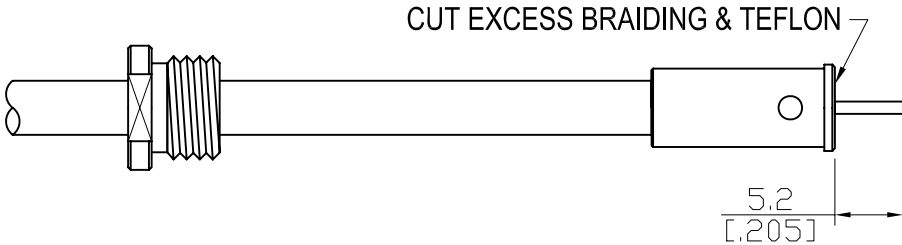
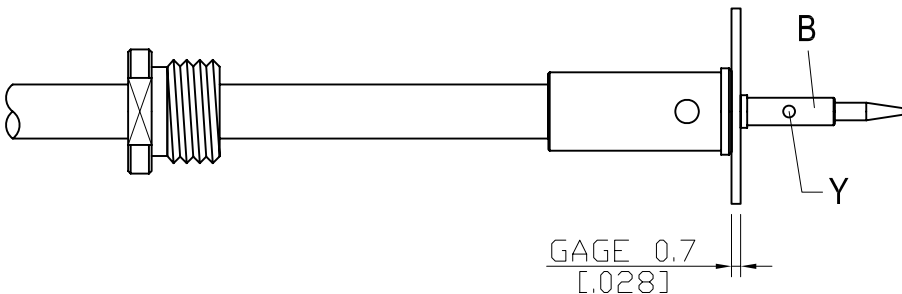
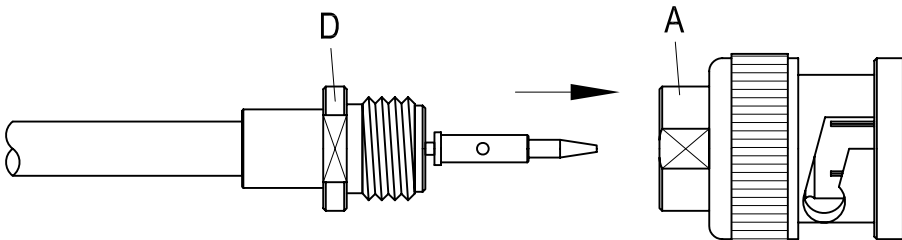
This part number complies with RoHS.
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

BNC	BNC3200-S402																		
Interface MIL-STD-348B																			
Electrical Data <table> <tr> <td>Impedance</td><td>50Ω</td></tr> <tr> <td>Frequency range</td><td>DC to 4GHz</td></tr> <tr> <td>VSWR</td><td>≤ 1.2 (DC to 4GHz)</td></tr> <tr> <td>Insertion loss</td><td>≤ 0.1 x √f(GHz)dB</td></tr> <tr> <td>Insulation resistance</td><td>≥ 5000MΩ</td></tr> <tr> <td>Contact resistance inner conductor</td><td>≤ 1.5mΩ</td></tr> <tr> <td>Contact resistance outer conductor</td><td>≤ 1mΩ</td></tr> <tr> <td>Dielectric withstanding voltage (at sea level)</td><td>1500 V rms</td></tr> <tr> <td>Working voltage (at sea level)</td><td>500 V rms</td></tr> </table>		Impedance	50Ω	Frequency range	DC to 4GHz	VSWR	≤ 1.2 (DC to 4GHz)	Insertion loss	≤ 0.1 x √f(GHz)dB	Insulation resistance	≥ 5000MΩ	Contact resistance inner conductor	≤ 1.5mΩ	Contact resistance outer conductor	≤ 1mΩ	Dielectric withstanding voltage (at sea level)	1500 V rms	Working voltage (at sea level)	500 V rms
Impedance	50Ω																		
Frequency range	DC to 4GHz																		
VSWR	≤ 1.2 (DC to 4GHz)																		
Insertion loss	≤ 0.1 x √f(GHz)dB																		
Insulation resistance	≥ 5000MΩ																		
Contact resistance inner conductor	≤ 1.5mΩ																		
Contact resistance outer conductor	≤ 1mΩ																		
Dielectric withstanding voltage (at sea level)	1500 V rms																		
Working voltage (at sea level)	500 V rms																		
Mechanical Data <table> <tr> <td>Recommended coupling nut torque</td><td>0.6 to 2.5 inch lbs</td></tr> <tr> <td>Coupling nut retention force</td><td>≥ 101.2 lbs</td></tr> <tr> <td>Contact captivation-axial</td><td>≥ 6.1 lbs</td></tr> <tr> <td>Durability (mating)</td><td>≥ 500</td></tr> </table>		Recommended coupling nut torque	0.6 to 2.5 inch lbs	Coupling nut retention force	≥ 101.2 lbs	Contact captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500										
Recommended coupling nut torque	0.6 to 2.5 inch lbs																		
Coupling nut retention force	≥ 101.2 lbs																		
Contact captivation-axial	≥ 6.1 lbs																		
Durability (mating)	≥ 500																		
Environmental Data <table> <tr> <td>Temperature range</td><td>-65°C to +165°C</td></tr> <tr> <td>Thermal shock</td><td>MIL-STD-202, Method 107, Condition B</td></tr> <tr> <td>Moisture resistance</td><td>MIL-STD-202, Method 106</td></tr> <tr> <td>Corrosion</td><td>MIL-STD-202, Method 101, Condition B</td></tr> <tr> <td>RoHS</td><td>Compliant</td></tr> </table>		Temperature range	-65°C to +165°C	Thermal shock	MIL-STD-202, Method 107, Condition B	Moisture resistance	MIL-STD-202, Method 106	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature range	-65°C to +165°C																		
Thermal shock	MIL-STD-202, Method 107, Condition B																		
Moisture resistance	MIL-STD-202, Method 106																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		
Tooling <table> <tr> <td>Soldering gauge 0.7mm thick</td><td>ST-0.7</td></tr> </table>		Soldering gauge 0.7mm thick	ST-0.7																
Soldering gauge 0.7mm thick	ST-0.7																		

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

BNC3200-S402		DATE	2014/04/29	REV	—		
A  BODY		B  CONTACT PIN		C  SOLDER FERRULE		D  NUT	
DIAGRAM				ASSEMBLY INSTRUCTION			
				Step 1: STRIP AS SHOWN AND TIN DIP BRAIDING.			
				Step 2: SLIDE NUT " D " AND SOLDER FERRULE " C " OVER THE CABLE. Step 3: SOLDER IN " X ".			
				Step 5: CUT AWAY ANY EXCESS BRAID AND TEFLON STICKING OUT OF THE SOLDER FERRULE. Step 6: CUT CENTER CONDUCTOR TO LENGTH.			
				Step 7: PUT 0.7 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ".			
				Step 8: FINALLY SCREW " D " ON THE CONNECTOR BODY " A ".			
This part number complies with RoHS.							
Notice: JYEBAO reserves the right to make modifications deemed appropriate.							
APPROVED		CHECKED		DRAWING			
				Albert			