


ADS-A3A3-27-1.15

SMA Plug To SMA Plug
26.5GHz VSWR 1.15

50Ω

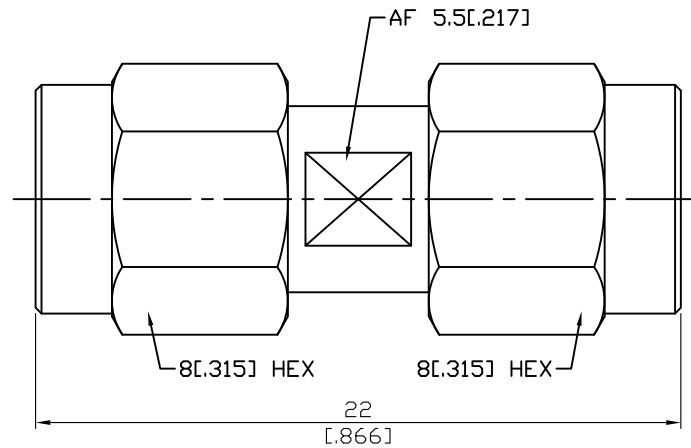

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3A3-27-1.15	SMA Plug To SMA Plug 26.5GHz VSWR 1.15																
<table border="0"> <tr> <td colspan="2" data-bbox="129 342 531 394">Interface</td> </tr> <tr> <td data-bbox="129 405 774 439">Standard</td> <td data-bbox="774 405 1481 439">MIL-STD-348B</td> </tr> <tr> <td data-bbox="129 450 774 483">Mechanically compatible with</td> <td data-bbox="774 450 1481 483">2.92 & 3.5</td> </tr> </table>		Interface		Standard	MIL-STD-348B	Mechanically compatible with	2.92 & 3.5										
Interface																	
Standard	MIL-STD-348B																
Mechanically compatible with	2.92 & 3.5																
<table border="0"> <tr> <td colspan="2" data-bbox="129 607 531 658">Electrical Data</td> </tr> <tr> <td data-bbox="129 663 774 696">Impedance</td> <td data-bbox="774 663 1481 696">50Ω</td> </tr> <tr> <td data-bbox="129 707 774 741">Frequency Range</td> <td data-bbox="774 707 1481 741">DC To 26.5GHz</td> </tr> <tr> <td data-bbox="129 752 774 786">VSWR</td> <td data-bbox="774 752 1481 786">≤ 1.15 (DC To 26.5GHz)</td> </tr> <tr> <td data-bbox="129 797 774 831">Insertion Loss</td> <td data-bbox="774 797 1481 831">≤ 0.04 x √f(GHz) dB</td> </tr> <tr> <td data-bbox="129 842 774 875">Insulation Resistance</td> <td data-bbox="774 842 1481 875">≥ 5000MΩ</td> </tr> <tr> <td data-bbox="129 887 774 920">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="774 887 1481 920">1500 V rms</td> </tr> <tr> <td data-bbox="129 931 774 965">Working Voltage (at sea level)</td> <td data-bbox="774 931 1481 965">500 V rms</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC To 26.5GHz	VSWR	≤ 1.15 (DC To 26.5GHz)	Insertion Loss	≤ 0.04 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	1500 V rms	Working Voltage (at sea level)	500 V rms
Electrical Data																	
Impedance	50Ω																
Frequency Range	DC To 26.5GHz																
VSWR	≤ 1.15 (DC To 26.5GHz)																
Insertion Loss	≤ 0.04 x √f(GHz) dB																
Insulation Resistance	≥ 5000MΩ																
Dielectric Withstanding Voltage (at sea level)	1500 V rms																
Working Voltage (at sea level)	500 V rms																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1104 531 1155">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1160 774 1193">Recommended Coupling Nut Torque</td> <td data-bbox="774 1160 1481 1193">7 to 9.5 in-lbs</td> </tr> <tr> <td data-bbox="129 1205 774 1238">Coupling Proof Torque</td> <td data-bbox="774 1205 1481 1238">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1249 774 1283">Coupling Nut Retention Force</td> <td data-bbox="774 1249 1481 1283">≥ 60.7 lbs</td> </tr> <tr> <td data-bbox="129 1294 774 1328">Contact Captivation-axial</td> <td data-bbox="774 1294 1481 1328">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="129 1339 774 1373">Durability (mating)</td> <td data-bbox="774 1339 1481 1373">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	7 to 9.5 in-lbs	Coupling Proof Torque	15 in-lbs	Coupling Nut Retention Force	≥ 60.7 lbs	Contact Captivation-axial	≥ 6.1 lbs	Durability (mating)	≥ 500				
Mechanical Data																	
Recommended Coupling Nut Torque	7 to 9.5 in-lbs																
Coupling Proof Torque	15 in-lbs																
Coupling Nut Retention Force	≥ 60.7 lbs																
Contact Captivation-axial	≥ 6.1 lbs																
Durability (mating)	≥ 500																
<table border="0"> <tr> <td colspan="2" data-bbox="129 1507 531 1559">Environmental Data</td> </tr> <tr> <td data-bbox="129 1563 774 1597">Temperature Range</td> <td data-bbox="774 1563 1481 1597">-65°C to +165°C</td> </tr> <tr> <td data-bbox="129 1608 774 1641">Thermal Shock</td> <td data-bbox="774 1608 1481 1641">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1653 774 1686">Moisture Resistance</td> <td data-bbox="774 1653 1481 1686">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1697 774 1731">Corrosion</td> <td data-bbox="774 1697 1481 1731">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1742 774 1776">RoHS</td> <td data-bbox="774 1742 1481 1776">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-65°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant				
Environmental Data																	
Temperature Range	-65°C to +165°C																
Thermal Shock	MIL-STD-202, Method 107, Condition B																
Moisture Resistance	MIL-STD-202, Method 206																
Corrosion	MIL-STD-202, Method 101, Condition B																
RoHS	Compliant																

ADS-A3A3-27-1.15

