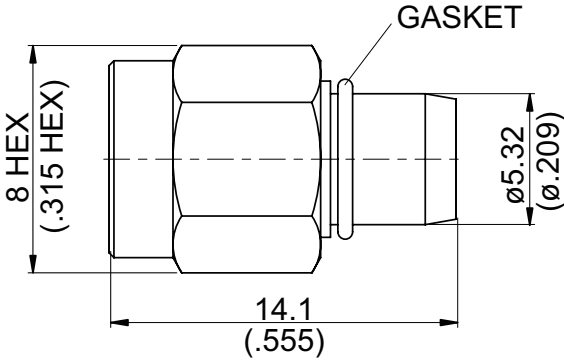


ADS-A3J3	Stainless SMA Plug To BMA Plug 18GHz VSWR 1.15		50Ω
			
Parts	Material	Plating (Micro-inch)	
Gasket	Silicone		
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Stainless Steel	Passivated	
Coupling Nut	Stainless Steel	Passivated	
Weight: 2.54 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3J3	Stainless SMA Plug To BMA Plug 18GHz VSWR 1.15																									
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">SMA</th> <th style="width: 50%;">BMA</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">MIL-STD-348B</td> </tr> <tr> <td style="text-align: center;">2.92 & 3.5</td> <td></td> </tr> </tbody> </table>	SMA	BMA	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5																				
SMA	BMA																									
MIL-STD-348B	MIL-STD-348B																									
2.92 & 3.5																										
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td colspan="2" style="text-align: center;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td colspan="2" style="text-align: center;">DC To 18GHz</td> </tr> <tr> <td>VSWR</td> <td colspan="2" style="text-align: center;">≤ 1.15 (DC To 18GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td colspan="2" style="text-align: center;">≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td colspan="2" style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">1500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td colspan="2" style="text-align: center;">1000 V rms</td> </tr> </tbody> </table>		Impedance	50Ω		Frequency Range	DC To 18GHz		VSWR	≤ 1.15 (DC To 18GHz)		Insertion Loss	≤ 0.05 x √f(GHz) dB		Insulation Resistance	≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)	1500 V rms		Working Voltage (at sea level)	1000 V rms				
Impedance	50Ω																									
Frequency Range	DC To 18GHz																									
VSWR	≤ 1.15 (DC To 18GHz)																									
Insertion Loss	≤ 0.05 x √f(GHz) dB																									
Insulation Resistance	≥ 5000MΩ																									
Dielectric Withstanding Voltage (at sea level)	1500 V rms																									
Working Voltage (at sea level)	1000 V rms																									
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating) Engagement Force Disengagement Force	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;"></th> <th style="width: 25%;">SMA</th> <th style="width: 25%;">BMA</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td style="text-align: center;">7 to 9.5 in-lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Coupling Nut Retention Force</td> <td style="text-align: center;">≥ 60.7 lbs</td> <td style="text-align: center;">NA</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: center;">≥ 6.1 lbs</td> <td style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 1000</td> </tr> <tr> <td>Engagement Force</td> <td style="text-align: center;">NA</td> <td style="text-align: center;">≤ 3 lbs</td> </tr> <tr> <td>Disengagement Force</td> <td style="text-align: center;">NA</td> <td style="text-align: center;">≤ 1.5 lbs</td> </tr> </tbody> </table>			SMA	BMA	Recommended Coupling Nut Torque	7 to 9.5 in-lbs	NA	Coupling Proof Torque	15 in-lbs	NA	Coupling Nut Retention Force	≥ 60.7 lbs	NA	Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs	Durability (mating)	≥ 500	≥ 1000	Engagement Force	NA	≤ 3 lbs	Disengagement Force	NA	≤ 1.5 lbs
	SMA	BMA																								
Recommended Coupling Nut Torque	7 to 9.5 in-lbs	NA																								
Coupling Proof Torque	15 in-lbs	NA																								
Coupling Nut Retention Force	≥ 60.7 lbs	NA																								
Contact Captivation-axial	≥ 6.1 lbs	≥ 6.1 lbs																								
Durability (mating)	≥ 500	≥ 1000																								
Engagement Force	NA	≤ 3 lbs																								
Disengagement Force	NA	≤ 1.5 lbs																								
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td colspan="2" style="text-align: center;">-65°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td colspan="2" style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td colspan="2" style="text-align: center;">Compliant</td> </tr> </tbody> </table>		Temperature Range	-65°C to +165°C		Thermal Shock	MIL-STD-202, Method 107, Condition B		Moisture Resistance	MIL-STD-202, Method 206		Corrosion	MIL-STD-202, Method 101, Condition B		RoHS	Compliant										
Temperature Range	-65°C to +165°C																									
Thermal Shock	MIL-STD-202, Method 107, Condition B																									
Moisture Resistance	MIL-STD-202, Method 206																									
Corrosion	MIL-STD-202, Method 101, Condition B																									
RoHS	Compliant																									

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3J3

