


ADS-A3N8-18-1.15

SMA Plug To N Jack  
18GHz VSWR 1.15

50Ω

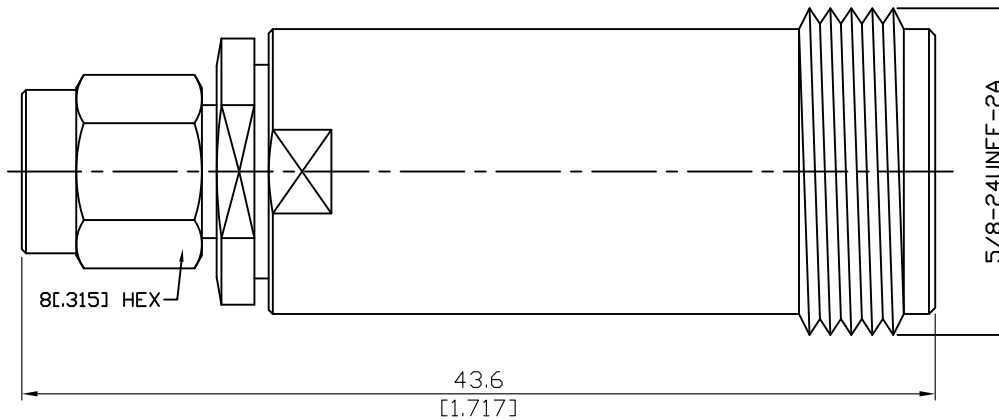

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 200 Over Copper 50
Gasket	Silicone	
Insulator	Teflon	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3N8-18-1.15	SMA Plug To N Jack 18GHz VSWR 1.15															
<b>Interface</b> Standard Mechanically compatible with	<table border="1"> <thead> <tr> <th data-bbox="780 344 1123 394">SMA</th> <th data-bbox="1123 344 1482 394">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1482 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 492">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1482 492"></td> </tr> </tbody> </table>	SMA	N	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5										
SMA	N															
MIL-STD-348B	MIL-STD-348B															
2.92 & 3.5																
<b>Electrical Data</b> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table border="1"> <tbody> <tr> <td data-bbox="780 656 1123 705">50Ω</td> <td data-bbox="1123 656 1482 705"></td> </tr> <tr> <td data-bbox="780 705 1123 754">DC To 18GHz</td> <td data-bbox="1123 705 1482 754"></td> </tr> <tr> <td data-bbox="780 754 1123 804">≤ 1.15 (DC To 18GHz)</td> <td data-bbox="1123 754 1482 804"></td> </tr> <tr> <td data-bbox="780 804 1123 853">≤ 0.04 x √f(GHz) dB</td> <td data-bbox="1123 804 1482 853"></td> </tr> <tr> <td data-bbox="780 853 1123 902">≥ 5000MΩ</td> <td data-bbox="1123 853 1482 902"></td> </tr> <tr> <td data-bbox="780 902 1123 952">1500 V rms</td> <td data-bbox="1123 902 1482 952"></td> </tr> <tr> <td data-bbox="780 952 1123 1001">500 V rms</td> <td data-bbox="1123 952 1482 1001"></td> </tr> </tbody> </table>		50Ω		DC To 18GHz		≤ 1.15 (DC To 18GHz)		≤ 0.04 x √f(GHz) dB		≥ 5000MΩ		1500 V rms		500 V rms	
50Ω																
DC To 18GHz																
≤ 1.15 (DC To 18GHz)																
≤ 0.04 x √f(GHz) dB																
≥ 5000MΩ																
1500 V rms																
500 V rms																
<b>Mechanical Data</b> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	<table border="1"> <thead> <tr> <th data-bbox="780 1160 1123 1209">SMA</th> <th data-bbox="1123 1160 1482 1209">N</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1209 1123 1258">7 to 9.5 in-lbs</td> <td data-bbox="1123 1209 1482 1258">6 to 10 in-lbs</td> </tr> <tr> <td data-bbox="780 1258 1123 1308">15 in-lbs</td> <td data-bbox="1123 1258 1482 1308">15 in-lbs</td> </tr> <tr> <td data-bbox="780 1308 1123 1357">≥ 60.7 lbs</td> <td data-bbox="1123 1308 1482 1357">NA</td> </tr> <tr> <td data-bbox="780 1357 1123 1406">≥ 6.1 lbs</td> <td data-bbox="1123 1357 1482 1406">≥ 6.3 lbs</td> </tr> <tr> <td data-bbox="780 1406 1123 1456">≥ 500</td> <td data-bbox="1123 1406 1482 1456">≥ 500</td> </tr> </tbody> </table>		SMA	N	7 to 9.5 in-lbs	6 to 10 in-lbs	15 in-lbs	15 in-lbs	≥ 60.7 lbs	NA	≥ 6.1 lbs	≥ 6.3 lbs	≥ 500	≥ 500		
SMA	N															
7 to 9.5 in-lbs	6 to 10 in-lbs															
15 in-lbs	15 in-lbs															
≥ 60.7 lbs	NA															
≥ 6.1 lbs	≥ 6.3 lbs															
≥ 500	≥ 500															
<b>Environmental Data</b> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table border="1"> <tbody> <tr> <td data-bbox="780 1603 1123 1653">-65°C to +165°C</td> <td data-bbox="1123 1603 1482 1653"></td> </tr> <tr> <td data-bbox="780 1653 1123 1702">MIL-STD-202, Method 107, Condition B</td> <td data-bbox="1123 1653 1482 1702"></td> </tr> <tr> <td data-bbox="780 1702 1123 1751">MIL-STD-202, Method 206</td> <td data-bbox="1123 1702 1482 1751"></td> </tr> <tr> <td data-bbox="780 1751 1123 1800">MIL-STD-202, Method 101, Condition B</td> <td data-bbox="1123 1751 1482 1800"></td> </tr> <tr> <td data-bbox="780 1800 1123 1850">Compliant</td> <td data-bbox="1123 1800 1482 1850"></td> </tr> </tbody> </table>		-65°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant					
-65°C to +165°C																
MIL-STD-202, Method 107, Condition B																
MIL-STD-202, Method 206																
MIL-STD-202, Method 101, Condition B																
Compliant																

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# ADS-A3N8-18-1.15

