


ADS-A3T8-18-1.15

SMA Plug To TNC Jack  
18GHz VSWR 1.15

50Ω

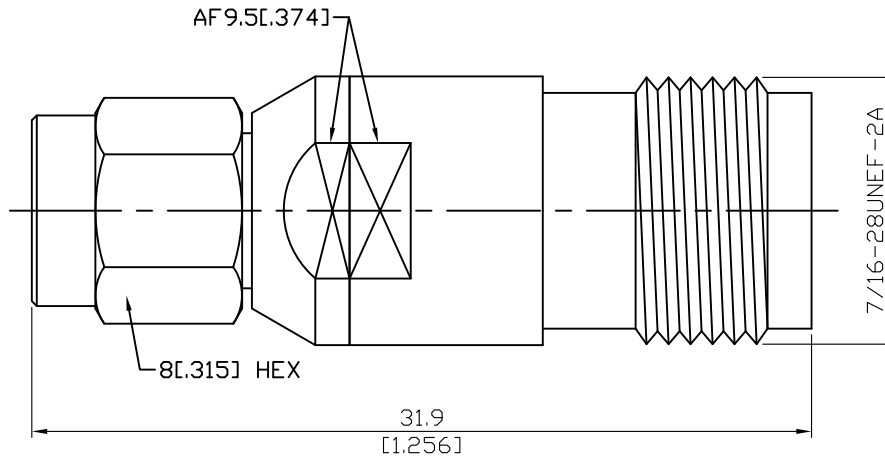

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A3T8-18-1.15	SMA Plug To TNC Jack 18GHz VSWR 1.15													
<div style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard Mechanically compatible with</p>	<table border="1"> <thead> <tr> <th data-bbox="780 344 1123 394">SMA</th> <th data-bbox="1123 344 1482 394">TNC</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1482 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 492">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1482 492"></td> </tr> </tbody> </table>	SMA	TNC	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5								
SMA	TNC													
MIL-STD-348B	MIL-STD-348B													
2.92 & 3.5														
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p>Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)</p>	<p>50Ω DC To 18GHz ≤ 1.15 (DC To 18GHz) ≤ 0.05 x √f(GHz) dB ≥ 5000MΩ 1500 V rms 500 V rms</p>													
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p>Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)</p>	<table border="1"> <thead> <tr> <th data-bbox="780 1102 1123 1151">SMA</th> <th data-bbox="1123 1102 1482 1151">TNC</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1151 1123 1200">7 to 9.5 in-lbs</td> <td data-bbox="1123 1151 1482 1200">4.1 to 6.1 in-lbs</td> </tr> <tr> <td data-bbox="780 1200 1123 1249">15 in-lbs</td> <td data-bbox="1123 1200 1482 1249">15 in-lbs</td> </tr> <tr> <td data-bbox="780 1249 1123 1299">≥ 60.7 lbs</td> <td data-bbox="1123 1249 1482 1299">NA</td> </tr> <tr> <td data-bbox="780 1299 1123 1348">≥ 6.1 lbs</td> <td data-bbox="1123 1299 1482 1348">≥ 6.1 lbs</td> </tr> <tr> <td data-bbox="780 1348 1123 1397">≥ 500</td> <td data-bbox="1123 1348 1482 1397">≥ 500</td> </tr> </tbody> </table>	SMA	TNC	7 to 9.5 in-lbs	4.1 to 6.1 in-lbs	15 in-lbs	15 in-lbs	≥ 60.7 lbs	NA	≥ 6.1 lbs	≥ 6.1 lbs	≥ 500	≥ 500	
SMA	TNC													
7 to 9.5 in-lbs	4.1 to 6.1 in-lbs													
15 in-lbs	15 in-lbs													
≥ 60.7 lbs	NA													
≥ 6.1 lbs	≥ 6.1 lbs													
≥ 500	≥ 500													
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p>Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS</p>	<p>-65°C to +165°C MIL-STD-202, Method MIL-STD-202, Method MIL-STD-202, Method Compliant</p>													

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# ADS-A3T8-18-1.15

