


ADS-A8-1.0/3-27-1.15	SMA Jack to 1.0mm Plug 27GHz VSWR 1.15	50Ω
----------------------	---	-----

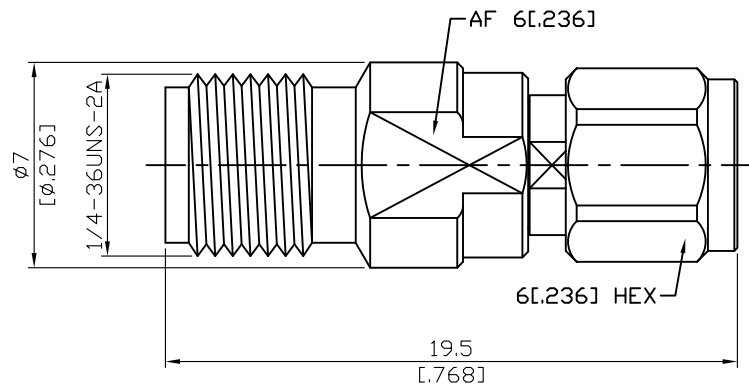

Parts	Material	Plating ( Micro-inch )
Coupling Nut	Stainless Steel	Passivated
Body	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PEI & PTFE	
Ring	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A8-1.0/3-27-1.15	SMA Jack to 1.0mm Plug 27GHz VSWR 1.15																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">1.00</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>IEEE287; IEC61169-31</td> <td>MIL-STD-348B</td> </tr> <tr> <td></td> <td>3.5 &amp; 2.92</td> </tr> </tbody> </table>	1.00	SMA	IEEE287; IEC61169-31	MIL-STD-348B		3.5 & 2.92													
1.00	SMA																			
IEEE287; IEC61169-31	MIL-STD-348B																			
	3.5 & 2.92																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Impedance</td> <td style="width: 50%;">27Ω</td> </tr> <tr> <td>Frequency Range</td> <td>DC To 27GHz</td> </tr> <tr> <td>VSWR</td> <td>≤ 1.15 (DC To 40GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td>≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td>≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td>500 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td>150 V rms</td> </tr> </tbody> </table>		Impedance	27Ω	Frequency Range	DC To 27GHz	VSWR	≤ 1.15 (DC To 40GHz)	Insertion Loss	≤ 0.05 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	500 V rms	Working Voltage (at sea level)	150 V rms				
Impedance	27Ω																			
Frequency Range	DC To 27GHz																			
VSWR	≤ 1.15 (DC To 40GHz)																			
Insertion Loss	≤ 0.05 x √f(GHz) dB																			
Insulation Resistance	≥ 5000MΩ																			
Dielectric Withstanding Voltage (at sea level)	500 V rms																			
Working Voltage (at sea level)	150 V rms																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">1.00</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>Recommended Coupling Nut Torque</td> <td>2.65 to 3.63 in-lbs</td> </tr> <tr> <td>Coupling Proof Torque</td> <td>6.2 in-lbs</td> </tr> <tr> <td>Contact Captivation-axial</td> <td>≥ 2.25 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td>≥ 500</td> </tr> <tr> <td></td> <td>7 to 9.5 in-lbs</td> </tr> <tr> <td></td> <td>15 in-lbs</td> </tr> <tr> <td></td> <td>≥ 6.1 lbs</td> </tr> <tr> <td></td> <td>≥ 500</td> </tr> </tbody> </table>		1.00	SMA	Recommended Coupling Nut Torque	2.65 to 3.63 in-lbs	Coupling Proof Torque	6.2 in-lbs	Contact Captivation-axial	≥ 2.25 lbs	Durability (mating)	≥ 500		7 to 9.5 in-lbs		15 in-lbs		≥ 6.1 lbs		≥ 500
1.00	SMA																			
Recommended Coupling Nut Torque	2.65 to 3.63 in-lbs																			
Coupling Proof Torque	6.2 in-lbs																			
Contact Captivation-axial	≥ 2.25 lbs																			
Durability (mating)	≥ 500																			
	7 to 9.5 in-lbs																			
	15 in-lbs																			
	≥ 6.1 lbs																			
	≥ 500																			
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">Temperature Range</td> <td style="width: 50%;">-40°C to +165°C</td> </tr> <tr> <td>Thermal Shock</td> <td>MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td>Compliant</td> </tr> </tbody> </table>		Temperature Range	-40°C to +165°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant								
Temperature Range	-40°C to +165°C																			
Thermal Shock	MIL-STD-202, Method 107, Condition B																			
Moisture Resistance	MIL-STD-202, Method 206																			
Corrosion	MIL-STD-202, Method 101, Condition B																			
RoHS	Compliant																			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.