


ADS-A8-2.4/8-27-1.2	SMA Jack to 2.4 Jack 27GHz VSWR 1.2	50Ω
---------------------	----------------------------------------	-----

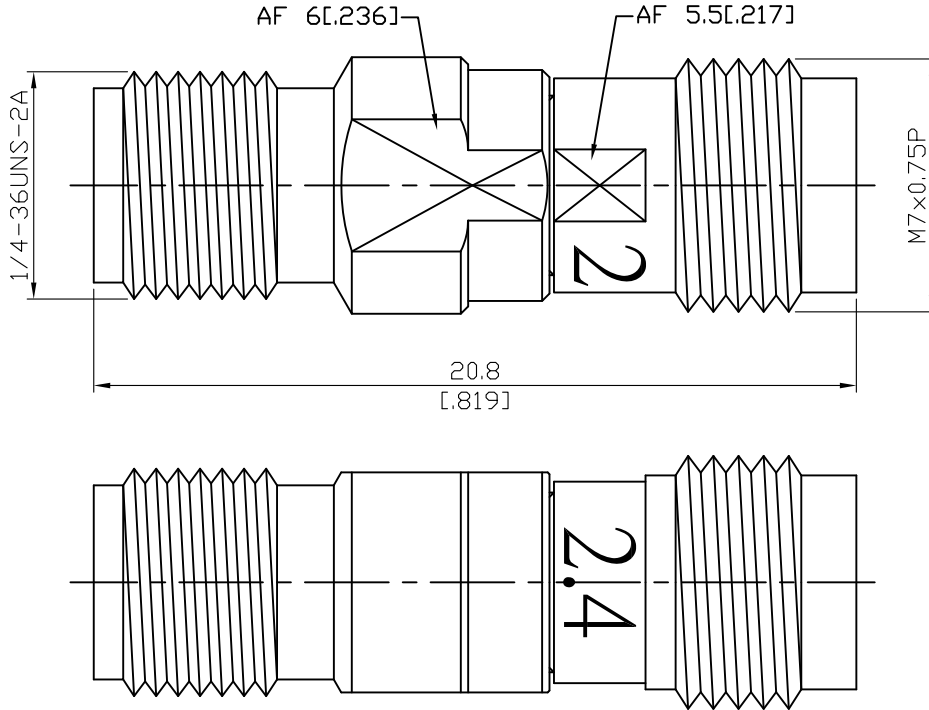

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator (2.4)	PPO	
Body	Stainless Steel	Passivated
Insulator (SMA)	PTFE	

Weight: 3.6 g	
---------------	--

This part number complies with RoHS.
 Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A8-2.4/8-27-1.2	SMA Jack to 2.4 Jack 27GHz VSWR 1.2											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.4</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>MIL-STD-348B</td> </tr> <tr> <td>1.85</td> <td>2.92 & 3.5</td> </tr> </tbody> </table>	2.4	SMA	MIL-STD-348B	MIL-STD-348B	1.85	2.92 & 3.5					
2.4	SMA											
MIL-STD-348B	MIL-STD-348B											
1.85	2.92 & 3.5											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;">DC To 27GHz</td> </tr> <tr> <td>≤ 1.2 (DC To 27GHz)</td> <td>≤ 0.05 x √f(GHz) dB</td> </tr> <tr> <td>≥ 5000MΩ</td> <td>≥ 500V rms</td> </tr> <tr> <td>500 V rms</td> <td>150 V rms</td> </tr> </tbody> </table>		50Ω	DC To 27GHz	≤ 1.2 (DC To 27GHz)	≤ 0.05 x √f(GHz) dB	≥ 5000MΩ	≥ 500V rms	500 V rms	150 V rms		
50Ω	DC To 27GHz											
≤ 1.2 (DC To 27GHz)	≤ 0.05 x √f(GHz) dB											
≥ 5000MΩ	≥ 500V rms											
500 V rms	150 V rms											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.4</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td>7.08 to 9.74 in-lbs</td> <td>7.5 to 9.5 in-lbs</td> </tr> <tr> <td>15 in-lbs</td> <td>15 in-lbs</td> </tr> <tr> <td>≥ 4.5 lbs</td> <td>≥ 6.1 lbs</td> </tr> <tr> <td>≥ 500</td> <td>≥ 500</td> </tr> </tbody> </table>		2.4	SMA	7.08 to 9.74 in-lbs	7.5 to 9.5 in-lbs	15 in-lbs	15 in-lbs	≥ 4.5 lbs	≥ 6.1 lbs	≥ 500	≥ 500
2.4	SMA											
7.08 to 9.74 in-lbs	7.5 to 9.5 in-lbs											
15 in-lbs	15 in-lbs											
≥ 4.5 lbs	≥ 6.1 lbs											
≥ 500	≥ 500											
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-55°C to +105°C</td> <td style="width: 50%;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td>Compliant</td> </tr> </tbody> </table>		-55°C to +105°C	MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant		
-55°C to +105°C	MIL-STD-202, Method 107, Condition B											
	MIL-STD-202, Method 206											
	MIL-STD-202, Method 101, Condition B											
	Compliant											

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A8-2.4-8-27-1.2

