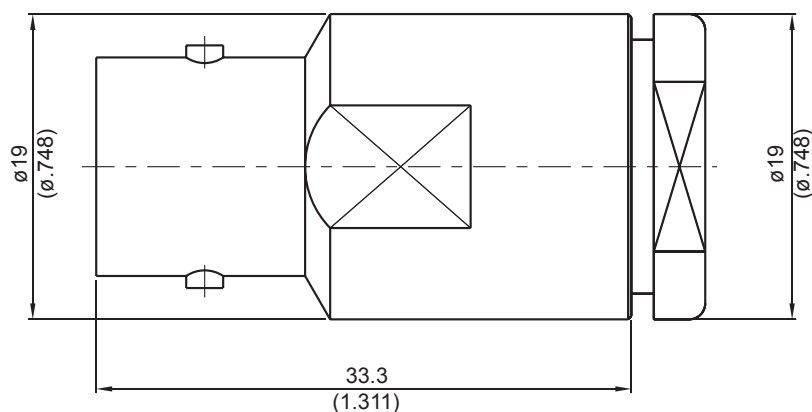


C8200B-0005

C Jack Clamp

50Ω



Parts	Material	Plating(Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:




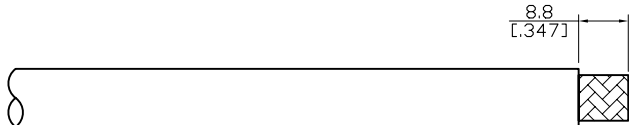
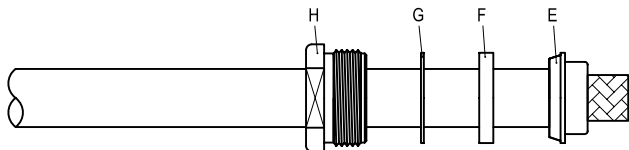
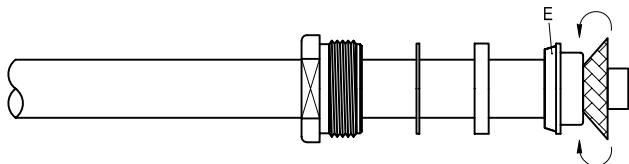
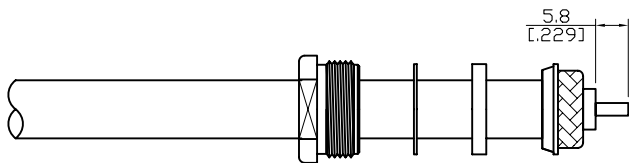
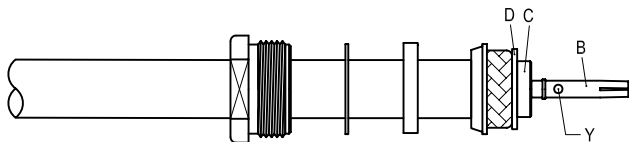
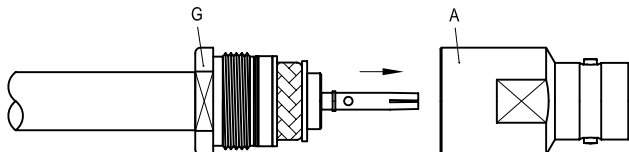
Suitable Cables: RG5

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

C8200B-0005				DATE	2016/04/18	REV	—
A	B	C	D	E	F	G	H
							
BODY	CONTACT PIN	INSULATOR	WASHER	BRAID CLAMP	GASKET	WASHER	NUT
DIAGRAM				ASSEMBLY INSTRUCTION			
				Step 1: STRIP AS SHOWN.			
				Step 2: SLIDE NUT " H " 、 WASHER " G " 、 GASKET " F " AND BRAID CLAMP " E " OVER CABLE.			
				Step 3: WRAP THE BRAIDING OVER " E " .			
				Step 4: STRIP AS SHOWN.			
				Step 5: SLIDE PREPARED CABLE INTO WASHER " D " AND INSULATOR " C " . Step 6: PUT CONTACT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y " . (USE 2.55mm/0.100inch HEX SECTION OF INSERT-A IF CRIMPED)			
				Step 7: FINALLY SCREW NUT " G " ON THE CONNECTOR BODY " A " .			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.							
APPROVED			CHECKED			DRAWING	
						Albert	