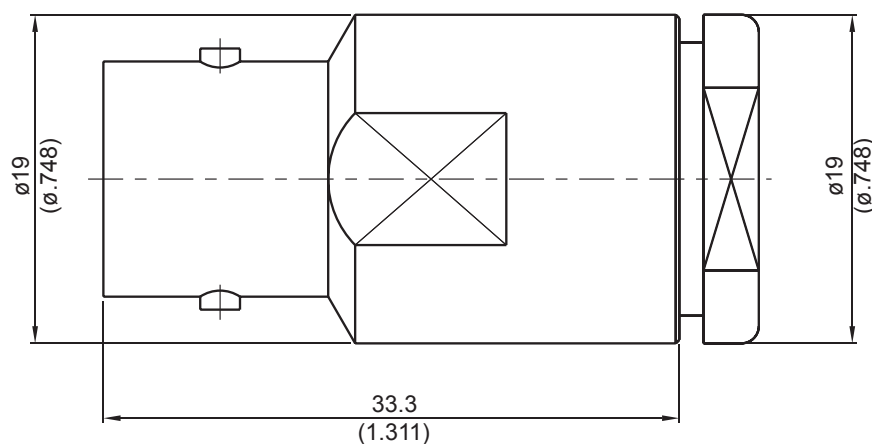


C8200B-0214

C Jack Clamp

50Ω



Parts	Material	Plating(Micro-inch)
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Braid Clamp	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 38.84 g


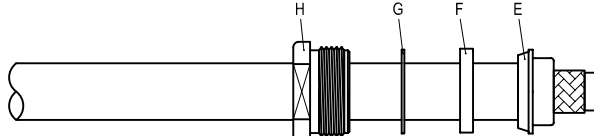
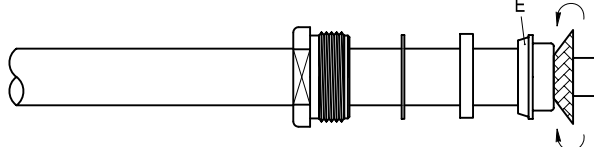
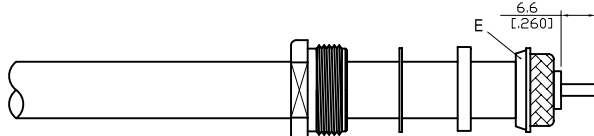
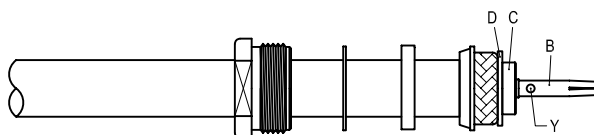
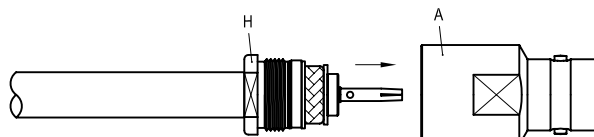
Suitable Cables: RG214

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

C8200B-0214				DATE	2017/03/27	REV	—
A	B	C	D	E	F	G	H
							
BODY	CONTACT PIN	INSULATOR	WASHER	BRAID CLAMP	GASKET	WASHER	NUT
DIAGRAM				ASSEMBLY INSTRUCTION			
				Step 1: STRIP AS SHOWN.			
				Step 2: SLIDE NUT " H " 、 WASHER " G " 、 GASKET " F " AND BRAID CLAMP " E " OVER CABLE .			
				Step 3: WRAP THE BRAIDING OVER " E " .			
				Step 4: STRIP AS SHOWN.			
				Step 5: SLIDE WASHER " D " AND INSULATOR " C " IN PLACE. Step 6: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER OR CRIMP IN " Y " . (USE 2.55mm/1.000inch HEX SECTION OF INSERT-C IF CRIMPED)			
				Step 7: FINALLY SCREW NUT " H " ON THE CONNECTOR BODY " A " .			
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.							
APPROVED		CHECKED			DRAWING		
					Albert		