


ADS-A8K8-27-1.1

SMA Jack to 2.92mm Jack  
27GHz VSWR 1.1

50Ω

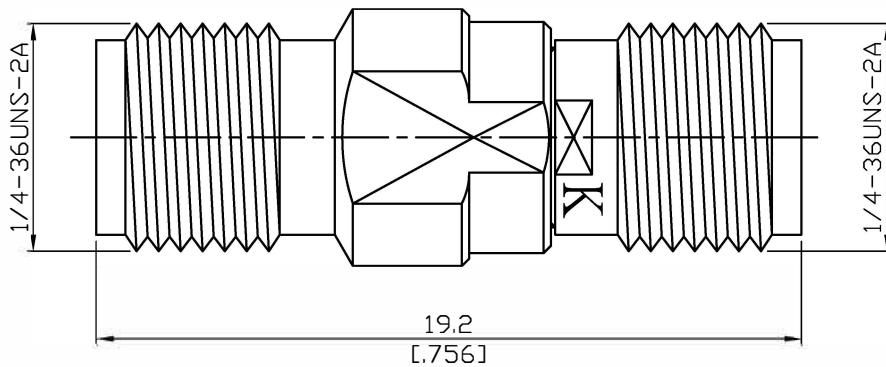

Parts	Material	Plating ( Micro-inch )
Body	Stainless Steel	Passivated
Insulator (SMA)	Teflon	
Insulator (2.92)	PPO	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 1.32 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A8K8-27-1.1	SMA Jack to 2.92mm Jack 27GHz VSWR 1.1													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.92</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">MIL-STD-348B</td> </tr> <tr> <td style="text-align: center;">3.5 &amp; SMA</td> <td style="text-align: center;">2.92 &amp; 3.5</td> </tr> </tbody> </table>	2.92	SMA	MIL-STD-348B	MIL-STD-348B	3.5 & SMA	2.92 & 3.5							
2.92	SMA													
MIL-STD-348B	MIL-STD-348B													
3.5 & SMA	2.92 & 3.5													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;">DC To 27GHz</td> </tr> <tr> <td>≤ 1.1 (DC To 27GHz)</td> <td></td> </tr> <tr> <td>≤ 0.05 x √f(GHz) dB</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>750 V rms</td> <td></td> </tr> <tr> <td>250 V rms</td> <td></td> </tr> </tbody> </table>		50Ω	DC To 27GHz	≤ 1.1 (DC To 27GHz)		≤ 0.05 x √f(GHz) dB		≥ 5000MΩ		750 V rms		250 V rms	
50Ω	DC To 27GHz													
≤ 1.1 (DC To 27GHz)														
≤ 0.05 x √f(GHz) dB														
≥ 5000MΩ														
750 V rms														
250 V rms														
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.92</th> <th style="width: 50%;">SMA</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">11.47 in-lbs</td> <td style="text-align: center;">7 to 9.5 in-lbs</td> </tr> <tr> <td style="text-align: center;">15 in-lbs</td> <td style="text-align: center;">15 in-lbs</td> </tr> <tr> <td style="text-align: center;">≥ 4.9 lbs</td> <td style="text-align: center;">≥ 6.1 lbs</td> </tr> <tr> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>	2.92	SMA	11.47 in-lbs	7 to 9.5 in-lbs	15 in-lbs	15 in-lbs	≥ 4.9 lbs	≥ 6.1 lbs	≥ 500	≥ 500			
2.92	SMA													
11.47 in-lbs	7 to 9.5 in-lbs													
15 in-lbs	15 in-lbs													
≥ 4.9 lbs	≥ 6.1 lbs													
≥ 500	≥ 500													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-55°C to +105°C</td> <td style="width: 50%;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td>Compliant</td> </tr> </tbody> </table>		-55°C to +105°C	MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant				
-55°C to +105°C	MIL-STD-202, Method 107, Condition B													
	MIL-STD-202, Method 206													
	MIL-STD-202, Method 101, Condition B													
	Compliant													

# ADS-A8K8-27-1.1

