


ADS-A8S3

SMA Jack to SMB Plug  
4GHz VSWR 1.2

50Ω

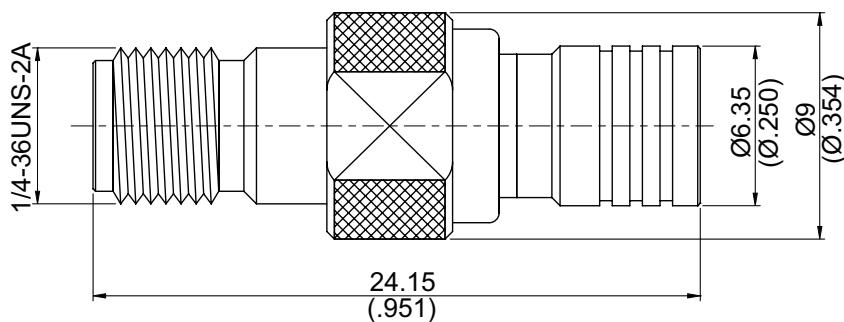

Parts	Material	Plating (Micro-inch)
Body	Stainless Steel	Passivated
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	

Weight:

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-A8S3	SMA Jack to SMB Plug 4GHz VSWR 1.2															
<div data-bbox="129 344 531 394" style="border: 1px solid black; padding: 2px;">Interface</div> <p data-bbox="129 405 531 488">Standard Mechanically Compatible With</p>	<table border="1" data-bbox="780 344 1123 488"> <thead> <tr> <th data-bbox="780 344 1123 394">SMA</th> <th data-bbox="1123 344 1481 394">SMB</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 394 1123 443">MIL-STD-348B</td> <td data-bbox="1123 394 1481 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="780 443 1123 488">2.92 &amp; 3.5</td> <td data-bbox="1123 443 1481 488">SMS</td> </tr> </tbody> </table>	SMA	SMB	MIL-STD-348B	MIL-STD-348B	2.92 & 3.5	SMS									
SMA	SMB															
MIL-STD-348B	MIL-STD-348B															
2.92 & 3.5	SMS															
<div data-bbox="129 560 531 609" style="border: 1px solid black; padding: 2px;">Electrical Data</div> <p data-bbox="129 618 531 936">Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)</p>	<p data-bbox="794 618 1107 936">50Ω DC To 4GHz ≤ 1.2 (DC To 4GHz) ≤ 0.04 x √f(GHz) dB ≥ 5000MΩ 1000 V rms 335 V rms</p>															
<div data-bbox="129 1057 531 1106" style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <p data-bbox="129 1173 531 1451">Recommended Coupling Nut Torque Coupling Proof Torque Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)</p>	<table border="1" data-bbox="780 1115 1481 1458"> <thead> <tr> <th data-bbox="780 1115 1123 1164">SMA</th> <th data-bbox="1123 1115 1481 1164">SMB</th> </tr> </thead> <tbody> <tr> <td data-bbox="780 1164 1123 1214">4 in-lbs</td> <td data-bbox="1123 1164 1481 1214">NA</td> </tr> <tr> <td data-bbox="780 1214 1123 1263">5.3 in-lbs</td> <td data-bbox="1123 1214 1481 1263">NA</td> </tr> <tr> <td data-bbox="780 1263 1123 1312">NA</td> <td data-bbox="1123 1263 1481 1312">1.8 to 14.2 lbs</td> </tr> <tr> <td data-bbox="780 1312 1123 1361">NA</td> <td data-bbox="1123 1312 1481 1361">1.8 to 14.2 lbs</td> </tr> <tr> <td data-bbox="780 1361 1123 1411">≥ 6.1 lbs</td> <td data-bbox="1123 1361 1481 1411">≥ 4 lbs</td> </tr> <tr> <td data-bbox="780 1411 1123 1458">≥ 500</td> <td data-bbox="1123 1411 1481 1458">≥ 500</td> </tr> </tbody> </table>		SMA	SMB	4 in-lbs	NA	5.3 in-lbs	NA	NA	1.8 to 14.2 lbs	NA	1.8 to 14.2 lbs	≥ 6.1 lbs	≥ 4 lbs	≥ 500	≥ 500
SMA	SMB															
4 in-lbs	NA															
5.3 in-lbs	NA															
NA	1.8 to 14.2 lbs															
NA	1.8 to 14.2 lbs															
≥ 6.1 lbs	≥ 4 lbs															
≥ 500	≥ 500															
<div data-bbox="129 1601 531 1650" style="border: 1px solid black; padding: 2px;">Environmental Data</div> <p data-bbox="129 1659 531 1883">Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS</p>	<p data-bbox="794 1659 1362 1883">-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant</p>															

Notice: JYEBAO reserves the right to make modifications deemed appropriate.