


ADS-B3PC3	BNC Plug to 3.5mm Plug 12GHz VSWR 1.2	50Ω
-----------	--	-----

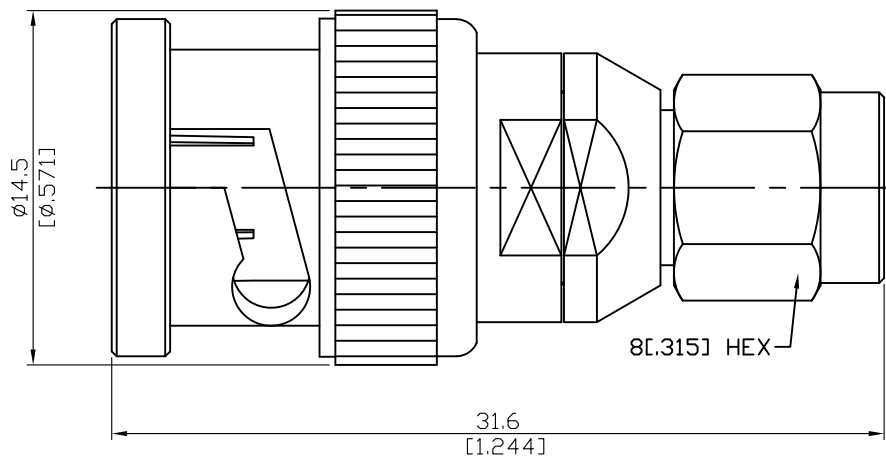

Parts	Material	Plating ( Micro-inch )
Coupling Nut	Stainless Steel	Passivated
Body	Stainless Steel	Passivated
Insulator (BNC)	Teflon	
Insulator (3.5)	PPO	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Retainer Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Spring	Spring Steel	


--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-B3PC3	BNC Plug to 3.5mm Plug 12GHz VSWR 1.2													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">3.5</th> <th style="width: 50%;">BNC</th> </tr> </thead> <tbody> <tr> <td>IEC60169-23</td> <td>MIL-STD-348B</td> </tr> <tr> <td>2.92 &amp; SMA</td> <td></td> </tr> </tbody> </table>	3.5	BNC	IEC60169-23	MIL-STD-348B	2.92 & SMA								
3.5	BNC													
IEC60169-23	MIL-STD-348B													
2.92 & SMA														
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;">DC To 12GHz</td> </tr> <tr> <td>≤ 1.2 (DC To 12GHz)</td> <td></td> </tr> <tr> <td>≤ 0.06 x √f(GHz) dB</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>1000 V rms</td> <td></td> </tr> <tr> <td>335 V rms</td> <td></td> </tr> </tbody> </table>		50Ω	DC To 12GHz	≤ 1.2 (DC To 12GHz)		≤ 0.06 x √f(GHz) dB		≥ 5000MΩ		1000 V rms		335 V rms	
50Ω	DC To 12GHz													
≤ 1.2 (DC To 12GHz)														
≤ 0.06 x √f(GHz) dB														
≥ 5000MΩ														
1000 V rms														
335 V rms														
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">3.5</th> <th style="width: 50%;">BNC</th> </tr> </thead> <tbody> <tr> <td>7.1 to 9.7 in-lbs</td> <td>0.6 to 2.5 in-lbs</td> </tr> <tr> <td>15 in-lbs</td> <td>NA</td> </tr> <tr> <td>≥ 60.7 lbs</td> <td>≥ 101.2 lbs</td> </tr> <tr> <td>≥ 6.1 lbs</td> <td>≥ 6.1 lbs</td> </tr> <tr> <td>≥ 500</td> <td>≥ 500</td> </tr> </tbody> </table>		3.5	BNC	7.1 to 9.7 in-lbs	0.6 to 2.5 in-lbs	15 in-lbs	NA	≥ 60.7 lbs	≥ 101.2 lbs	≥ 6.1 lbs	≥ 6.1 lbs	≥ 500	≥ 500
3.5	BNC													
7.1 to 9.7 in-lbs	0.6 to 2.5 in-lbs													
15 in-lbs	NA													
≥ 60.7 lbs	≥ 101.2 lbs													
≥ 6.1 lbs	≥ 6.1 lbs													
≥ 500	≥ 500													
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-55°C to +105°C</td> <td style="width: 50%;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td>MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td>Compliant</td> </tr> </tbody> </table>		-55°C to +105°C	MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant				
-55°C to +105°C	MIL-STD-202, Method 107, Condition B													
	MIL-STD-202, Method 206													
	MIL-STD-202, Method 101, Condition B													
	Compliant													

# ADS-B3PC3

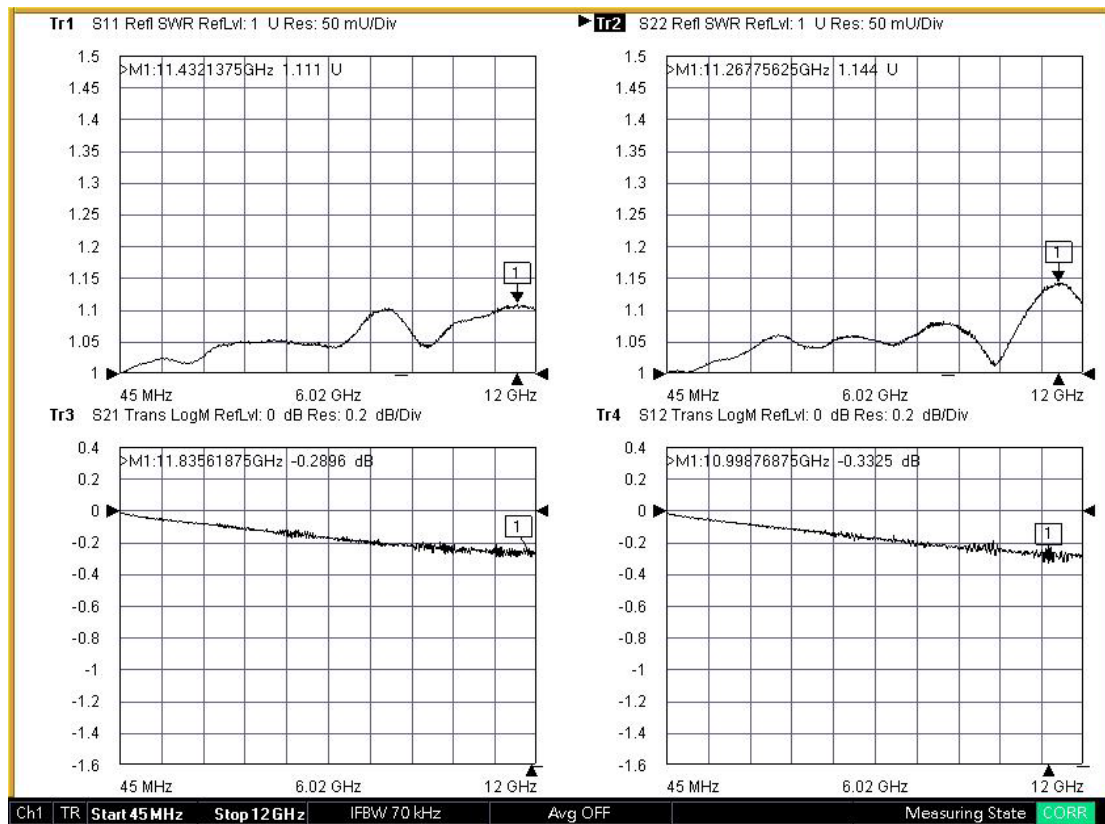

Note: S11/S12/S21/S22 plots shown represent IL and VSWR of two adaptors tested. To extract IL of a single adaptor divide IL measured by two.