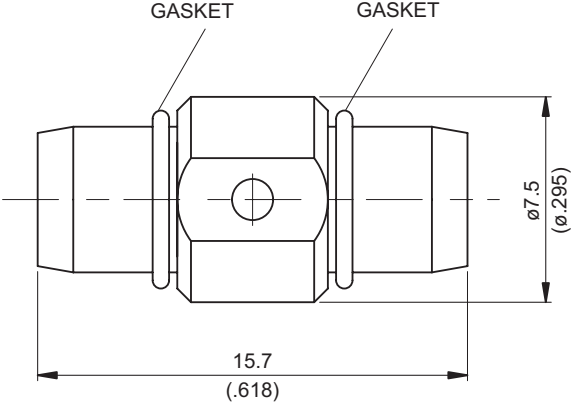


ADS-J3J3	Stainless BMA Plug To BMA Plug 18GHz VSWR 1.2		50Ω
			
Parts	Material	Plating (Micro-inch)	
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	
Insulator	Teflon		
Body	Stainless	Passivated	
Weight: 2.18 g			

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-J3J3	Stainless BMA Plug To BMA Plug 18GHz VSWR 1.2
<b>Interface</b> Standard	MIL-STD-348B
<b>Electrical Data</b> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	50Ω DC to 18GHz ≤ 1.2 (DC To 18GHz) ≤ 0.05 x √f(GHz) dB ≥ 5000MΩ 1500 V rms 1000 V rms
<b>Mechanical Data</b> Engagement Force Disengagement Force Contact Captivation-axial Durability (mating)	≤ 3 lbs ≤ 1.5 lbs ≥ 6.1 lbs ≥ 1000
<b>Environmental Data</b> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	-65°C to +165°C MIL-STD-202, Method 107, Condition B MIL-STD-202, Method 206 MIL-STD-202, Method 101, Condition B Compliant

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

# ADS-J3J3

