


ADS-K3SA3-1.15	2.92mm Plug to SSMA Plug 40GHz VSWR 1.15	50Ω
----------------	---	-----

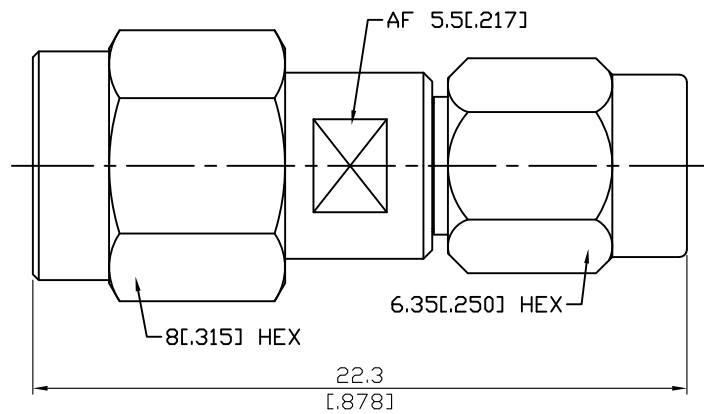

Parts	Material	Plating ( Micro-inch )
Coupling Nut	Stainless Steel	Passivated
Body	Stainless Steel	Passivated
Insulator (2.92)	PEI	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Gasket	Silicone	
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator (SSMA)	PTFE	

--	--

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K3SA3-1.15	2.92mm Plug to SSMA Plug 40GHz VSWR 1.15															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.92</th> <th style="width: 50%;">SSMA</th> </tr> </thead> <tbody> <tr> <td>MIL-STD-348B</td> <td>MIL-STD-348B</td> </tr> <tr> <td>3.5 &amp; SMA</td> <td></td> </tr> </tbody> </table>	2.92	SSMA	MIL-STD-348B	MIL-STD-348B	3.5 & SMA										
2.92	SSMA															
MIL-STD-348B	MIL-STD-348B															
3.5 & SMA																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">50Ω</td> <td style="width: 50%;"></td> </tr> <tr> <td>DC To 40GHz</td> <td></td> </tr> <tr> <td>≤ 1.15 (DC To 40GHz)</td> <td></td> </tr> <tr> <td>≤ 0.05 x √f(GHz) dB</td> <td></td> </tr> <tr> <td>≥ 5000MΩ</td> <td></td> </tr> <tr> <td>750 V rms</td> <td></td> </tr> <tr> <td>250 V rms</td> <td></td> </tr> </tbody> </table>		50Ω		DC To 40GHz		≤ 1.15 (DC To 40GHz)		≤ 0.05 x √f(GHz) dB		≥ 5000MΩ		750 V rms		250 V rms	
50Ω																
DC To 40GHz																
≤ 1.15 (DC To 40GHz)																
≤ 0.05 x √f(GHz) dB																
≥ 5000MΩ																
750 V rms																
250 V rms																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.92</th> <th style="width: 50%;">SSMA</th> </tr> </thead> <tbody> <tr> <td>11.47 in-lbs</td> <td>4 in-lbs</td> </tr> <tr> <td>15 in-lbs</td> <td>5 in-lbs</td> </tr> <tr> <td>≥ 4.9 lbs</td> <td>≥ 5 lbs</td> </tr> <tr> <td>≥ 500</td> <td>≥ 500</td> </tr> </tbody> </table>	2.92	SSMA	11.47 in-lbs	4 in-lbs	15 in-lbs	5 in-lbs	≥ 4.9 lbs	≥ 5 lbs	≥ 500	≥ 500					
2.92	SSMA															
11.47 in-lbs	4 in-lbs															
15 in-lbs	5 in-lbs															
≥ 4.9 lbs	≥ 5 lbs															
≥ 500	≥ 500															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%;"> <tbody> <tr> <td style="width: 50%;">-40°C to +165°C</td> <td style="width: 50%;"></td> </tr> <tr> <td>MIL-STD-202, Method 107, Condition B</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 206</td> <td></td> </tr> <tr> <td>MIL-STD-202, Method 101, Condition B</td> <td></td> </tr> <tr> <td>Compliant</td> <td></td> </tr> </tbody> </table>		-40°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant					
-40°C to +165°C																
MIL-STD-202, Method 107, Condition B																
MIL-STD-202, Method 206																
MIL-STD-202, Method 101, Condition B																
Compliant																