


ADS-K8-2.4/3-1.1

2.92mm Jack To 2.4mm Plug
40GHz VSWR 1.1

50Ω

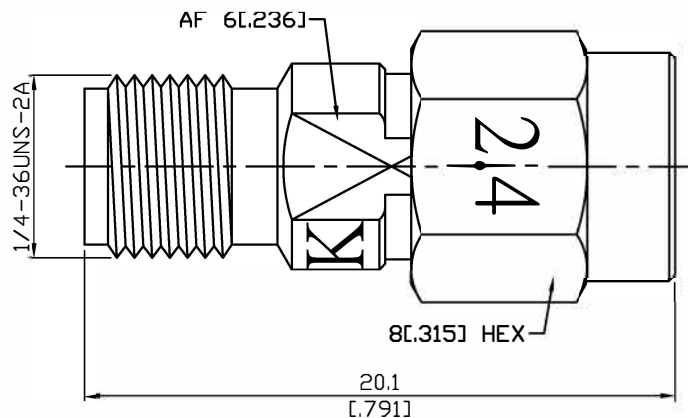

Parts	Material	Plating (Micro-inch)
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K8-2.4/3-1.1	2.92mm Jack To 2.4mm Plug 40GHz VSWR 1.1																																						
<table border="1"> <tr> <td data-bbox="113 324 531 392">Interface</td> <td data-bbox="531 324 778 392"></td> <td data-bbox="778 324 1123 392">2.4</td> <td data-bbox="1123 324 1479 392">2.92</td> </tr> <tr> <td data-bbox="113 392 531 443">Standard</td> <td data-bbox="531 392 778 443"></td> <td data-bbox="778 392 1123 443">MIL-STD-348B</td> <td data-bbox="1123 392 1479 443">MIL-STD-348B</td> </tr> <tr> <td data-bbox="113 443 531 584">Mechanically compatible with</td> <td data-bbox="531 443 778 584"></td> <td data-bbox="778 443 1123 584">1.85</td> <td data-bbox="1123 443 1479 584">SMA & 3.5</td> </tr> </table>	Interface		2.4	2.92	Standard		MIL-STD-348B	MIL-STD-348B	Mechanically compatible with		1.85	SMA & 3.5																											
Interface		2.4	2.92																																				
Standard		MIL-STD-348B	MIL-STD-348B																																				
Mechanically compatible with		1.85	SMA & 3.5																																				
<table border="1"> <tr> <td data-bbox="113 584 531 651">Electrical Data</td> <td data-bbox="531 584 778 651"></td> <td data-bbox="778 584 1123 651"></td> <td data-bbox="1123 584 1479 651"></td> </tr> <tr> <td data-bbox="113 651 531 703">Impedance</td> <td data-bbox="531 651 778 703"></td> <td data-bbox="778 651 1123 703">50Ω</td> <td data-bbox="1123 651 1479 703"></td> </tr> <tr> <td data-bbox="113 703 531 754">Frequency Range</td> <td data-bbox="531 703 778 754"></td> <td data-bbox="778 703 1123 754">DC To 40GHz</td> <td data-bbox="1123 703 1479 754"></td> </tr> <tr> <td data-bbox="113 754 531 806">VSWR</td> <td data-bbox="531 754 778 806"></td> <td data-bbox="778 754 1123 806">≤ 1.1 (DC To 40GHz)</td> <td data-bbox="1123 754 1479 806"></td> </tr> <tr> <td data-bbox="113 806 531 857">Insertion Loss</td> <td data-bbox="531 806 778 857"></td> <td data-bbox="778 806 1123 857">≤ 0.05 x √f(GHz) dB</td> <td data-bbox="1123 806 1479 857"></td> </tr> <tr> <td data-bbox="113 857 531 909">Insulation Resistance</td> <td data-bbox="531 857 778 909"></td> <td data-bbox="778 857 1123 909">≥ 5000MΩ</td> <td data-bbox="1123 857 1479 909"></td> </tr> <tr> <td data-bbox="113 909 531 960">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="531 909 778 960"></td> <td data-bbox="778 909 1123 960">500 V rms</td> <td data-bbox="1123 909 1479 960"></td> </tr> <tr> <td data-bbox="113 960 531 1012">Working Voltage (at sea level)</td> <td data-bbox="531 960 778 1012"></td> <td data-bbox="778 960 1123 1012">150 V rms</td> <td data-bbox="1123 960 1479 1012"></td> </tr> <tr> <td data-bbox="113 1012 531 1131">RF leakage</td> <td data-bbox="531 1012 778 1131"></td> <td data-bbox="778 1012 1123 1131">≥ 100dB to 1GHz</td> <td data-bbox="1123 1012 1479 1131"></td> </tr> </table>	Electrical Data				Impedance		50Ω		Frequency Range		DC To 40GHz		VSWR		≤ 1.1 (DC To 40GHz)		Insertion Loss		≤ 0.05 x √f(GHz) dB		Insulation Resistance		≥ 5000MΩ		Dielectric Withstanding Voltage (at sea level)		500 V rms		Working Voltage (at sea level)		150 V rms		RF leakage		≥ 100dB to 1GHz				
Electrical Data																																							
Impedance		50Ω																																					
Frequency Range		DC To 40GHz																																					
VSWR		≤ 1.1 (DC To 40GHz)																																					
Insertion Loss		≤ 0.05 x √f(GHz) dB																																					
Insulation Resistance		≥ 5000MΩ																																					
Dielectric Withstanding Voltage (at sea level)		500 V rms																																					
Working Voltage (at sea level)		150 V rms																																					
RF leakage		≥ 100dB to 1GHz																																					
<table border="1"> <tr> <td data-bbox="113 1131 531 1198">Mechanical Data</td> <td data-bbox="531 1131 778 1198"></td> <td data-bbox="778 1131 1123 1198">2.4</td> <td data-bbox="1123 1131 1479 1198">2.92</td> </tr> <tr> <td data-bbox="113 1198 531 1249">Recommended Coupling Nut Torque</td> <td data-bbox="531 1198 778 1249"></td> <td data-bbox="778 1198 1123 1249">7.08 to 9.74 in-lbs</td> <td data-bbox="1123 1198 1479 1249">11.47 in-lbs</td> </tr> <tr> <td data-bbox="113 1249 531 1301">Coupling Proof Torque</td> <td data-bbox="531 1249 778 1301"></td> <td data-bbox="778 1249 1123 1301">15 in-lbs</td> <td data-bbox="1123 1249 1479 1301">15 in-lbs</td> </tr> <tr> <td data-bbox="113 1301 531 1352">Contact Captivation-axial</td> <td data-bbox="531 1301 778 1352"></td> <td data-bbox="778 1301 1123 1352">≥ 4.5 lbs</td> <td data-bbox="1123 1301 1479 1352">≥ 4.9 lbs</td> </tr> <tr> <td data-bbox="113 1352 531 1485">Durability (mating)</td> <td data-bbox="531 1352 778 1485"></td> <td data-bbox="778 1352 1123 1485">≥ 500</td> <td data-bbox="1123 1352 1479 1485">≥ 500</td> </tr> </table>	Mechanical Data		2.4	2.92	Recommended Coupling Nut Torque		7.08 to 9.74 in-lbs	11.47 in-lbs	Coupling Proof Torque		15 in-lbs	15 in-lbs	Contact Captivation-axial		≥ 4.5 lbs	≥ 4.9 lbs	Durability (mating)		≥ 500	≥ 500																			
Mechanical Data		2.4	2.92																																				
Recommended Coupling Nut Torque		7.08 to 9.74 in-lbs	11.47 in-lbs																																				
Coupling Proof Torque		15 in-lbs	15 in-lbs																																				
Contact Captivation-axial		≥ 4.5 lbs	≥ 4.9 lbs																																				
Durability (mating)		≥ 500	≥ 500																																				
<table border="1"> <tr> <td data-bbox="113 1485 531 1552">Environmental Data</td> <td data-bbox="531 1485 778 1552"></td> <td data-bbox="778 1485 1123 1552"></td> <td data-bbox="1123 1485 1479 1552"></td> </tr> <tr> <td data-bbox="113 1552 531 1603">Temperature Range</td> <td data-bbox="531 1552 778 1603"></td> <td data-bbox="778 1552 1123 1603">-55°C to +105°C</td> <td data-bbox="1123 1552 1479 1603"></td> </tr> <tr> <td data-bbox="113 1603 531 1655">Thermal Shock</td> <td data-bbox="531 1603 778 1655"></td> <td data-bbox="778 1603 1123 1655">MIL-STD-202, Method 107, Condition B</td> <td data-bbox="1123 1603 1479 1655"></td> </tr> <tr> <td data-bbox="113 1655 531 1706">Moisture Resistance</td> <td data-bbox="531 1655 778 1706"></td> <td data-bbox="778 1655 1123 1706">MIL-STD-202, Method 206</td> <td data-bbox="1123 1655 1479 1706"></td> </tr> <tr> <td data-bbox="113 1706 531 1758">Corrosion</td> <td data-bbox="531 1706 778 1758"></td> <td data-bbox="778 1706 1123 1758">MIL-STD-202, Method 101, Condition B</td> <td data-bbox="1123 1706 1479 1758"></td> </tr> <tr> <td data-bbox="113 1758 531 2072">RoHS</td> <td data-bbox="531 1758 778 2072"></td> <td data-bbox="778 1758 1123 2072">Compliant</td> <td data-bbox="1123 1758 1479 2072"></td> </tr> </table>	Environmental Data				Temperature Range		-55°C to +105°C		Thermal Shock		MIL-STD-202, Method 107, Condition B		Moisture Resistance		MIL-STD-202, Method 206		Corrosion		MIL-STD-202, Method 101, Condition B		RoHS		Compliant																
Environmental Data																																							
Temperature Range		-55°C to +105°C																																					
Thermal Shock		MIL-STD-202, Method 107, Condition B																																					
Moisture Resistance		MIL-STD-202, Method 206																																					
Corrosion		MIL-STD-202, Method 101, Condition B																																					
RoHS		Compliant																																					

ADS-K8-2.4/3-1.1

