


ADS-K8K8-BF-GBVH

Hermetic 1×10^{-8} atm cc/sec & bulkhead side thermo vaccum 1×10^{-6} Torr
2.92mm jack to 2.92mm jack bulkhead, 40GHz VSWR 1.35

50Ω

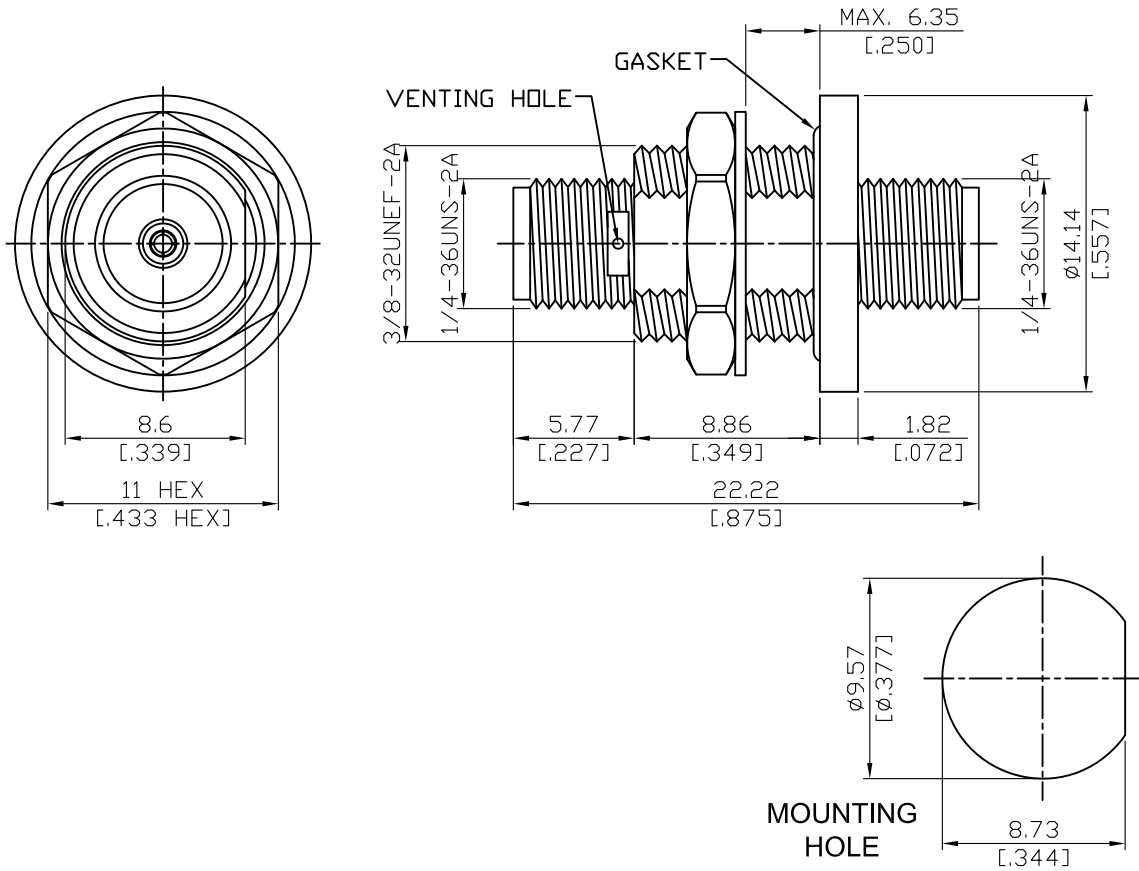

Parts	Material	Plating (Micro-inch)
Hex Nut	Stainless Steel	Passivated
Lock Washer	Stainless Steel	Passivated
Gasket	VITON	
Glass Seal	Kovar+Glass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PEI	
Flange Body	Stainless Steel	Gold 5 Over Nickel 50
Body	Stainless Steel	Passivated

This part number complies with RoHS.


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K8K8-BF-GBVH	Hermetic 1×10^{-8} atm cc/sec & bulkhead side thermo vacuum 1×10^{-6} Torr 2.92mm jack to 2.92mm jack bulkhead, 40GHz VSWR 1.35																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 344 531 394">Interface</td> </tr> <tr> <td data-bbox="129 405 774 488">Standard Mechanically compatible with</td> <td data-bbox="794 405 1482 488">MIL-STD-348B 3.5 & SMA</td> </tr> </table>		Interface		Standard Mechanically compatible with	MIL-STD-348B 3.5 & SMA														
Interface																			
Standard Mechanically compatible with	MIL-STD-348B 3.5 & SMA																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 607 531 656">Electrical Data</td> </tr> <tr> <td data-bbox="129 667 774 696">Impedance</td> <td data-bbox="794 667 1482 696">50Ω</td> </tr> <tr> <td data-bbox="129 707 774 741">Frequency Range</td> <td data-bbox="794 707 1482 741">DC to 40GHz</td> </tr> <tr> <td data-bbox="129 752 774 786">VSWR</td> <td data-bbox="794 752 1482 786">≤ 1.35 (DC To 40GHz)</td> </tr> <tr> <td data-bbox="129 797 774 831">Insertion Loss</td> <td data-bbox="794 797 1482 831">$\leq 0.08 \times \sqrt{f(\text{GHz})}$ dB</td> </tr> <tr> <td data-bbox="129 842 774 875">Insulation Resistance</td> <td data-bbox="794 842 1482 875">$\geq 5000\text{M}\Omega$</td> </tr> <tr> <td data-bbox="129 887 774 920">Dielectric Withstanding Voltage (at sea level)</td> <td data-bbox="794 887 1482 920">750 V rms</td> </tr> <tr> <td data-bbox="129 931 774 965">Working Voltage (at sea level)</td> <td data-bbox="794 931 1482 965">250 V rms</td> </tr> <tr> <td data-bbox="129 976 774 1010">RF Leakage</td> <td data-bbox="794 976 1482 1010">$\geq 100\text{dB}$ to 1GHz</td> </tr> </table>		Electrical Data		Impedance	50Ω	Frequency Range	DC to 40GHz	VSWR	≤ 1.35 (DC To 40GHz)	Insertion Loss	$\leq 0.08 \times \sqrt{f(\text{GHz})}$ dB	Insulation Resistance	$\geq 5000\text{M}\Omega$	Dielectric Withstanding Voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms	RF Leakage	$\geq 100\text{dB}$ to 1GHz
Electrical Data																			
Impedance	50Ω																		
Frequency Range	DC to 40GHz																		
VSWR	≤ 1.35 (DC To 40GHz)																		
Insertion Loss	$\leq 0.08 \times \sqrt{f(\text{GHz})}$ dB																		
Insulation Resistance	$\geq 5000\text{M}\Omega$																		
Dielectric Withstanding Voltage (at sea level)	750 V rms																		
Working Voltage (at sea level)	250 V rms																		
RF Leakage	$\geq 100\text{dB}$ to 1GHz																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1155 531 1205">Mechanical Data</td> </tr> <tr> <td data-bbox="129 1216 774 1249">Recommended Coupling Nut Torque</td> <td data-bbox="794 1216 1482 1249">11.47 in-lbs</td> </tr> <tr> <td data-bbox="129 1261 774 1294">Coupling Proof Torque</td> <td data-bbox="794 1261 1482 1294">15 in-lbs</td> </tr> <tr> <td data-bbox="129 1305 774 1339">Contact Captivation-axial</td> <td data-bbox="794 1305 1482 1339">≥ 4.9 lbs</td> </tr> <tr> <td data-bbox="129 1350 774 1384">Durability (mating)</td> <td data-bbox="794 1350 1482 1384">≥ 500</td> </tr> </table>		Mechanical Data		Recommended Coupling Nut Torque	11.47 in-lbs	Coupling Proof Torque	15 in-lbs	Contact Captivation-axial	≥ 4.9 lbs	Durability (mating)	≥ 500								
Mechanical Data																			
Recommended Coupling Nut Torque	11.47 in-lbs																		
Coupling Proof Torque	15 in-lbs																		
Contact Captivation-axial	≥ 4.9 lbs																		
Durability (mating)	≥ 500																		
<table border="0"> <tr> <td colspan="2" data-bbox="129 1507 531 1556">Environmental Data</td> </tr> <tr> <td data-bbox="129 1563 774 1597">Temperature Range</td> <td data-bbox="794 1563 1482 1597">-10°C to $+165^{\circ}\text{C}$</td> </tr> <tr> <td data-bbox="129 1608 774 1641">Thermal Shock</td> <td data-bbox="794 1608 1482 1641">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td data-bbox="129 1653 774 1686">Moisture Resistance</td> <td data-bbox="794 1653 1482 1686">MIL-STD-202, Method 206</td> </tr> <tr> <td data-bbox="129 1697 774 1731">Corrosion</td> <td data-bbox="794 1697 1482 1731">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td data-bbox="129 1742 774 1776">RoHS</td> <td data-bbox="794 1742 1482 1776">Compliant</td> </tr> </table>		Environmental Data		Temperature Range	-10°C to $+165^{\circ}\text{C}$	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant						
Environmental Data																			
Temperature Range	-10°C to $+165^{\circ}\text{C}$																		
Thermal Shock	MIL-STD-202, Method 107, Condition B																		
Moisture Resistance	MIL-STD-202, Method 206																		
Corrosion	MIL-STD-202, Method 101, Condition B																		
RoHS	Compliant																		


Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K8K8-BF-GBVH


Tr1 S11 Refl SWR RefLvl: 1 U Res: 50 mU/Div

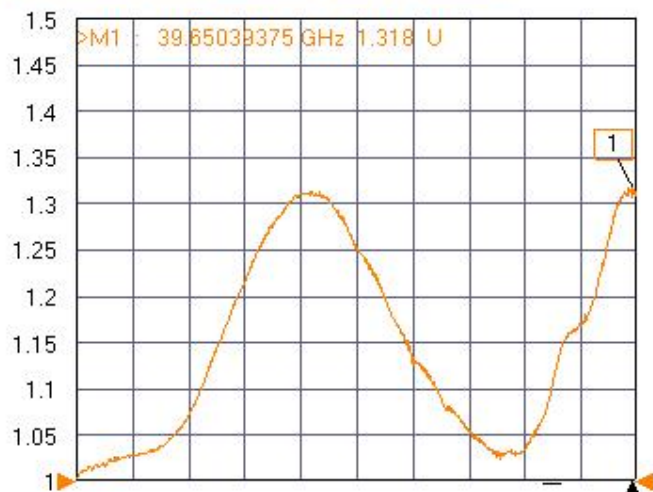

Tr2 S22 Refl SWR RefLvl: 1 U Res: 50 mU/Div

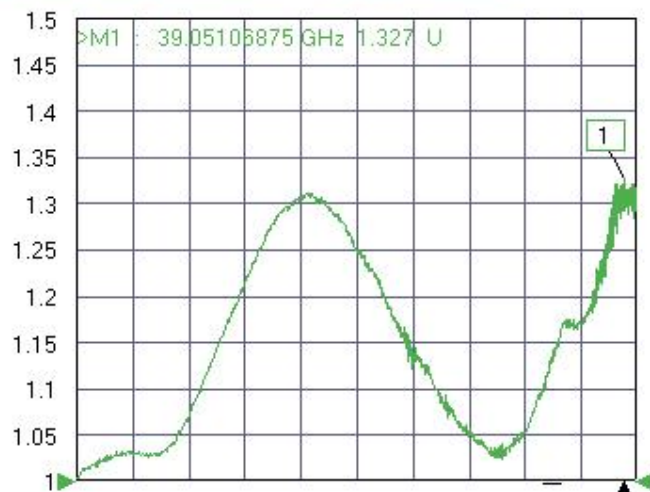

Tr3 S21 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

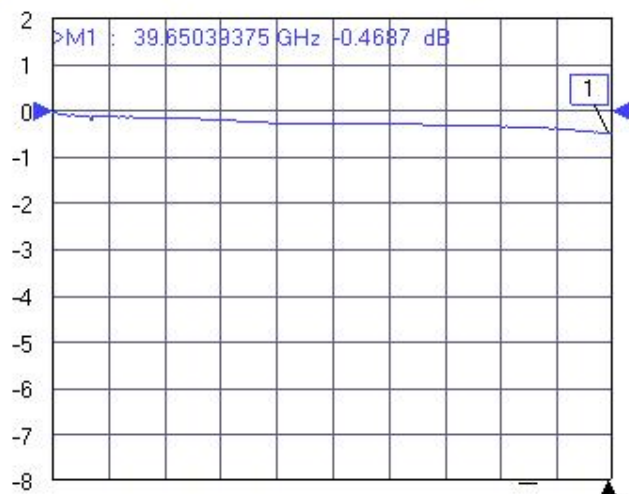

Tr4 S12 Trans LogM RefLvl: 0 dB Res: 1 dB/Div

