


ADS-K8PS3	2.92mm Jack To SMP Plug Smooth Bore 40GHz VSWR 1.3	50Ω
-----------	---	-----

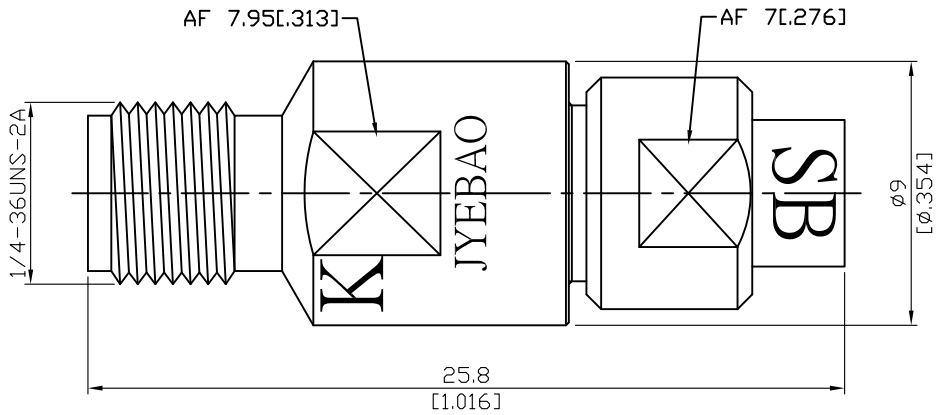

Parts	Material	Plating (Micro-inch)
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Body	Stainless Steel	Passivated


--	--

This part number complies with RoHS.
 Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K8PS3	2.92mm Jack To SMP Plug Smooth Bore 40GHz VSWR 1.3			
Interface	2.92	SMP		
Standard	MIL-STD-348B	MIL-STD-348B		
Mechanically compatible with	3.5 & SMA			
Electrical Data				
Impedance	50Ω			
Frequency Range	DC To 40GHz			
VSWR	≤ 1.3 (DC To 40GHz)			
Insertion Loss	≤ 0.06 x √f(GHz) dB			
Insulation Resistance	≥ 5000MΩ			
Dielectric Withstanding Voltage (at sea level)	500 V rms			
Working Voltage (at sea level)	250 V rms			
Mechanical Data	2.92	SMP		
		Full detent	Limited detent	Smooth bore Catchers Mit
Recommended Coupling Nut Torque	11.47 in-lbs	NA	NA	NA
Coupling Proof Torque	15 in-lbs	NA	NA	NA
Contact Captivation-axial	≥ 4.9 lbs	NA	NA	NA
Durability (mating)	≥ 500	≥ 100	≥ 500	≥ 1000
Engagement Force	NA	≤ 15 lbs	≤ 10 lbs	≤ 2 lbs
Disengagement Force	NA	≥ 5 lbs	≥ 2 lbs	≥ 0.5 lbs
Axial Misalignment	NA	+0.00/-0.25(+.000/-0.010)		
Radial Misalignment	NA	+/-0.25(0.010)		
Environmental Data				
Temperature Range	-55°C to +105°C			
Thermal Shock	MIL-STD-202, Method 107, Condition B			
Moisture Resistance	MIL-STD-202, Method 206			
Corrosion	MIL-STD-202, Method 101, Condition B			
RoHS	Compliant			

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-K8PS3

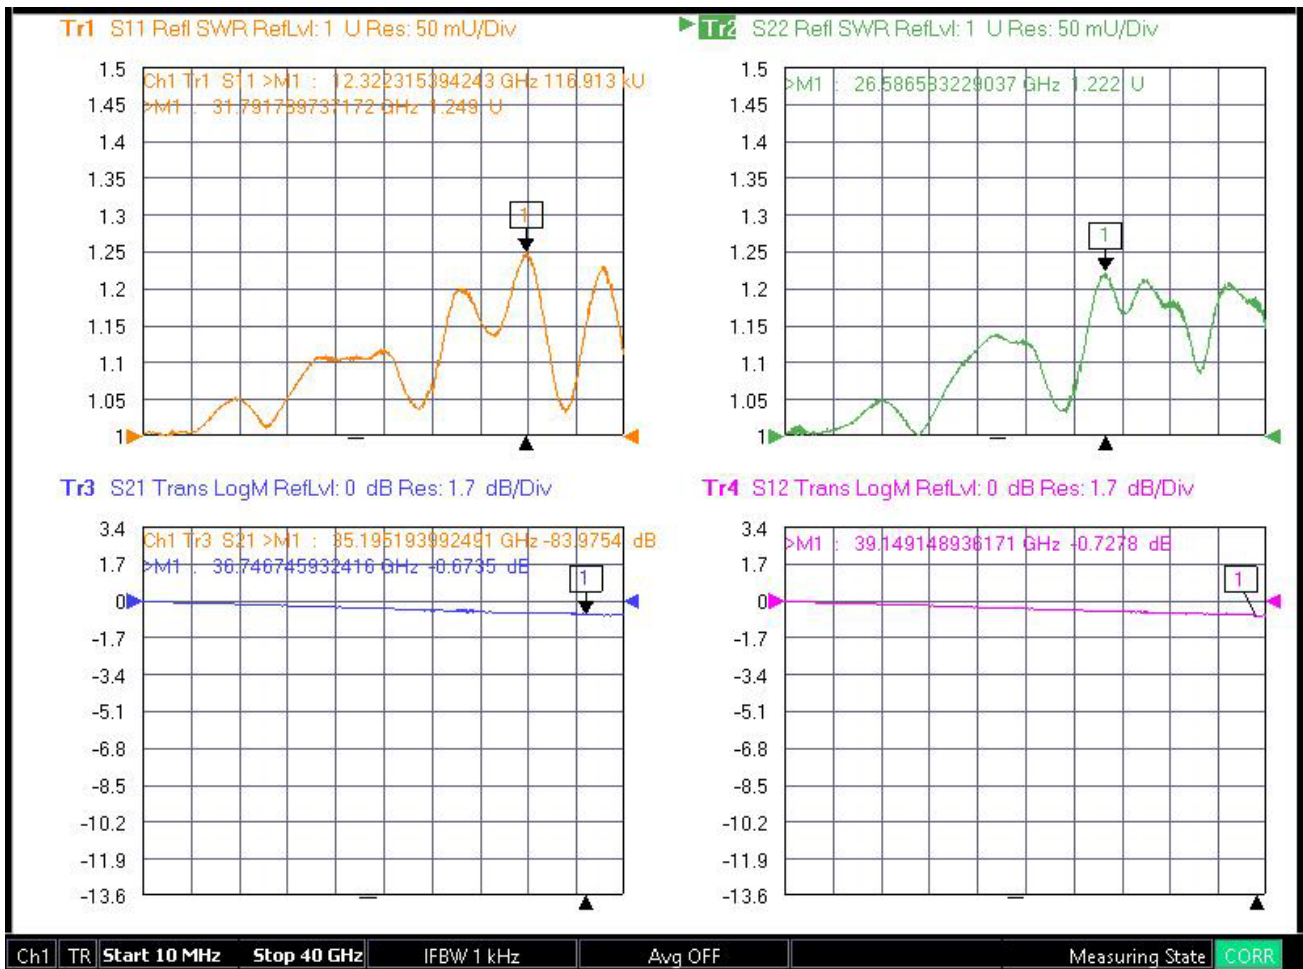

Note: S11/S12/S21/S22 plots shown represent IL and VSWR of two adaptors tested. To extract IL of a single adaptor divide IL measured by two.