


ADS-KQ3K8-P2-1.35

Snap On 2.92mm Plug Blindmate to 2.92mm Jack
2 Hole Flange; 40GHz VSWR 1.35

50Ω

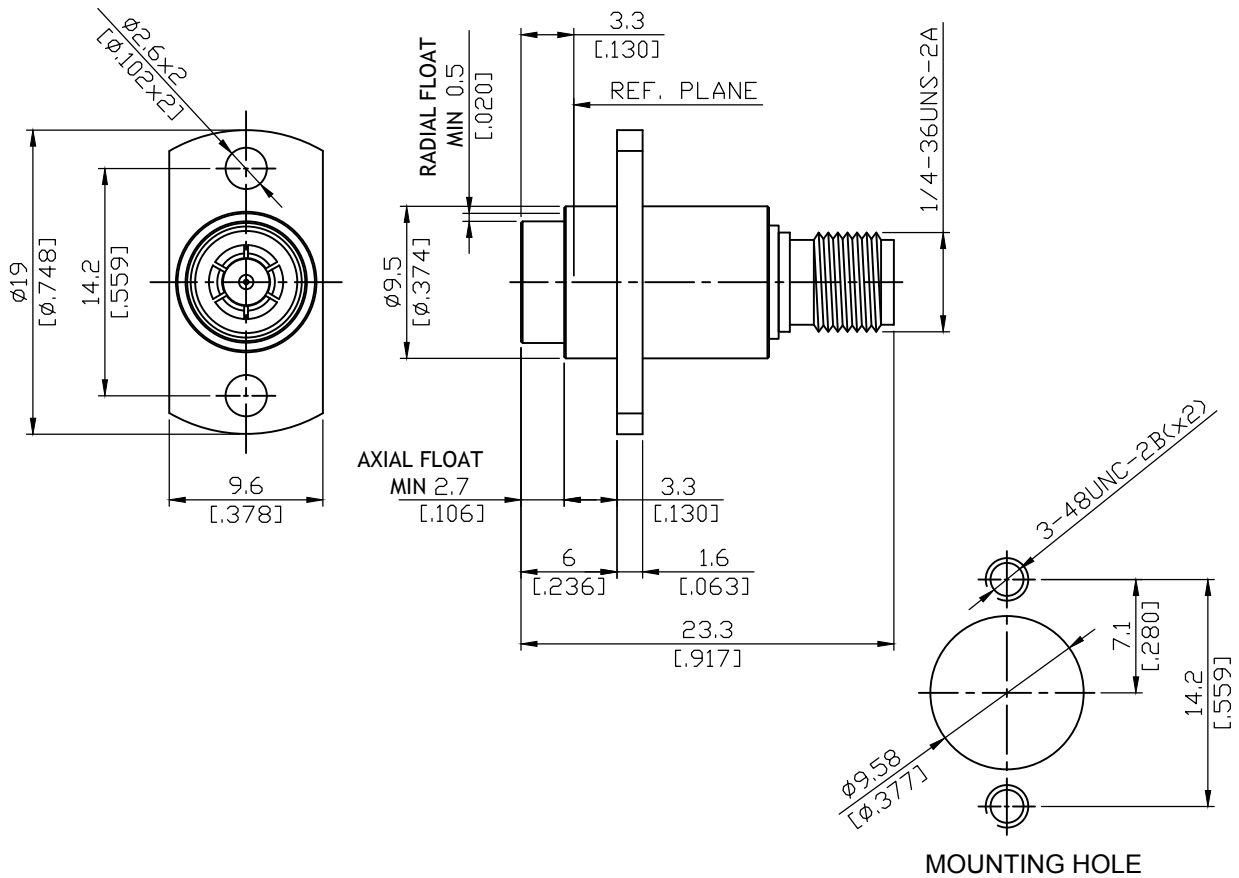

Parts	Material	Plating (Micro-inch)
Body	Stainless Steel	Passivated
Contact Body	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PPO	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Spring	Stainless Steel	Passivated
C-Ring	Stainless Steel	Passivated

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-KQ3K8-P2-1.35	Snap On 2.92mm Plug Blindmate to 2.92mm Jack 2 Hole Flange; 40GHz VSWR 1.35																	
<div style="border: 1px solid black; padding: 2px;">Interface</div> <p>Standard Mechanically compatible with</p>	<p style="text-align: center;">2.92mm Plug Snap On Side</p> <hr/> <p style="text-align: center;">Per JYEBAO Snap On 2.92mm Plug</p> <hr/> <p style="text-align: center;">3.5 & SMA</p>	<p style="text-align: center;">2.92mm Jack Screw Side</p> <hr/> <p style="text-align: center;">MIL-STD-348B</p> <hr/> <p style="text-align: center;">3.5 & SMA</p>																
<div style="border: 1px solid black; padding: 2px;">Electrical Data</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%;">Impedance</td> <td style="text-align: right;">50Ω</td> </tr> <tr> <td>Frequency Range</td> <td style="text-align: right;">DC to 40GHz</td> </tr> <tr> <td>VSWR</td> <td style="text-align: right;">≤ 1.35 (DC To 40GHz)</td> </tr> <tr> <td>Insertion Loss</td> <td style="text-align: right;">≤ 0.08 x √f(GHz) dB</td> </tr> <tr> <td>Insulation Resistance</td> <td style="text-align: right;">≥ 5000MΩ</td> </tr> <tr> <td>Dielectric Withstanding Voltage (at sea level)</td> <td style="text-align: right;">750 V rms</td> </tr> <tr> <td>Working Voltage (at sea level)</td> <td style="text-align: right;">250 V rms</td> </tr> <tr> <td>RF Leakage</td> <td style="text-align: right;">≥ 100dB to 1GHz</td> </tr> </table>			Impedance	50Ω	Frequency Range	DC to 40GHz	VSWR	≤ 1.35 (DC To 40GHz)	Insertion Loss	≤ 0.08 x √f(GHz) dB	Insulation Resistance	≥ 5000MΩ	Dielectric Withstanding Voltage (at sea level)	750 V rms	Working Voltage (at sea level)	250 V rms	RF Leakage	≥ 100dB to 1GHz
Impedance	50Ω																	
Frequency Range	DC to 40GHz																	
VSWR	≤ 1.35 (DC To 40GHz)																	
Insertion Loss	≤ 0.08 x √f(GHz) dB																	
Insulation Resistance	≥ 5000MΩ																	
Dielectric Withstanding Voltage (at sea level)	750 V rms																	
Working Voltage (at sea level)	250 V rms																	
RF Leakage	≥ 100dB to 1GHz																	
<div style="border: 1px solid black; padding: 2px;">Mechanical Data</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 45%;">Recommended Coupling Nut Torque</td> <td style="text-align: right;">11.47 in-lbs (Not applicable on snap on side)</td> </tr> <tr> <td>Coupling Proof Torque</td> <td style="text-align: right;">15 in-lbs (Not applicable on snap on side)</td> </tr> <tr> <td>Contact Captivation-axial</td> <td style="text-align: right;">≥ 4.9 lbs</td> </tr> <tr> <td>Durability (mating)</td> <td style="text-align: right;">≥ 500</td> </tr> </table>			Recommended Coupling Nut Torque	11.47 in-lbs (Not applicable on snap on side)	Coupling Proof Torque	15 in-lbs (Not applicable on snap on side)	Contact Captivation-axial	≥ 4.9 lbs	Durability (mating)	≥ 500								
Recommended Coupling Nut Torque	11.47 in-lbs (Not applicable on snap on side)																	
Coupling Proof Torque	15 in-lbs (Not applicable on snap on side)																	
Contact Captivation-axial	≥ 4.9 lbs																	
Durability (mating)	≥ 500																	
<div style="border: 1px solid black; padding: 2px;">Environmental Data</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 45%;">Temperature Range</td> <td style="text-align: right;">-55°C to +105°C</td> </tr> <tr> <td>Thermal Shock</td> <td style="text-align: right;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td>Moisture Resistance</td> <td style="text-align: right;">MIL-STD-202, Method 206</td> </tr> <tr> <td>Corrosion</td> <td style="text-align: right;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td>RoHS</td> <td style="text-align: right;">Compliant</td> </tr> </table>			Temperature Range	-55°C to +105°C	Thermal Shock	MIL-STD-202, Method 107, Condition B	Moisture Resistance	MIL-STD-202, Method 206	Corrosion	MIL-STD-202, Method 101, Condition B	RoHS	Compliant						
Temperature Range	-55°C to +105°C																	
Thermal Shock	MIL-STD-202, Method 107, Condition B																	
Moisture Resistance	MIL-STD-202, Method 206																	
Corrosion	MIL-STD-202, Method 101, Condition B																	
RoHS	Compliant																	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-KQ3K8-P2-1.35

