


ADS-N3-2.4/3

N Plug To 2.4 Plug  
18GHz VSWR 1.15

50Ω

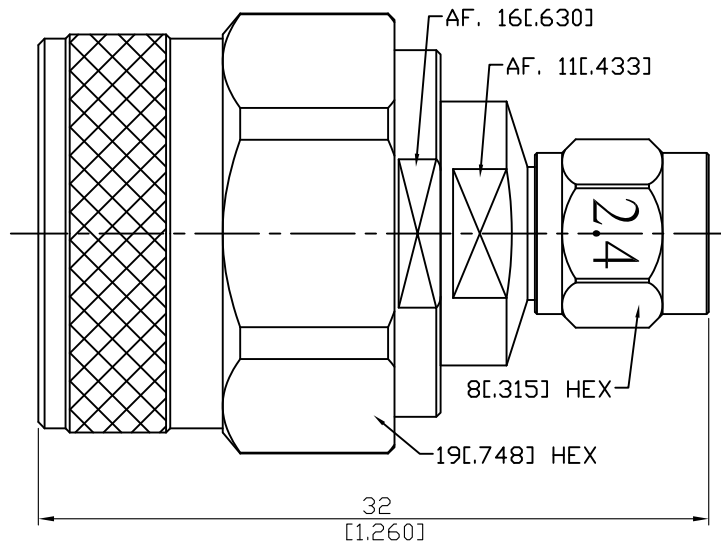

Parts	Material	Plating ( Micro-inch )
Retainer Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Contact Pin	Beryllium Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	PTFE	
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated

Weight: 62.43 g

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

ADS-N3-2.4/3	N Plug To 2.4 Plug 18GHz VSWR 1.15															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Interface</div> Standard Mechanically compatible with	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.4</th> <th style="width: 50%;">N</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">MIL-STD-348B</td> <td style="text-align: center;">MIL-STD-348B</td> </tr> <tr> <td style="text-align: center;">1.85</td> <td></td> </tr> </tbody> </table>	2.4	N	MIL-STD-348B	MIL-STD-348B	1.85										
2.4	N															
MIL-STD-348B	MIL-STD-348B															
1.85																
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Electrical Data</div> Impedance Frequency Range VSWR Insertion Loss Insulation Resistance Dielectric Withstanding Voltage (at sea level) Working Voltage (at sea level)	<table style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">50Ω</td> </tr> <tr> <td></td> <td style="text-align: center;">DC to 18GHz</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 1.15 (DC to 18GHz)</td> </tr> <tr> <td></td> <td style="text-align: center;">≤ 0.03 x √f(GHz) dB</td> </tr> <tr> <td></td> <td style="text-align: center;">≥ 5000MΩ</td> </tr> <tr> <td></td> <td style="text-align: center;">500 V rms</td> </tr> <tr> <td></td> <td style="text-align: center;">150 V rms</td> </tr> </tbody> </table>			50Ω		DC to 18GHz		≤ 1.15 (DC to 18GHz)		≤ 0.03 x √f(GHz) dB		≥ 5000MΩ		500 V rms		150 V rms
	50Ω															
	DC to 18GHz															
	≤ 1.15 (DC to 18GHz)															
	≤ 0.03 x √f(GHz) dB															
	≥ 5000MΩ															
	500 V rms															
	150 V rms															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Mechanical Data</div> Recommended Coupling Nut Torque Coupling Proof Torque Coupling Nut Retention Force Contact Captivation-axial Durability (mating)	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">2.4</th> <th style="width: 50%;">N</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">7.08 to 9.74 inch lbs</td> <td style="text-align: center;">6 to 10 inch lbs</td> </tr> <tr> <td style="text-align: center;">15 inch lbs</td> <td style="text-align: center;">15 inch lbs</td> </tr> <tr> <td style="text-align: center;">≥ 60.7 lbs</td> <td style="text-align: center;">≥ 101.2 lbs</td> </tr> <tr> <td style="text-align: center;">≥ 4.5 lbs</td> <td style="text-align: center;">≥ 6.3 lbs</td> </tr> <tr> <td style="text-align: center;">≥ 500</td> <td style="text-align: center;">≥ 500</td> </tr> </tbody> </table>		2.4	N	7.08 to 9.74 inch lbs	6 to 10 inch lbs	15 inch lbs	15 inch lbs	≥ 60.7 lbs	≥ 101.2 lbs	≥ 4.5 lbs	≥ 6.3 lbs	≥ 500	≥ 500		
2.4	N															
7.08 to 9.74 inch lbs	6 to 10 inch lbs															
15 inch lbs	15 inch lbs															
≥ 60.7 lbs	≥ 101.2 lbs															
≥ 4.5 lbs	≥ 6.3 lbs															
≥ 500	≥ 500															
<div style="border: 1px solid black; padding: 2px; margin-bottom: 5px;">Environmental Data</div> Temperature Range Thermal Shock Moisture Resistance Corrosion RoHS	<table style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 50%;"></td> <td style="width: 50%; text-align: center;">-65°C to +165°C</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 107, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 206</td> </tr> <tr> <td></td> <td style="text-align: center;">MIL-STD-202, Method 101, Condition B</td> </tr> <tr> <td></td> <td style="text-align: center;">Compliant</td> </tr> </tbody> </table>			-65°C to +165°C		MIL-STD-202, Method 107, Condition B		MIL-STD-202, Method 206		MIL-STD-202, Method 101, Condition B		Compliant				
	-65°C to +165°C															
	MIL-STD-202, Method 107, Condition B															
	MIL-STD-202, Method 206															
	MIL-STD-202, Method 101, Condition B															
	Compliant															

# ADS-N3-2.4/3

